



深圳安博检测股份有限公司
Shenzhen Anbotek Compliance
Laboratory Limited

报告编号:R012101187B
Report No.

第 1 页,共 16 页
Page of

锂电池 UN38.3测试报告
Lithium Battery UN38.3 Test Report

委托单位(Client) : 深圳市鸿伟高能科技有限公司

Howell Energy Co., Ltd

生产工厂
(Manufacturer) : 深圳市鸿伟高能科技有限公司

Howell Energy Co., Ltd

样品名称(Product) : 可充式锂离子电池组
Rechargeable Lithium- Ion Battery Pack

样品型号(Model) : 18650 4S3P 10.2Ah

接收日期 : 2021年 01月 11日

Date of Receipt : Jan. 11, 2021

检测日期 : 2021年 01月 11日至 2021年 01月 28日

Date of Test : Jan. 11, 2021 to Jan. 28, 2021

批准 :
(Approved Signatory)

审核 :
Checked by

检测 :
Tested by

朱培华
陈学进
曾秋兰

报告专用章
Stamp



地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东

Adress: East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

电话(Tel): (86)755-26066061 传真(Fax): (86)755-26066021 网址(Website): www.anbotek.com

1.样品描述(SAMPLE DESCRIPTION):

样品名称: Sample Name	可充式锂离子电池组 Rechargeable Lithium- Ion Battery Pack		电池型号: Battery Model	18650 4S3P 10.2Ah	
委托单位: Client	深圳市鸿伟高能科技有限公司 Howell Energy Co., Ltd				
委托方地址 : Add. Of Client	深圳市龙岗中心城正中时代广场B座1010 B1010 Genzon Times Square, Longgang Center, Shenzhen, P.R, China				
生产工厂: Manufacturer	深圳市鸿伟高能科技有限公司 Howell Energy Co., Ltd				
标称电压 Nominal Voltage	14.8V	额定容量 Rated Capacity	10.2Ah 150.96Wh	商标 Trademark	/
充电电流 Charge Current	2000mA	最大连续 充电电流 Maximum Continuous Charge Current	5000mA	充电截止电流 End Charge Current	100mA
终止电压 Cut-off Voltage	11.0V	最大放电电流 Maximum Discharge Current	5000mA	充电限制电压 Limited Charge Voltage	16.8V
内含电芯个数 Cells Number	12	电芯型号 Cell Model	18650	电芯额定容量 Cell Rated Capacity	3400mAh
测试开始日期 Client date	2021年01月 11日 Jan. 11, 2021		测试结束日期 Finished date	2021年01月 28日 Jan. 28, 2021	

2.参考方法 (REFERENCE METHOD)

《联合国关于危险货物运输的建议书—试验和标准手册》
(ST/SG/AC.10/11/Rev.6/Amend.1&ST/SG/AC.10/11/Rev.6/Amend.1)
《United Nations Recommendations On The Transport Of Dangerous Goods, Manual Of Tests And Criteria》(ST/SG/AC.10/11/Rev.6/Amend.1&ST/SG/AC.10/11/Rev.6/Amend.1).

3. 测试项目 (TEST ITEM)

- | | |
|-------------------------------|---------------------------------|
| 1. 高度模拟 (Altitude simulation) | 5. 外部短路(External short circuit) |
| 2. 温度试验(Thermal test) | 6. 撞击(Impact) |
| 3. 振动(Vibration) | 7. 过度充电(Overcharge) |
| 4. 冲击(Shock) | 8. 强制放电(Forced discharge) |

4. 本次检测所使用的设备清单:

Major instruments of measurement used in the test:

设备名称/型号 Name of equipment /Model	编号 Serial No.	校准有效期 Due Date
模拟高空低压试验箱 Low Pressure Test Machine BE-DY-125	SE-132 SE-137	2022-03-10 2022-03-10
快速温变箱 High and Low Temperature Chamber BE-THK-150M8		
振动台 Vibration Machine EV103VT650VC Sub-2	SE-439 SE-440 SE-133	2022-10-19 2022-10-19 2022-03-10
机械冲击台 Shock Machine HSKT-10		
温控型短路试验机 Thermostat Short-circuit Testing Machine BE-1000W		
撞击试验机 Impact Machine BE-5060	SE-136 SE-172	2022-03-10 2022-10-19
25V10A 电池充放电仪 Battery Charge and Discharge Machine CT-3008-25V10A-NA		

5. 检测地点、环境条件

Place and Environmental Conditions of the test

地点: 深圳安博检测股份有限公司电池实验室
Place

温度 (20±5) °C 相对湿度 (40~70) %RH
Temperature R.H.

6. 测试结论(CONCLUSION)

测试项目 ITEM	样品编号 SAMPLE NUMBER	执行标准 STANDARD	结论 CONCLUSION
高度模拟 (Altitude simulation)	B1~B4, B5~B8	UN38.3	通过 (PASS)
温度试验(Thermal test)			通过 (PASS)
振动(Vibration)			通过 (PASS)
冲击(Shock)			通过 (PASS)
外部短路 (External short circuit)			通过 (PASS)
撞击(Impact)	C21~C25		通过 (PASS)
过度充电(Overcharge)	B1~B4, B5~B8		通过 (PASS)
强制放电 (Forced discharge)	C1~C10, C11~C20		通过 (PASS)

说明(Notes):

B1~B4为第一个充放电周期完全充电状态的电池;

Batteries at first cycle in fully charged states;

C21~C25:为第一个充放电周期 50%设计额定容量状态的电芯;

Cells at first cycle at 50% of the design rated capacity;

C1~C10:为第一个充放电周期完全放电状态的电芯;

Cells at first cycle in fully discharged states;

B5~B8:为 50个充放电周期后完全充电状态的电池;

Batteries after 50 cycles ending in fully charged states;

C11~C20:为 50个充放电周期后完全放电状态的电芯;

Cells after 50 cycles ending in fully discharged states.

7.测试方法 (TEST METHOD)

小型电池或电池组必须按顺序进行试验 T.1至 T.5。试验 T.6和 T.8应使用未另外试验过的电池或电池组。试验 T.7可以使用原先在试验 T.1至 T.5中使用过的未损坏电池组进行,以便测试交替充电放电过的电池组。

质量损失依照下式计算:

$$\text{质量损失(\%)} = (M_1 - M_2) / M_1 \times 100$$

式中 M1是实验前的质量, M2是试验后的质量。如质量损失不超过下表所列数值,即视为“无质量损失”。

Tests T.1 to T.5 shall be conducted in sequence on the same cell or battery. Tests T.6 and T.8 shall be conducted using not otherwise tested cells or batteries. Test T.7 may be conducted using undamaged batteries previously used in tests T.1 to T.5 for purposes of testing on cycled batteries.

In order to quantify the mass loss, the following procedure is provided:

$$\text{Mass loss(\%)} = (M_1 - M_2) / M_1 \times 100$$

Where M1 is the mass before the test and M2 is the mass after the test. When mass loss does not exceed the values in Table blow, it shall be considered as “no mass loss”.

电池或电池组质量 M Mass M of cell or battery	质量损失限值 Mass loss limit
M < 1克(g)	0.5%
1g ≤ M ≤ 75克(g)	0.2%
M > 75克(g)	0.1%

T.1高度模拟

试验电池和电池组应在压力等于或低于 11.6千帕和环境温度为(20℃±5℃)下存放至少 6小时。

要求电池和电池组无渗漏、无排气、无解体、无破裂、无起火,并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一实验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电池和电池组

T.1 Altitude simulation

Test cells and batteries shall be stored at a pressure of 11.6 kPa or less for at least six hours at ambient temperature (20 ± 5 °C).

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.2温度试验

试验电池和电池组应先在试验温度等于 72℃±2℃的条件下存放至少 6小时,接着再在试验温度等于-40℃±2℃的条件下存放至少 6小时。两个极端试验温度之间的最大时间间隔为 30分钟。此程序重复进行,完成 10次,接着将所有试验电池盒电池组在环境温度 (20℃±5℃)下存放 24小时。对于大型电池和电池组,暴露于极端试验温度的时间至少应为 12小时。

要求电池和电池组无渗漏、无排气、无解体、无破裂和无起火,并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电池和电池组

T.2 Thermal test

Test cells and batteries are to be stored for at least six hours at a test temperature equal to $72 \pm 2^\circ\text{C}$, followed by storage for at least six hours at a test temperature equal to $-40 \pm 2^\circ\text{C}$. The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient temperature ($20 \pm 5^\circ\text{C}$). For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.3 振动

电池和电池组紧固于振动机平台, 但不得造成电池变形, 并能准确可靠地传播振动。振动应是正弦波形, 对数扫描频率在 7Hz 和 200Hz 之间, 在回到 7Hz, 跨度为 15 分钟。这一振动过程须对三个相互垂直的电池安装方位的每一方向重复进行 12 次, 共为时 3 小时。其中一个振动方向必须与端面垂直。

作对数式频率扫描, 对总质量不足 12 千克的电池和电池组 (电池和小型电池组), 和对 12 千克及更大的电池组有所不同。

对电池和小型电池组: 从 7Hz 开始, 保持 1g 的最大加速度, 知道频率达到 18Hz。然后将振幅保持在 0.8mm (总位移 1.6mm), 并增加频率知道最大加速度达到 8g (频率约为 50Hz)。将最大加速度保持在 8g 直到频率增加到 200Hz。

对大型电池组: 从 7 赫兹开始保持 1gn 的峰值加速度直到频率达到 18 赫兹。然后将振幅保持在 0.8 毫米 (总行程 1.6 毫米) 并增加频率直到最大加速度达到 2gn (频率约为 25 赫兹)。将峰值加速度保持在 2gn 直到频率增加到 200 赫兹。

要求电池和电池组无渗漏、无排气、无解体、无破裂和无起火, 并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电池和电池组

T.3 Vibration

Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face.

The logarithmic frequency sweep shall differ for cells and batteries with a gross mass of not more than 12 kg (cells and small batteries), and for batteries with a gross mass of more than 12 kg (large batteries). For cells and small batteries: from 7 Hz a peak acceleration of 1 gn is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 8 gn occurs (approximately 50 Hz).

A peak acceleration of 8 gn is then maintained until the frequency is increased to 200 Hz.

For large batteries: from 7 Hz to a peak acceleration of 1 gn is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 8gn occurs (approximately 25 Hz). A peak acceleration of 2 gn is then maintained until the frequency is increased to 200 Hz.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire during the test and after the test and if the open circuit voltage of each test cell or battery directly after testing in its third perpendicular mounting position is not less than 90% of its voltage

immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.4冲击

试验电池和电池组用坚硬支架紧固在试验装置上, 支架支撑着每个试验电池组的所有安装面。每个电池和电池组须经受最大加速度 150g和脉冲持续时间 6毫秒的半正弦波冲击。每个电池或电池组须在三个互相垂直的电池或电池组安装方位的正方向经受三次冲击, 接着再反方向经受三次冲击, 总共经受 18次冲击。

大型电池和大型电池组须经受最大加速度 50g和脉冲持续时间 11毫秒的半正弦波冲击。每个电池或电池组须在三个相互垂直的安装方位的正方向经受三次冲击, 接着再反方向经受三次冲击, 总共经受 18次冲击。

要求电池和电池组无渗漏、无排气、无解体、无破裂和无起火, 并且每个试验电池或电池组在试验后的开路电压不小于其在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电池和电池组

T.4 Shock

Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery. Each cell or battery shall be subjected to a half-sine shock of peak acceleration of 150 gn and pulse duration of 6 milliseconds. Each cell or battery shall be subjected to three shocks in the positive direction followed by three shocks in the negative direction of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks. However, large cells and large batteries shall be subjected to a half-sine shock of peak acceleration of 50 gn and pulse duration of 11 milliseconds. Each cell or battery is subjected to three shocks in the positive direction followed by three shocks in the negative direction of each of three mutually perpendicular mounting positions of the cell for a total of 18 shocks.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.5外部短路

稳定待试验电池或电池组的温度, 使其外壳温度达到 $55^{\circ}\text{C} \pm 2^{\circ}\text{C}$, 然后使电池或电池组在 $55^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 下经受总外电阻小于 0.1欧姆的短路条件。这一短路条件应在电池或电池组外壳温度回到 $55^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 后持续至少 1小时。

要求电池和电池组外壳温度不超过 170°C , 并且在试验过程中及试验后 6小时内无解体, 无破裂, 无起火。

T.5 External short circuit

The cell or battery to be tested shall be temperature stabilized so that its external case temperature reaches $55 \pm 2^{\circ}\text{C}$ and then the cell or battery shall be subjected to a short circuit condition with a total external resistance of less than 0.1 ohm at $55 \pm 2^{\circ}\text{C}$. This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to $55 \pm 2^{\circ}\text{C}$.

Cells and batteries meet this requirement if their external temperature does not exceed 170°C and there is no disassembly, no rupture and no fire during the test and within six hours after the test.

T.6撞击/挤压

撞击 (适用于直径不小于 18毫米的圆柱形电池)

试样电池或元件电池放在平坦光滑的表面上, 一根 316型不锈钢棒横放在试样中心, 钢棒直径 $15.8\text{毫米} \pm 0.1\text{毫米}$, 长度至少 6厘米, 或电池最长端的尺度, 取二者之长者。将一块 $9.1\text{千克} \pm 0.1\text{千}$

克的重锤从 61 ± 2.5 厘米高处跌落到钢棒和试样交叉处, 使用一个几乎没有摩擦的、对落体重锤阻力最小的垂直轨道或管道加以控制。垂直轨道或管道用于引导落锤沿水平支撑表面呈 90 度落下。

接受撞击的试样, 纵轴应与平坦表面平行并与横放在试样中心的直径 15.8 ± 0.1 毫米弯曲表面的纵轴垂直。每一试样只经受一次撞击。

T.6 Impact / Crush

Impact (applicable to cylindrical cells greater than 18 mm in diameter)

The sample cell or component cell is to be placed on a flat smooth surface. A $15.8 \text{ mm} \pm 0.1 \text{ mm}$ diameter, at least 6 cm long, or the longest dimension of the cell, whichever is greater, Type 316 stainless steel bar is to be placed across the centre of the sample. A $9.1 \text{ kg} \pm 0.1 \text{ kg}$ mass is to be dropped from a height of $61 \pm 2.5 \text{ cm}$ at the intersection of the bar and sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. The vertical track or channel used to guide the falling mass shall be oriented 90 degrees from the horizontal supporting surface.

The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the $15.8 \text{ mm} \pm 0.1 \text{ mm}$ diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact.

挤压 (棱柱形、袋装、硬币/纽扣电池和直径小于 18 毫米的圆柱形电池)

将电池或元件电池放在两个平面之间挤压, 挤压力度逐渐加大, 在第一个接触点上的速度大约为 1.5 厘米每秒。挤压持续进行, 直到出现以下三种情况之一:

- (a) 施加的力量达到 $13 \text{ kN} \pm 0.78 \text{ kN}$;
- (b) 电池的电压下降至少 100 mV;
- (c) 电池变形达到原始厚度的 50% 或以上。

一旦达到最大压力、电压下降 100 mV 或更多, 或电池变形至少达原厚度的 50%, 即可解除压力。棱柱形或袋装电池应从最宽的一面施压。纽扣/硬币形电池应从其平坦表面施压。圆柱形电池应从与纵轴垂直的方向施压。

每个试样电池或元件电池只做一次挤压试验。试样应继续观察 6 小时。试验应使用之间未做过其他试验的电池或元件电池进行。

要求电池和电池组外壳温度不超过 170°C , 并且在试验过程中及试验后 6 小时内无解体, 无起火。

Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells not more than 18 mm in diameter)

A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5 cm/s at the first point of contact. The crushing is to be continued until the first of the applied three options below is reached.

- (a) The applied force reaches $13 \text{ kN} \pm 0.78 \text{ kN}$;
- (b) The voltage of the cell drops by at least 100 mV; or
- (c) The cell is deformed by 50% or more of its original thickness.

Once the maximum pressure has been obtained, the voltage drops by 100 mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released.

A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surfaces. For cylindrical cells, the crush force shall be applied perpendicular to the longitudinal axis.

Each test cell or component cell is to be subjected to one crush only. The test sample shall be observed for a further 6 h. The test shall be conducted using test cells or component cells that have not previously been subjected to other tests.

Cells and component cells meet this requirement if their external temperature does not exceed 170 °C and there is no disassembly and no fire during the test and within six hours after this test.

T.7 过度充电

充电电流必须是制造商建议的最大持续充电电流的两倍。试验的最小电压如下：

(a) 制造商建议的充电电压不大于 18V时，试验的最小电压应是电池组最大充电电压的两倍或 22V两者中的较小者；

(b) 制造商建议的充电电压大于 18V时，试验的最小电压应为最大充电电压的 1.2倍。

试验应在环境温度下进行，进行试验的时间应为 24小时。

要求充电电池组在试验过程中和试验后 7天内无解体，无起火。

T.7 Overcharge

The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test shall be as follows:

(a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.

(b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.

Tests are to be conducted at ambient temperature; the duration of the test shall be 24 hours.

Rechargeable batteries meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

T.8 强制放电

每个电池应在环境温度下与 12V直流电电源串联在起始电流等于制造商给定的最大放电电流的条件下强制放电。

将适当大小和额定值的电阻负荷与试验电池串联，计算得出给定的放电电流。对每个电池进行强制放电，放电时间应等于其额定容量除以初始试验电流。


要求原电池或充电电池在试验过程中和试验后 7天内无解体，无起火。

T.8 Forced discharge

Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer. The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere).

Primary or rechargeable cells meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

8.测试程序 TEST PROCEDURE

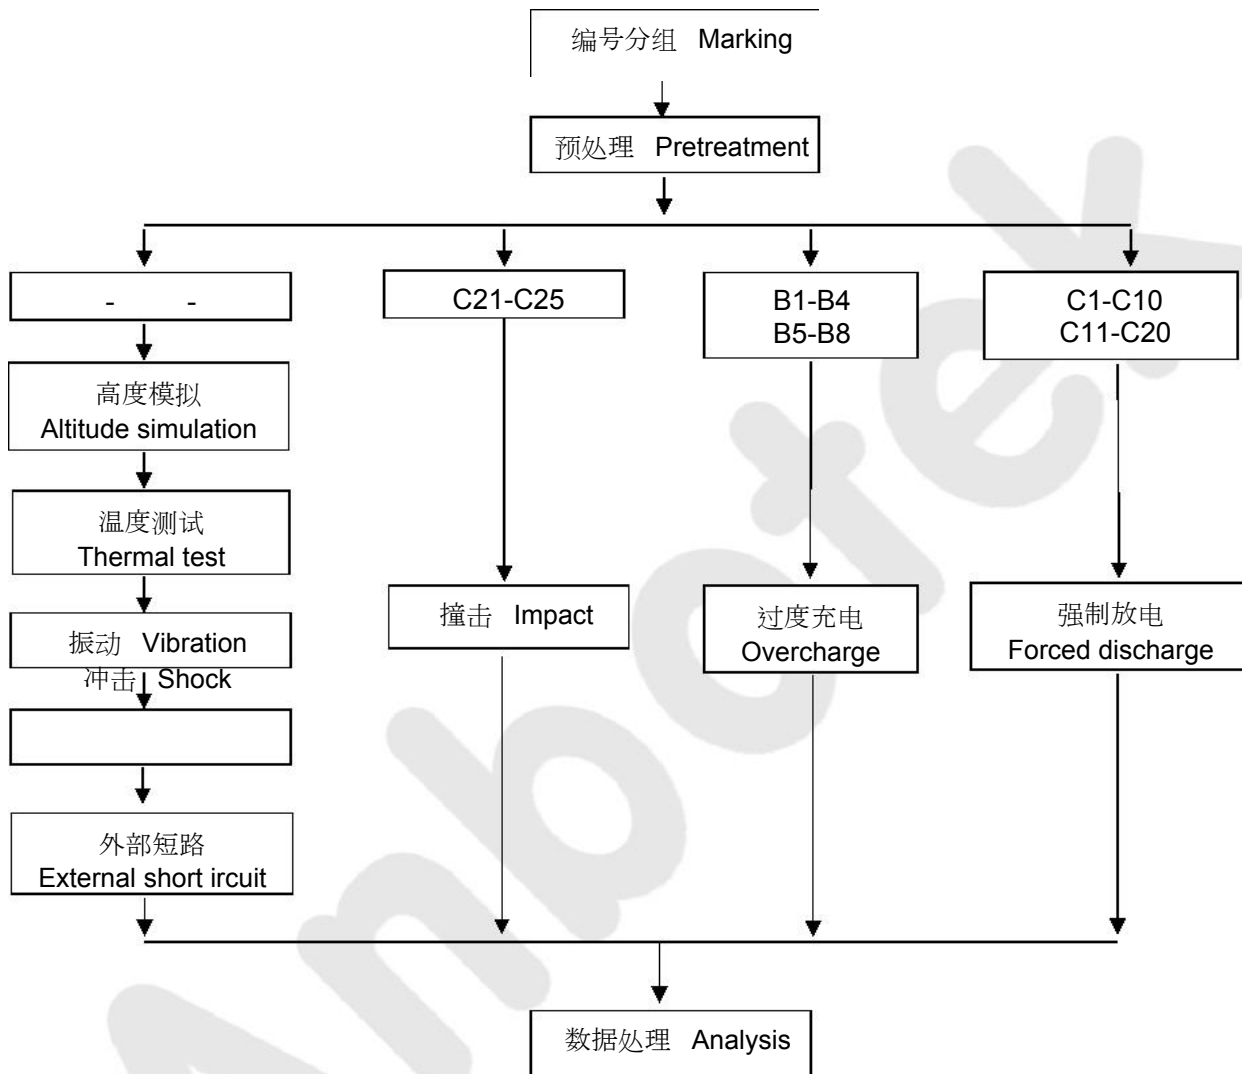

9.测试数据 DATA

T.1高度模拟(Altitude simulation)

电池 编号 No.	测试前	Pre-test	测试后	After test	质量亏损 Mass loss (%)	电压亏损 Voltage loss (%)	有无渗漏, 排气, 解体, 破裂和起火 (是/否) Whether leakage, venting, disassembly, rupture, fire (Y/N)
	质量 Mass 克(g)	电压 Voltage 伏(V)	质量 Mass 克(g)	电压 Voltage 伏(V)			
B1	612.627	14.282	612.627	14.282	0.000	0.000	N
B2	612.623	14.286	612.623	14.286	0.000	0.000	N
B3	612.619	14.290	612.619	14.290	0.000	0.000	N
B4	612.625	14.684	612.625	14.682	0.000	0.013	N
B5	612.627	14.282	612.627	14.282	0.000	0.000	N
B6	612.624	14.284	612.624	14.284	0.000	0.000	N
B7	612.622	14.288	612.622	14.288	0.000	0.000	N
B8	612.623	14.286	612.523	14.286	0.016	0.000	N

T.2温度测试(Thermal test)

电池 编号 No.	测试前	Pre-test	测试后	After test	质量亏损 Mass loss (%)	电压亏损 Voltage loss (%)	有无渗漏, 排气, 解体, 破裂和起火 (是/否) Whether leakage, venting, disassembly, rupture, fire (Y/N)
	质量 Mass 千克(kg)	电压 Voltage 伏(V)	质量 Mass 千克(kg)	电压 Voltage 伏(V)			
B1	612.627	14.282	612.111	14.272	0.084	0.070	N
B2	612.623	14.286	612.223	14.271	0.065	0.105	N
B3	612.619	14.290	612.400	14.279	0.036	0.077	N
B4	612.625	14.684	612.331	14.672	0.048	0.082	N
B5	612.627	14.282	612.211	14.270	0.068	0.084	N
B6	612.624	14.284	612.158	14.270	0.076	0.098	N
B7	612.622	14.288	612.000	14.275	0.102	0.091	N
B8	612.523	14.286	612.003	14.271	0.085	0.105	N

T.3振动(Vibration)

电池 编号 No.	测试前 Pre-test		测试后 After test		质量亏损 Mass loss (%)	电压亏损 Voltage loss (%)	有无渗漏, 排气, 解体, 破裂和起火 (是/否) Whether leakage, venting, disassembly, rupture, fire (Y/N)
	质量 Mass 克(g)	电压 Voltage 伏(V)	质量 Mass 克(g)	电压 Voltage 伏(V)			
B1	612.111	14.272	612.111	14.272	0.000	0.000	N
B2	612.223	14.271	612.223	14.271	0.000	0.000	N
B3	612.400	14.279	612.400	14.279	0.000	0.000	N
B4	612.331	14.672	612.100	14.670	0.038	0.014	N
B5	612.211	14.270	612.211	14.270	0.000	0.000	N
B6	612.158	14.270	612.158	14.270	0.000	0.000	N
B7	612.000	14.275	612.000	14.275	0.000	0.000	N
B8	612.003	14.271	611.500	14.271	0.082	0.000	N

T.4冲击(Shock)

电池 编号 No.	测试前 Pre-test		测试后 After test		质量亏损 Mass loss (%)	电压亏损 Voltage loss (%)	有无渗漏, 排气, 解体, 破裂和起火 (是/否) Whether leakage, venting, disassembly, rupture, fire (Y/N)
	质量 Mass 克(g)	电压 Voltage 伏(V)	质量 Mass 克(g)	电压 Voltage 伏(V)			
B1	612.111	14.272	612.111	14.272	0.000	0.000	N
B2	612.223	14.271	612.000	14.271	0.036	0.000	N
B3	612.400	14.279	612.400	14.279	0.000	0.000	N
B4	612.100	14.670	611.600	14.664	0.082	0.041	N
B5	612.211	14.270	612.211	14.270	0.000	0.000	N
B6	612.158	14.270	612.158	14.270	0.000	0.000	N
B7	612.000	14.275	612.000	14.275	0.000	0.000	N
B8	611.500	14.271	611.120	14.271	0.062	0.000	N



深圳安博检测股份有限公司
Shenzhen Anbotek Compliance
Laboratory Limited

报告编号: R012101187B
Report No.

第 13页,共 16页
Page of

T.5外部短路(External short circuit)

电池编号 No.	最高温度 Peak temperature (°C)	有无解体, 破裂, 起火 (是/否) Whether disassembly, rupture, fire (Y/N)
B1	59.4	N
B2	57.2	N
B3	56.8	N
B4	55.2	N
B5	58.3	N
B6	59.7	N
B7	56.5	N
B8	55.1	N

T.6撞击(Impact)

电池编号 No.	最高温度 Peak temperature (°C)	有无解体,起火 (是/否) Whether disassembly, fire (Y/N)
C21	88.5	N
C22	95.4	N
C23	100.5	N
C24	87.6	N
C25	98.7	N

T.7过度充电(Overcharge)

电池编号 No.	有无解体,起火 (是/否) Whether disassembly, fire (Y/N)
B1	N
B2	N
B3	N
B4	N
B5	N
B6	N
B7	N
B8	N

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东

Address: East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

电话(Tel): (86)755-26066061 传真(Fax): (86)755-26066021 网址(Website): www.anbotek.com



深圳安博检测股份有限公司
Shenzhen Anbotek Compliance
Laboratory Limited

报告编号: R012101187B
Report No.

第 14页,共 16页
Page of

T.8强制放电(Forced discharge)

电池编号 No.	有无解体,起火 (是/否) Whether disassembly, fire (Y/N)
C1	N
C2	N
C3	N
C4	N
C5	N
C6	N
C7	N
C8	N
C9	N
C10	N
C11	N
C12	N
C13	N
C14	N
C15	N
C16	N
C17	N
C18	N
C19	N
C20	N

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东

Adress: East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

电话(Tel): (86)755-26066061传真(Fax): (86)755-26066021网址(Website): www.anbotek.com

10.样品照片(Photos of the Sample)

电池(Battery)





深圳安博检测股份有限公司
Shenzhen Anbotek Compliance
Laboratory Limited

报告编号: R012101187B
Report No.

第 16页,共 16页
Page of

声明 (DECLARATION)

1. 测试参考文件:《联合国关于危险货物运输的建议书—试验和标准手册》
(ST/SG/AC.10/11/Rev.6/Amend.1&ST/SG/AC.10/11/Rev.6/Amend.1)

《United Nations Recommendations On The Transport Of Dangerous Goods, Manual Of Tests And Criteria》(ST/SG/AC.10/11/Rev.6/Amend.1&ST/SG/AC.10/11/Rev.6/Amend.1).

2. 测试实验室:深圳安博检测股份有限公司

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东

Test place Lab: Shenzhen Anbotek Compliance Laboratory Limited
East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang Street, Bao'an District,
Shenzhen, Guangdong, China

3. 本报告不能修改和删除。

This report shall not be revised and deleted.

4. 本报告出现的试验结果仅与试验样品有关。

The results only related to the items tested.

5. 本报告在未经深圳安博检测股份有限公司书面许可情况下不能用于宣传、广告之用。

This report shall not be published as advertisement without the approval of Shenzhen Anbotek Compliance Laboratory Limited.

6. 除非全部复制, 否则无深圳安博检测股份有限公司书面批准本报告不得部分复制。

This report shall not be copied partly without the written approval of Shenzhen Anbotek Compliance Laboratory Limited.

*****报告结束*****

End of report

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东

Address: East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

电话(Tel): (86)755-26066061 传真(Fax): (86)755-26066021 网址(Website): www.anbotek.com