


Technical Data



MULTI-OIL FG

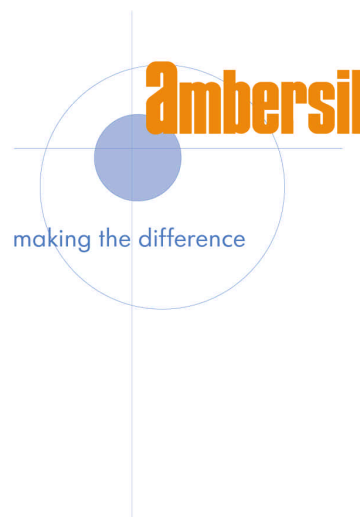

MULTI-OIL FG is a multi-purpose lubricating oil for the food industry. Based on highly refined medicinal oils and additives developed for hydraulic systems requiring ISO 32 viscosity or ISO 46 viscosity. Can also be used for general lubrication of bearings, slides and chains. Suitable for use as a light anti-corrosion coating.

Features

- NSF H1 Registered
- Wide operational temperature range
- Very low pour point for an easier start up after long periods of inactivity
- Good antifoam capacity
- Good deaeration properties
- Very good water demulsifying properties
- Effective inherent anti-corrosive properties
- Provides long lasting lubrication

Applications

- Used as an oleohydraulic fluid for both power and motion transfer.
- Lubrication of all mechanisms requiring a general, medium pressure lubricating oil.

Directions

- When used as hydraulic fluid: Follow the instructions of the machine manufacturer
- Do not mix with other products: It is important to purge and clean the system of the previous oil, before recharging
- As a lubricant, the product can be applied automatically, by dripping, spraying, wick or manual with an oiler
- To remove residues or excess product, use Ambersil Amberklene FG or Aquasafe FG

Technical Data

	Multi-Oil FG 32	Multi-Oil FG 46
NSF registration	: 142719 (H1)	142718 (H1)
Viscosity @ 40C	: 32mm ² /s	46mm ² /s
Viscosity index	: >105	>105
Flash Point	: > 170 °C	> 180 °C
Pour point (ASTM D 97)	: -21 °C	-21 °C
Copper Corrosion (3h/100°C)	: 1a	1a
Steel corrosion	: Pass	Pass
Demulsifying index (max.)	40/37/3 (30')	40/37/3 (30')
Packaging	: 4 x 5Ltr 1 x 20Ltr	4 x 5Ltr 1 x 20Ltr
NSF H1 Registered No.	: 142719	142718

STORAGE

The product may be stored at normal ambient temperatures and has a shelf life of not less than 36 months with correct storage. Aerosols should always be stored below 50°C, away from direct heat and naked flame.

HEALTH AND SAFETY

Health and Safety sheet available separately.

MISREPRESENTATION ACT 1967 TRADE DESCRIPTIONS ACT 1968

The information given in this publication is based on our experience and reports from customers. There are many factors outside our control and knowledge which affect the use and performance of our products and for which reason no warranty is given, express or implied. Users should make their own tests to determine the applicability of such information or the suitability of any products for their own particular purposes. Statements concerning the use of the products described herein are not to be construed as recommending the infringement of any patent and no liability for infringement arising out of any such use is to be assumed.

CRC Industries UK Ltd, Wylds Road, Bridgwater, Somerset, TA6 4DD, UK.

Tel: +44 (0) 1278 727200
Fax: +44 (0) 1278 425644

Web: www.ambersil.com
E-mail: sales.uk@crcind.com

February 2010