


FEATURES

- **Annealed Copper Conductor:** Provides superior conductivity and long-lasting performance
- **Polyvinyl Chloride Jacket:** Offers protection against environmental factors and mechanical stress
- **4 Cores:** Suitable for complex wiring needs
- **Temperature Range -15 °C to 70 °C:** Ensures performance in diverse environmental conditions
- **Voltage Rating 500 V:** Suitable for medium voltage applications
- **Plain Conductor Type:** Facilitates easy installation and connection
- **50/0.25 Core Strands:** Enhances flexibility and ease of handling
- **Black Jacket Colour:** Ideal for discrete installations

RS PRO 2.5 mm² Flexible Cable, 100 m

RS Stock No: 606-073

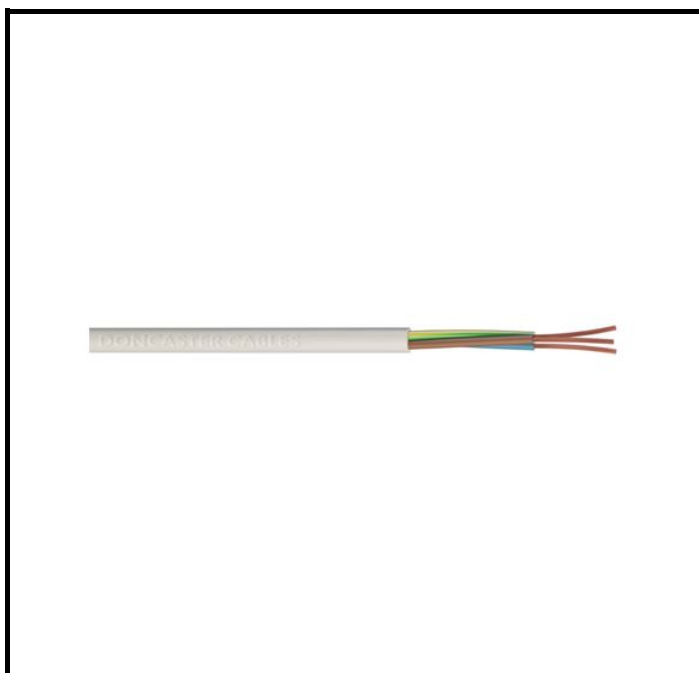

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

This RS PRO flexible cable is designed for reliable electrical connections in various industrial and commercial settings. With a conductor made from annealed copper, it ensures excellent conductivity and durability. The cable is suitable for installations requiring flexibility and robust performance.

General Specifications

Conductor Material	Annealed Copper
Conductor Type	Plain
Jacket Colour	Black
Product Type	Flexible Cable

Mechanical Specifications

Cable CSA	2.5 mm ²
Cable Length	100 m
Core Strands	50/0.25
Jacket Material	Polyvinyl Chloride
Number of Cores	4
Outside Diameter	12.5 mm

Operation Environment Specifications

Maximum Operating Temperature	70 °C
Minimum Operating Temperature	-15 °C

Approvals

Standards/Approvals	ACI, BASEC ISO 9001 UKAS CS1-029, BS EN 50363-3, BS EN 50363-4-1, BS EN 50525-2-11, BS EN 60228
---------------------	---

Electrical Specifications

Voltage	500 V
---------	-------