

DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Feed-through header, nominal cross section: 16 mm², color: green, nominal current: 76 A, rated voltage (III/2): 1000 V, contact surface: Ag, contact connection type: Pin, number of potentials: 3, number of rows: 1, number of positions: 3, number of connections: 3, product range: DFK-PC 6-16/..-GF-SH, pitch: 10.16 mm, mounting: Wave soldering, pin layout: Linear pinning, solder pin [P]: 4.1 mm, number of solder pins per potential: 3, plug-in system: COMBICON PC 16, Electrical properties: shielded, Pin connector pattern alignment: Standard, locking: Screw locking mechanism, mounting method: Threaded flange, type of packaging: packed in cardboard

Your advantages

- Well-known mounting principle allows worldwide use
- Flange system enables secure fixing to the housing panel by means of tool-free snap-in locking or screws
- Shroud for professional EMC shield feed-through on the inside of the device
- Screwable flange for superior mechanical stability

Commercial data

Item number	1701948
Packing unit	10 pc
Minimum order quantity	10 pc
Note	Made to order (non-returnable)
Sales key	AAE
Product key	AAEWEC
Catalog page	Page 576 (C-1-2013)
GTIN	4046356030854
Weight per piece (including packing)	27.55 g
Weight per piece (excluding packing)	21.405 g
Customs tariff number	85366990
Country of origin	PL

DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>

Technical data

Product properties

Product type	Feed-through header
Product family	DFK-PC 6-16/...-GF-SH
Product line	COMBICON Connectors XL
Type	Feed-through header
Number of positions	3
Pitch	10.16 mm
Number of connections	3
Number of rows	1
Number of potentials	3
Mounting flange	Threaded flange
Pin layout	Linear pinning
Solder pins per potential	3
Electrical characteristic	shielded

Electrical properties

Properties

Nominal current I_N	76 A
Nominal voltage U_N	1000 V
Rated voltage (III/3)	1000 V
Rated surge voltage (III/3)	8 kV
Rated voltage (III/2)	1000 V
Rated surge voltage (III/2)	8 kV
Rated voltage (II/2)	1000 V
Rated surge voltage (II/2)	6 kV
Electrical characteristic	shielded

Mounting

Mounting type	Wave soldering
Pin layout	Linear pinning

Material specifications

Material data - contact

Note	WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface characteristics	Selective coating
Metal surface contact area (top layer)	Silver (4 - 8 μm Ag)
Metal surface contact area (middle layer)	Nickel (2 - 4 μm Ni)
Metal surface soldering area (top layer)	Silver (4 - 8 μm Ag)
Metal surface soldering area (middle layer)	Nickel (2 - 4 μm Ni)

DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>

Material data - housing

Color (Housing)	green (6021)
Insulating material	PA
Insulating material group	I
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Glow wire flammability index GWFI according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

Notes

Notes on operation	In accordance with IEC 61984, COMBICON connectors have no switching power (COC). During designated use, they must not be plugged in or disconnected when carrying voltage or under load.
--------------------	--

Dimensions

Dimensional drawing	
Pitch	10.16 mm
Width [w]	65.84 mm
Height [h]	20.3 mm
Length [l]	34 mm
Installed height	19 mm
Solder pin length [P]	4.1 mm
Pin dimensions	1 x 1.2 mm

PCB design

Pin spacing	10.16 mm
Hole diameter	1.7 mm

Electrical tests

Air clearances and creepage distances |

Specification	IEC 60664-1:2007-04
Insulating material group	I
Comparative tracking index (IEC 60112)	CTI 600
Rated insulation voltage (III/3)	1000 V
Rated surge voltage (III/3)	8 kV
minimum clearance value - non-homogenous field (III/3)	8 mm
minimum creepage distance (III/3)	12.5 mm

DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>

Rated insulation voltage (III/2)	1000 V
Rated surge voltage (III/2)	8 kV
minimum clearance value - non-homogenous field (III/2)	8 mm
minimum creepage distance (III/2)	8 mm
Rated insulation voltage (II/2)	1000 V
Rated surge voltage (II/2)	6 kV
minimum clearance value - non-homogenous field (II/2)	5.5 mm
minimum creepage distance (II/2)	5.5 mm

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 100 °C (dependent on the derating curve)
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Relative humidity (storage/transport)	30 % ... 70 %
Ambient temperature (assembly)	-5 °C ... 100 °C


Packaging specifications

Type of packaging	packed in cardboard
-------------------	---------------------

Packaging specifications

Type of packaging	packed in cardboard
-------------------	---------------------

Dimensional drawing

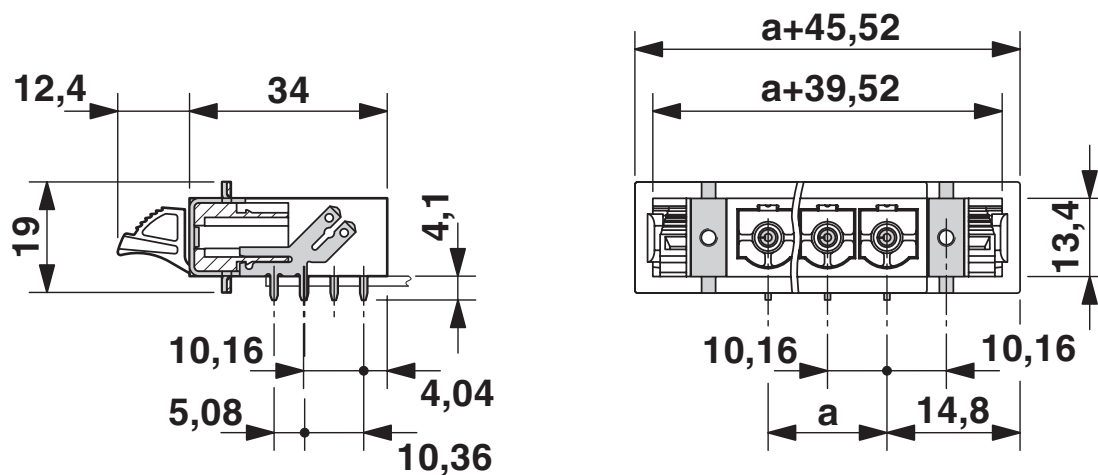


Technical drawing of a mechanical part, likely a shaft or a similar component, showing dimensions and a cross-section. The drawing includes the following dimensions and features:


- Overall Length:** 22,76
- Section A:** Indicated by a horizontal line with arrows at both ends, labeled "a".
- Vertical Dimensions (from top to bottom):**
 - 10,36
 - 4,04
 - 10,16
 - 5,08
- Horizontal Dimensions (from left to right):**
 - 10,16
 - 10,16
 - 1,7
- Features:**
 - A central section with a cross-section labeled "A".
 - A series of holes or slots along the length of the part.
 - A dashed line indicating a hidden feature or a break in the part.

1701948

<https://www.phoenixcontact.com/in/products/1701948>

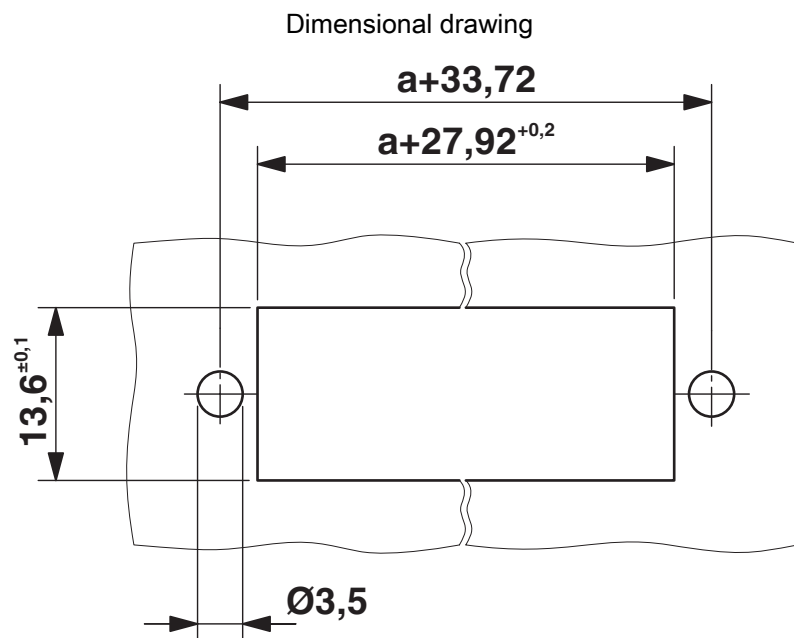

Sheet metal cutout for screw connection.

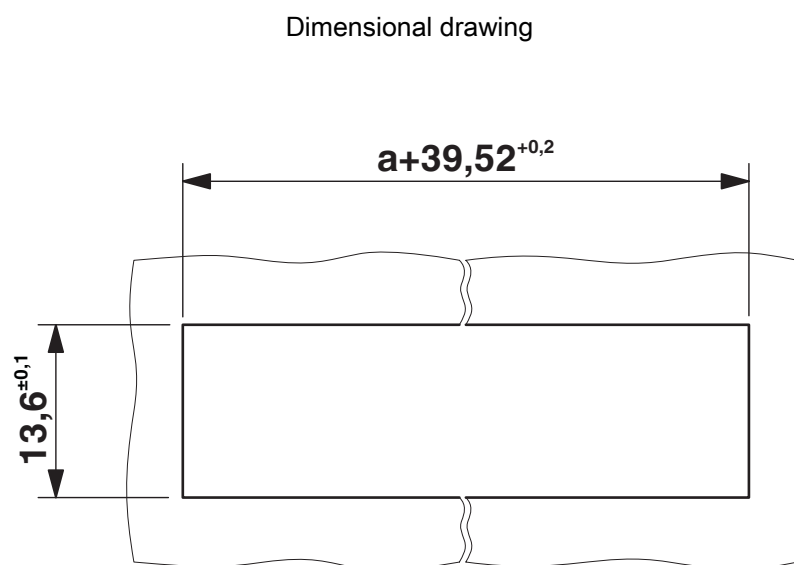

Sheet metal cutout for snap-on.

DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1701948>

 cULus Recognized Approval ID: E60425-20040202				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B	300 V	66 A	-	-
Use group C	300 V	66 A	-	-
Use group D	600 V	5 A	-	-

 VDE Zeichengenehmigung Approval ID: 40055586				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	1000 V	76 A	-	-

DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>

Classifications

ECLASS

ECLASS-11.0	27460201
ECLASS-12.0	27460201
ECLASS-13.0	27460201

ETIM

ETIM 9.0	EC002637
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%
EF3.0 Climate Change	
CO2e kg	0.402 kg CO2e

DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>


Accessories

CP-PC RD - Coding profile

1701967

<https://www.phoenixcontact.com/in/products/1701967>

Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red



DFK-PC MOUNT SET - Accessories

1054021

<https://www.phoenixcontact.com/in/products/1054021>

Contains 20 pcs. latch and screw elements for feed-through connectors each



DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>

C-SCF 2,5/6,3X0,8 - Connector

3240159

<https://www.phoenixcontact.com/in/products/3240159>



Slip-on sleeve, non-insulated, 1.5 ... 2.5 mm², 6.3 x 0.8

C-SCF 6/6,3X0,8 - Connector

3240160

<https://www.phoenixcontact.com/in/products/3240160>



Slip-on sleeve, non-insulated, 4 ... 6 mm², 6.3 x 0.8

DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>

C-SCF 1,5/6,3X0,8 - Connector

3240156

<https://www.phoenixcontact.com/in/products/3240156>



Slip-on sleeve, non-insulated, 0.5 ... 1.5 mm², 6.3 x 0.8

C-SCFI 6/6,3X0,8 - Connector

3240056

<https://www.phoenixcontact.com/in/products/3240056>



Slip-on sleeve, yellow, 4 ... 6 mm², 6.3 x 0.8

DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>

C-SCFI 1,5/6,3X0,8 - Connector

3240052

<https://www.phoenixcontact.com/in/products/3240052>



Slip-on sleeve, red, 0.5 ... 1.5 mm², 6.3 x 0.8

C-SCFFI 2,5/6,3X0,8 - Connector

3240547

<https://www.phoenixcontact.com/in/products/3240547>



Slip-on sleeve, fully isolated, blue, 1.5 ... 2.5 mm², for plug 6.3 x 0.8 mm

DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>

C-SCFI 2,5/6,3X0,8 - Connector

3240055

<https://www.phoenixcontact.com/in/products/3240055>



Slip-on sleeve, blue, 1.5 ... 2.5 mm², 6.3 x 0.8

C-SCFFI 6/6,3X0,8 - Connector

3240541

<https://www.phoenixcontact.com/in/products/3240541>



Slip-on sleeve, fully insulated, yellow, 4 ... 6 mm², for 6.3 x 0.8 mm plugs

DFK-PC 6-16/ 3-GF-SH-10,16 - Feed-through header



1701948

<https://www.phoenixcontact.com/in/products/1701948>

C-SCFFI 1,5/6,3X0,8 - Connector

3240538

<https://www.phoenixcontact.com/in/products/3240538>



Slip-on sleeve, fully isolated, red, 0.5 ... 1.5 mm², for plug 6.3 x 0.8 mm

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in