SIEMENS

Data sheet 8WH5104-2MF00

Terminal, combination connection, hybrid, 2x spring-I., 2x pl., 2.5 mm², gray



| Model | |
|---|--|
| product brand name | SENTRON |
| product designation | Terminal blocks |
| design of the product | hybrid through-type terminal |
| product variations | through-type terminal, for mounting on mounting rail acc. to IEC 60715 |
| design of terminal terminal levels internally linked | No |
| operating voltage rated value | 500 V |
| Protection class | |
| combustibility class according to UL 94 | V0 |
| Main circuit | |
| operational current rated value | 24 A |
| Appearance | |
| color | grey |
| Product details | |
| product component required end cover plate | Yes |
| Number | |
| number of terminal levels | 1 |
| number of terminal points per terminal level | 4 |
| Connections | |
| connectable conductor cross-section solid | |
| • minimum | 0.08 mm² |
| • maximum | 4 mm ² |
| connectable conductor cross-section finely stranded | |
| with core end processing minimum | 0.14 mm² |
| with core end processing maximum | 2.5 mm² |
| without core end processing minimum | 0.08 mm² |
| without core end processing maximum | 2.5 mm ² |
| type of connection 1 | spring-loaded terminal |
| type of connection 2 | spring-loaded terminal |
| position of the terminal | top |
| Mechanical Design | |
| height | 80.83 mm |
| height with lowest-profile installation | 36.5 mm |
| depth | 35.25 mm |
| length | 81 mm |
| fastening method | TH35 DIN rail |
| net weight | 10 g |
| material of the insulating body | Other |
| Environmental conditions | |
| ambient temperature during operation | |

• minimum

-60 °C 105 °C

maximum

Approvals Certificates

General Product Approval

Declaration of Conformity



Confirmation









other

Confirmation

Miscellaneous

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WH5104-2MF00

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/8WH5104-2MF00

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH5104-2MF00


CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

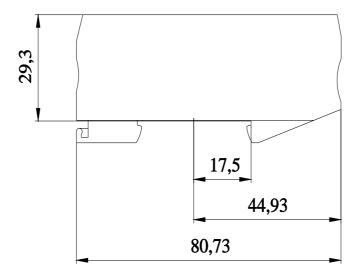

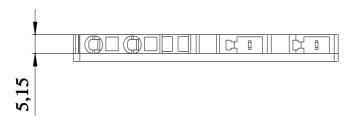

last modified: 7/19/2023 🗗