



Full technical details and distributor information can be found on our website [www.blindbolt.co.uk](http://www.blindbolt.co.uk)  
All dimensions are stated in millimetres unless noted otherwise.




Printing Date: July 2018

## Blind Bolt Product Specification Geomet 500B - Property Class 10.9

Product Code	Bolt Size	Box Qty	Hole Diameter	Fixing Thickness Min	Fixing Thickness Max	Anchor Clearance	Depth Clearance	Minimum Hole Centres
BB0850DTASM	M8 x 50	50	9	9	24	19	25	20
BB1060DTASM	M10 x 60	40	11	10	30	23	30	20
BB1095DTASM	M10 x 95	20	11	25	65	23	30	20
BB10130DTASM	M10 x 130	20	11	55	100	23	30	20
BB1270DTASM	M12 x 70	20	13	12	35	26	35	25
BB12120DTASM	M12 x 120	25	13	30	85	26	35	25
BB12180DTASM	M12 x 180	20	13	80	140	26	35	25
GBB1475DTASM	M14 x 75*	20	15	14	35	32	38	32
GBB14125DTASM	M14 x 125*	20	15	28	82	32	38	32
GBB14185DTASM	M14 x 185*	20	15	75	142	32	38	32
GBB1690DTASM	M16 x 90*	20	17	13	43	36	43	35
GBB16130DTASM	M16 x 130*	15	17	40	75	36	43	35
GBB16180DTASM	M16 x 180*	10	17	55	125	36	43	35
GBB20110DTASM	M20 x 110*	10	22	21	56	44	56	48
GBB20140DTASM	M20 x 140*	8	22	21	86	44	56	48
GBB20180DTASM	M20 x 180*	10	22	80	120	44	56	48
GBB20250DTASM	M20 x 250*	10	22	130	185	44	56	48
GBB24130DTASM	M24 x 130*	5	26	21	66	53	64	60
GBB30140DTASM	M30 x 140*	5	32	27	60	65	72	75



\* = We strongly recommend the use of our installation gauges when installing these bolts!

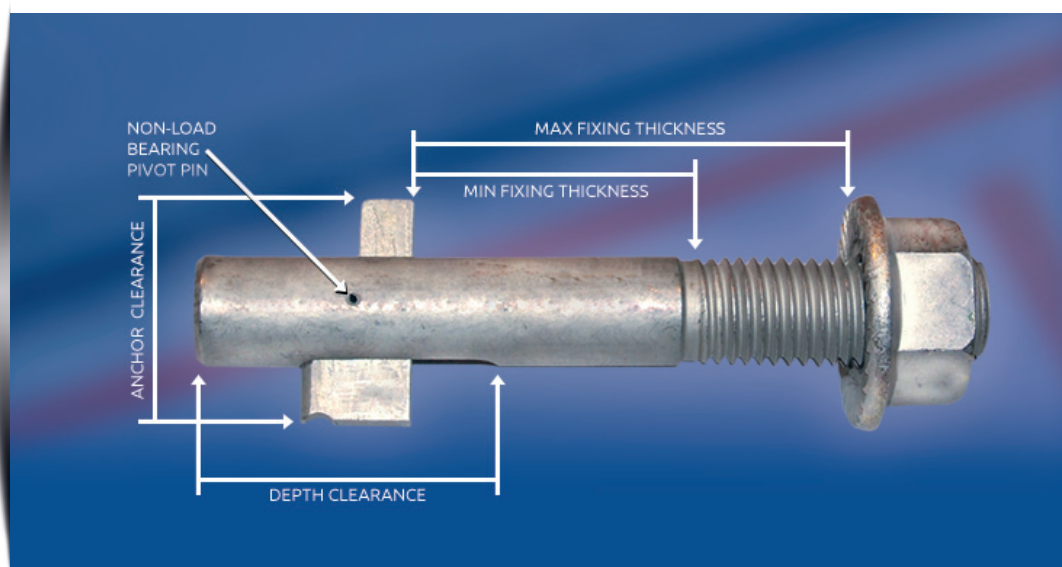



## High Tensile Geomet 500B Blind Bolt - Design to BS 5950-1

Diameter	Tension Capacity $P_t$ (kN)	Shear Capacity Over Thread $P_s$ , thread (kN)	Shear Capacity Over Slot $P_s$ , slot (kN)	Bearing Capacity in 10mm Plate		Recommended Tightening Torque (Nm)
				S275 $P_b$ (kN)	S355 $P_b$ (kN)	
M8	6.9	14.6	9.3	20.7	24.8	15
M10	12.9	23.2	15.9	27.6	33.0	24
M12	18.8	33.7	22.0	32.2	38.5	30
M14	TBC	TBC	TBC	TBC	TBC	TBC
M16	40.2	62.7	42.9	46.0	55.0	50
M20	57.9	97.9	63.4	55.2	66.0	65
M24	82.4	141.0	87.8	64.4	77.0	75
M30	123.5	224.0	137.2	80.5	96.3	85

These values are suitable for design to BS 5950-1 and can be used without further reduction for comparison to factored loads. Bearing resistances for different plate thicknesses can be calculated by scaling the values in proportion to the thickness, but should only be used where the distance from the centre line of the hole to the end of the plate is greater than 1.25d.

Combined tension and shear should satisfy the following equation:

$$\frac{F_s}{P_s} + \frac{F_t}{P_t} \leq 1.4$$

**Important Note:** The above tension resistances make no allowance for the deformation or yield of the connected parts. An appropriate design model for connections in hollow sections can be found in Joints in Steel Construction: Simple Connections

## High Tensile Geomet 500B Blind Bolt Design to BS EN 1993-1-8

Diameter	Tension Resistance $F_{t,Rd}$ (kN)	Shear Resistance Over Thread $F_{v,Rd}$ thread (kN)	Shear Resistance Over Slot $F_{v,Rd}$ slot (kN)
M8	6.9	14.6	11.1
M10	12.9	23.2	19.0
M12	18.8	33.7	26.3
M14	26.2	46.7	30.5
M16	40.1	62.7	51.5
M20	57.8	97.9	76.1
M24	82.3	141.0	105.4
M30	123.3	224.0	164.0

These are design values for use with BS EN 1993-1-8, and a partial safety factor of  $\gamma_{M2} = 1.25$  has already been applied. Bearing resistances should be calculated from BS EN 1993-1-8, Table 3.4, taking d as the nominal diameter of the bolt.

Combined tension and shear should satisfy the following equation:

$$\frac{F_{v,Ed}}{F_{v,Rd}} + \frac{F_{t,Ed}}{1.4F_{t,Rd}} \leq 1.0$$

**Important Note:** The above tension resistances make no allowance for the deformation or yield of the connected parts. An appropriate design model for connections in hollow sections can be found in Joints in Steel Construction: Simple Connections





Full technical details and distributor information can be found on our website [www.blindbolt.co.uk](http://www.blindbolt.co.uk)  
All dimensions are stated in millimetres unless noted otherwise.

Printing Date: July 2018




## Blind Bolt Product Specification Stainless Steel A4-70

Product Code	Bolt Size	Box Qty	Hole Diameter	Fixing Thickness Min	Fixing Thickness Max	Anchor Clearance	Depth Clearance	Minimum Hole Centres
BB0850A4ASM	M8 x 50	50	9	9	24	19	25	20
BB1060A4ASM	M10 x 60	40	11	10	30	23	30	20
BB1290A4ASM	M12 x 90	20	13	12	55	26	35	25
GBB16100A4ASM*	M16 x 100*	20	17	13	53	36	43	35



\* = We strongly recommend the use of our installation gauges when installing these bolts!

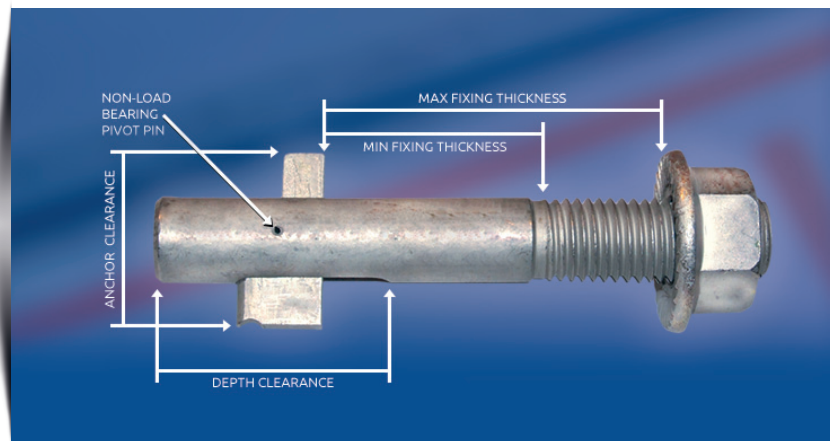



## Stainless Steel Blind Bolt Design to BS 5950

Diameter	Tension Capacity $P_t$ (kN)	Shear Capacity Over Thread $P_s$ , thread (kN)	Shear Capacity Over Slot $P_s$ , slot (kN)	Bearing Capacity in 10mm Plate		Recommended Tightening Torque (Nm)
				S275 $P_b$ (kN)	S355 $P_b$ (kN)	
M8	7.7	10.3	6.5	20.7	24.8	15
M10	14.3	16.2	11.1	27.6	33.0	22
M12	20.8	23.6	15.4	32.2	38.5	28
M16	43.5	44.0	30.1	46.0	55.0	45

These capacities are suitable for design to BS 5950-1 and can be compared directly with factored loads. Bearing resistances for different thicknesses can be calculated by scaling the values given in proportion to the thickness, but should only be used when the end distance is greater than 2d.

Bolts subject to combined tension and shear should satisfy the following expression:  $\frac{F_s}{P_s} + \frac{F_t}{P_t} \leq 1.4$

**Important Note:** The above tension resistances make no allowance for the deformation or yield of the connected parts. An appropriate design model for connections in hollow sections can be found in Joints in Steel Construction: Simple Connections

## Stainless Steel Blind Bolt Design to BS EN 1993-1-8

Diameter	Tension Capacity $F_{t,Rd}$ (kN)	Shear Resistance Over Thread $P_{V,Rd}$ thread (kN)	Shear Capacity Over Slot $F_{V,Rd}$ slot (kN)	Bearing Capacity in 10mm Plate	
				S275 $P_{bs}$ (kN)	S355 $P_{bs}$ (kN)
M8	7.7	12.3	7.8	65.6	75.2
M10	14.3	19.5	13.3	82.0	94.0
M12	20.8	28.3	18.5	98.4	112.8
M16	43.5	52.8	36.1	131.2	150.4

These design resistances are suitable for design to BS EN 1993 and can be compared directly with design loads. The quoted bearing resistances assume  $k_1 = 2.5$  and  $a_b = 1.0$ . For different arrangements the bearing resistance should be calculated using the expression in Table 3.4 of BS EN 1993-1-8, with d as the nominal diameter of the blind bolt.

Bolts subject to combined tension and shear should satisfy the following expression:  $\frac{F_{v,Ed}}{F_{v,Rd}} + \frac{F_{t,Ed}}{1.4F_{t,Rd}} \leq 1.0$

**Important Note:** The above tension resistances make no allowance for the deformation or yield of the connected parts. An appropriate design model for connections in hollow sections can be found in Joints in Steel Construction: Simple Connections