

1441211

https://www.phoenixcontact.com/gb/products/1441211

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail housing for use in distribution boards in accordance with DIN 43880, for mounting on a DIN rail, with transparent hinged cover, color: black (similar RAL 9005), width: 53.6 mm, height: 89.7 mm, depth: 60.7 mm, incl. 2 PCB terminal blocks, 10-pos., Push-in, for 1 mm², nominal current: 9 A, 200 V, PCB surface: 3900 mm²

Commercial data

Item number	1441211
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	ACHBAK
Product key	ACHBAK
GTIN	4063151856656
Weight per piece (including packing)	85.3 g
Weight per piece (excluding packing)	22.22 g
Customs tariff number	85369010
Country of origin	DE



1441211

https://www.phoenixcontact.com/gb/products/1441211

Set consists of

SPTA 1/10-5,0 - PCB terminal block

1752298

https://www.phoenixcontact.com/gb/products/1752298



Printed circuit board terminal, nominal current: 9 A, rated voltage (III/2): 320 V, nominal cross section: 1 mm², number of potentials: 10, number of rows: 1, number of positions per row: 10, product range: SPTA 1/, pitch: 5 mm, connection method: Push-in spring connection, mounting: Wave soldering, conductor/PCB connection direction: 65 °, color: green, Pin layout: Linear pinning, Solder pin [P]: 3.5 mm, number of solder pins per potential: 1, type of packaging: packed in cardboard



1441211

https://www.phoenixcontact.com/gb/products/1441211

Technical data

Notes

Assembly note	Please observe the assembly instructions available in the download area.
General	The PCB surface specification is for orientation purposes and is based on a basic PCB. The housing can also accommodate several PCBs.

Product properties

Product type	Stackable housing set
Housing type	DIN rail housing for use in distribution boards in accordance with DIN 43880
Housing series	BC
Number of positions	20
Max. number of positions	20 (pitch: 3.5 mm)
Туре	for mounting on a DIN rail, with transparent hinged cover
	incl. 2 PCB terminal blocks, 10-pos., Push-in, for 1 mm 2 , nominal current: 9 A, 200 V
Ventilation openings present	yes

Dimensions

Dimensional drawing	h w
Width	53.6 mm
Height	89.7 mm
Depth	60.7 mm
Depth from top edge of DIN rail	54.7 mm
Horizontal pitch	3 Div.
Dimensions	81.54 mm x 49 mm (PCB dimensions)
PCB design	
PCB thickness	1.4 mm 1.8 mm
laterial specifications	

M

Color (Lower housing part)	black (RAL 9005)
Color (Upper housing part)	light gray (RAL 7035)
Color (Housing cover)	transparent
Flammability rating according to UL 94	V0



1441211

https://www.phoenixcontact.com/gb/products/1441211

Packaging specifications

Type of packaging

Outer packaging type

Insulating material	Polycarbonat
Housing material	PC
□	
Environmental and real-life conditions	
Ambient conditions	
Max. IP code to attain	IP20
Ambient temperature (operation)	-40 °C 105 °C (depending on power dissipation)
Ambient temperature (storage/transport)	-40 °C 70 °C
Ambient temperature (assembly)	-5 °C 100 °C
Relative humidity (storage/transport)	95 %
PCB data	
PCB data	
Number of PCB holders	9
Type of PCB mount	Latching
Total PCB surface	3900 mm²
Thickness of the PCB	1.4 mm 1.8 mm
Mounting	
Mounting type	DIN rail mounting/panel mounting

packed in cardboard


Carton



1441211

https://www.phoenixcontact.com/gb/products/1441211

Drawings

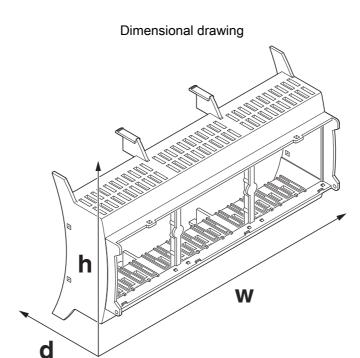

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.



1441211

https://www.phoenixcontact.com/gb/products/1441211

Classifications

ETIM 9.0

ECLASS

	ECLASS-13.0	27190301
ET	IM	

EC001031



1441211

https://www.phoenixcontact.com/gb/products/1441211

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Halesfield 13, Telford Shropshire, TF7 4PG 01952 681700 info@phoenixcontact.co.uk