

D200 Series

High Power 200W reed relay with 7kV isolation



- **200W switching power**
- **7kV Isolation across contacts**
- **Low Contact Resistance**
- **PCB Mount**
- **Excellent AC characteristics**

The D200 series combines a high power 200W switching capacity with isolation of 7kV across the contacts.

This switching performance is achieved through the use of high vacuum reed switches with Tungsten contacts and make these relays suitable for high reliability applications, such as test equipment and high voltage power supplies.

These are PCB Mount relays, though custom options may be available on request.

Contact Specification	Unit	Condition
Switch Action		SPNO
Contact Material		Tungsten
Isolation across contacts	kV DC or AC peak	7
Switching Power Max.	W resistive	200
Switching Voltage Max.	V DC or AC peak	2500
Switching Current Max.	A DC or AC peak	3
Carry Current Max.	A DC or AC peak	5
Capacitance across contacts	pF coil to screen grounded	0.8 typ
Lifetime operations	dry switching	10 ⁹
	50W switching	10 ⁶
Contact Resistance	mΩ max (typical)	600
Insulation Resistance	Ωmin (typical)	(10 ¹³)

Coil Specification		5V	12V	24V
Must Operate Voltage	V DC	3.75	9	20
Must Release Voltage	V DC	0.5	1.25	4
Operate Time	ms diode fitted	6.0	6.0	6.0
Release Time	ms diode fitted	1.0	1.0	1.0
Resistance	Ω	28	150	780

Note. The operate / release voltage and coil resistance will change at a rate of 0.4% per degree C. Values are stated at room temperature (20 degrees C)


Relay Specification		
Isolation contact/coil	kV	17
Insulation resistance contact to all terminals	Ωmin (typical)	10 ¹⁰ (10 ¹³)
Environmental		
Operating Temp range	°C	20 to +70

Standard Parts	Coil Voltage Vdc
DAT200-05	5
DAT200-12	12
DAT200-24	24


Please refer to this document for circuit design notes:-

<http://www.cynergy3.com/blog/application-notes-reed-relays-0>

Mechanical Dimensions

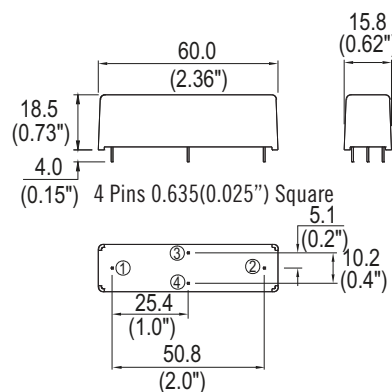

CIRCUIT DIAGRAM



Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969

Email: sales@cynergy3.com

ISO9001 CERTIFIED

D200 2018



www.cynergy3.com