

Voltage Derating Curve

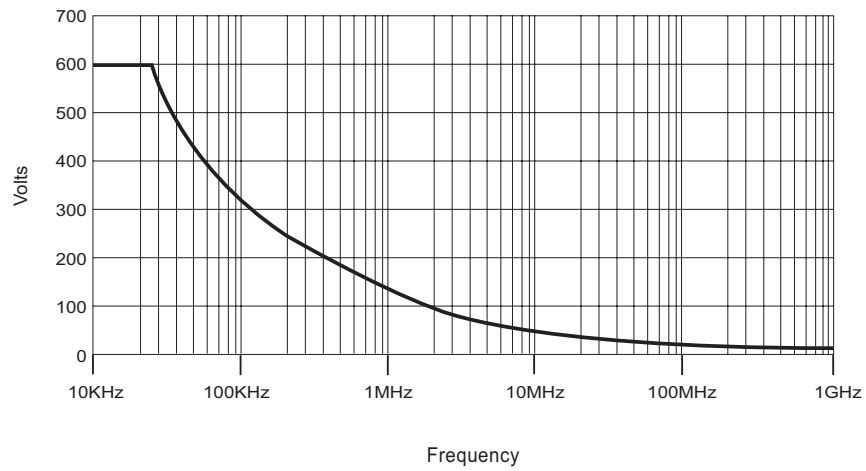


Fig.1

Oscilloscope Probe Kit Model. CP-2250



Made in Taiwan
Version:HF-D1101A



Introduction

The CP-2250 is a passive high impedance oscilloscope probe designed and calibrated for use with instruments having an input impedance of 1 M Ω shunted by 20pF. However, it may be compensated for use with instruments having an input capacitance of 10 to 30pF. The probe incorporates a three position slide switch in the head which selects attenuation of x1, x10 or a ground reference position.


Safety Instructions

Review the following safety precautions to avoid injury and prevent damage to this product or any products connected to it.

- To avoid potential hazards, use this product only as specified.
- The common terminal is at ground potential. Do not connect the common terminal to elevated voltages.
- Do not operate in an explosive atmosphere.
- Keep product surfaces clean and dry.
- If your probe requires cleaning, disconnect it from the instrument and clean it with mild detergent and water. Make sure the probe is completely dry before reconnecting it to the instrument.

Compensation Adjustment

The following adjustment is required whenever the probe is transferred from one oscilloscope or input channel to another. Connect the probe to the oscilloscope and select x10 position on the probe switch. Apply a 1KHz square wave to the probe tip, or connect to the cal socket on the oscilloscope to display a few cycles of the waveform and adjust the trimmer located in the BNC box for a flat topped square wave.

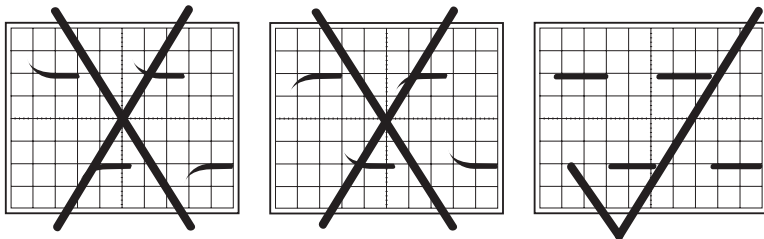

Specifications

Position X10

Attenuation Ratio	10:1
Bandwidth	DC to 250MHz
Rise Time	1.4nS
Input Resistance	10M Ω when used with oscilloscopes which have 1M Ω input.
Input Capacitance	Approx. 13pF
Compensation Range	10 to 30pF
Max. Input Voltage	600V CAT I, 300V CAT II (DC + peak AC) derating with frequency (see Fig.1)

Position REF

Probe tip opened, oscilloscope input grounded.

Position X1

Attenuation Ratio	1:1
Bandwidth	DC to 6MHz
Rise Time	58nS
Input Resistance	1M Ω (oscilloscope input resistance)
Input Capacitance	56pF plus oscilloscope capacitance
Max. Input Voltage	300V CAT I, 150V CAT II (DC + peak AC) derating with frequency

Operating Temperature	0 $^{\circ}$ C to 50 $^{\circ}$ C
Humidity	85% RH or less (at 35 $^{\circ}$ C)
Safety	Meets EN61010-031 CAT II
Cable Length	1.2 Meter

Accessories

Description

Channel Identifier Clip
Sprung Hook
Ground Lead
Insulating Tip
IC Tip
Adjusting Tool
Measuring Tip
Sprung Earth Tip
BNC Adapter

Part No.

PA-105
PA-106
PA-107
PA-108
PF-902
PF-903
PA-102
PF-905
PF-901