

Pin busbar, 16 mm² connection: 18x 1-phase according to UL 489, 480Y/277V for LS 5SJ4...-HG

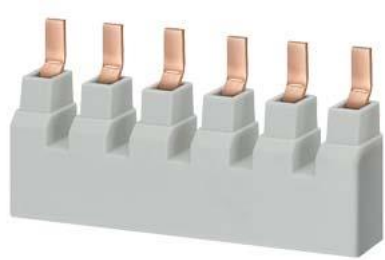


Figure similar

Model	
product brand name	SETRON
product designation	Pin busbar
General technical data	
compatibility	for 18 MCBs 1P
phase number	1
Main circuit	
operational current rated value	80 A
Suitability	
suitability for interaction devices with auxiliary switch	No
suitability for interaction devices with N conductor	No
suitability for use	for 18 MCBs 1P
Appearance	
color	light grey
Product details	
product feature insulated	Yes
product function	
• suitable for compact devices	No
• can be cut	No
Number	
number of devices suitable for fitting	18
Connections	
type of electrical connection	Pin
Mechanical Design	
module width	18 mm
width	15 mm
length	310 mm
number of modular width units	18
cross-section	16 mm ²
net weight	173 g
Approvals Certificates	
General Product Approval	other



[Miscellaneous](#)



[Confirmation](#)

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3663-2HG>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3663-2HG>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3663-2HG


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

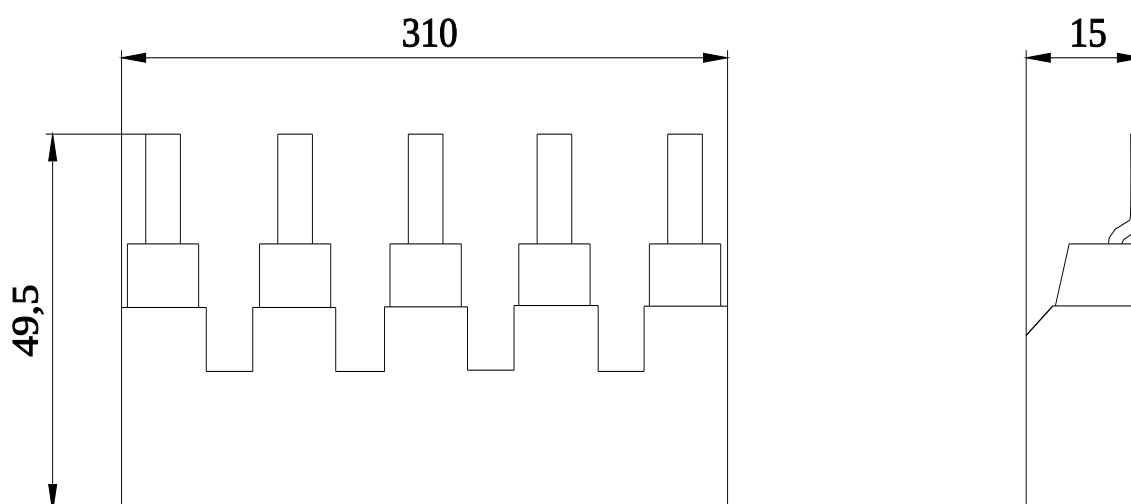



last modified:

5/30/2025 

