


## Features

- High Speed signal transmission
- Input TTL Compatible
- Hinged shutter to prevent contamination
- Nylon body

## RS PRO Optical Transmitter jack

RS Stock No.: 0458684

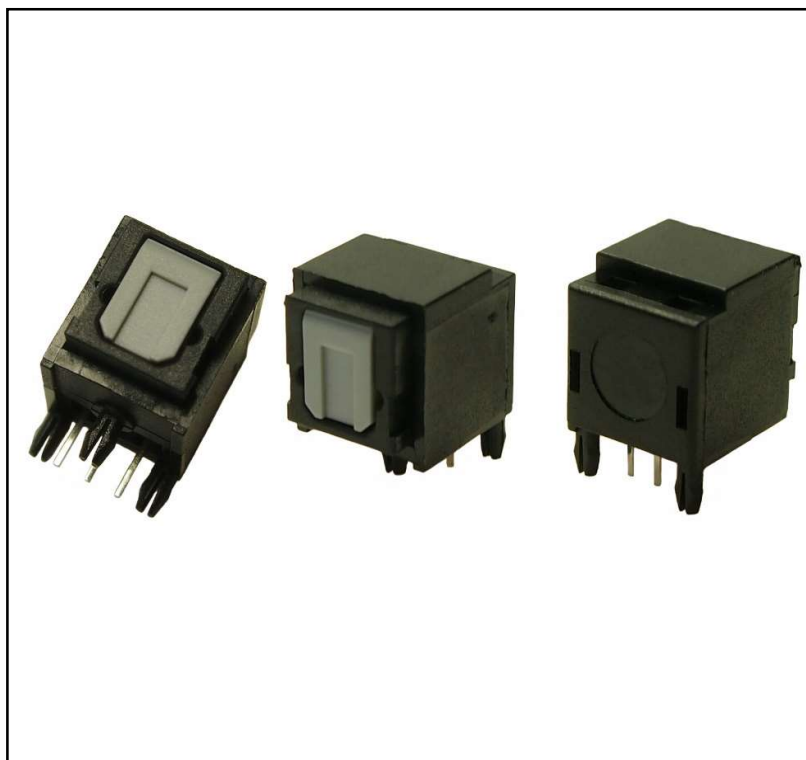

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

Buy this product from <https://uk.rs-online.com/>

This light transmitting unit is a standard-package product with connector and opto-electric component packaged with LED and drive IC. The function of unit changes the electric signal into light signal and be transmitted by plastic fiber.

The unit is operated at single +3V~ +5V and the input signal is TTL compatible. It has a maximum operating speed of 16Mbps. The light signal is coupled into plastic fiber by connector. The unit has high performance at low dissipation current, steady light output and efficient light coupling.

## Applications

Audio equipment, DVD player, TV, Digital optical data link, Sound card, set-top box

## Device Selection Guide

Chip IC Material	Chip LED $\lambda_p$ (nm)	Operating Voltage (Vcc)	Dissipation Current (mA)	Fibre Coupling Light Output (dBm)
Si	650	2.7~5.5	Typ. 4	Min -21 to Max -15

## Maximum Ratings (Ta = 25°C)

Supply Voltage	Vcc	-0.5 to 7 V
DC Input Voltage	Vin	-0.5 to Vcc +0.5 V
Power Dissipation	P	120 mW
Storage Temperature	Tstg	-30 to +80°C
Operating Temperature	Topr	-20 to +70°C
Soldering Temperature	Tsol	260°C
Soldering Time		≤ 5 sec / 2 times

## Electro-Optical Specification

Supply Voltage	Vcc	2.7 to 5.5 V
Operating voltage	Vcc	2.7 to 5.5 V
Peak Emission Wavelength	$\lambda_p$	640 to 670 nm
Transmission Speed		Max. 16 Mbps (NRZ signal)
Transmission Distance		0.2 to 20 m (Using APF)
Pulse Width Distortion	$\Delta tw$	-15 to 15 ns (16Mbps NRZ Signal)
Fibre Coupling Light Output	Pf	-21 to -15 dBm. See measuring method
Dissipation Current	Icc	Typical 4 to 10 max mA. See measuring method
High Level Input Voltage	V <sub>IH</sub>	2v min
Low Level Input Voltage	V <sub>IL</sub>	0.8v max
Rise Time	t <sub>r</sub>	Max 30ns

Fall Time	$t_f$	Max 30ns
Low to High propagation delay time	$t_{PLH}$	100ns max
High to Low propagation delay time	$t_{PLH}$	100ns max
Jitter	$\Delta t_j$	Typical 1.5ns to max 15ns

## Reliability Tests

Sample test size: 22 pcs, no failures

Item	Test Condition	Test Hours / Cycle
Soldering Heat	260°C $\pm$ 5°C	5 sec. / 2 times
High temp & Humidity storage	Ta=40°C, 90%RH	500
High storage temp.	Ta=80°C	500
Low storage temp.	Ta=-30°C	500
Temperature cycling	-30°C ~ 80°C (30min) (5min) (30min)	20
High temp operation life	Ta=60°C, Vcc=5V ON	500
Repeated operation	500 times	Coupling force < 2kg 0.4kg < detaching force < 2kg
Terminal strength (tension)	Weight: 500g, 30 sec each terminal	
Terminal strength (bending)	Weight: 500g, 2 times each terminal	
Mechanical Shock	Acceleration: 1000m/s <sup>2</sup> Pulse width: 6ms, 3 times / X, Y, Z direction	
Vibration	Frequency range: 10~55Hz / sweep 1 min Overall amplitude: 1.5mm 2H / X, Y, Z direction	

Icc (dissipation current): CURRENT ATTENUATE DIFFERENCE < 20%

Pf (fibre coupling light output): BRIGHTNESS ATTENUATION DIFFERENCE < 20%

TPLH (propagation L→H delay time): DELAY TIME DIFFERENCE < 20%

TPLH (propagation H→L delay time): DELAY TIME DIFFERENCE < 20%


Tr (rise time): TIME DIFFERENCE < 20%

Tf (fall time): TIME DIFFERENCE < 20%

## Approvals

Conforms to	EIAJ CP-1201 digital audio interface standard
Standards Met	RoHS

## Dimensions

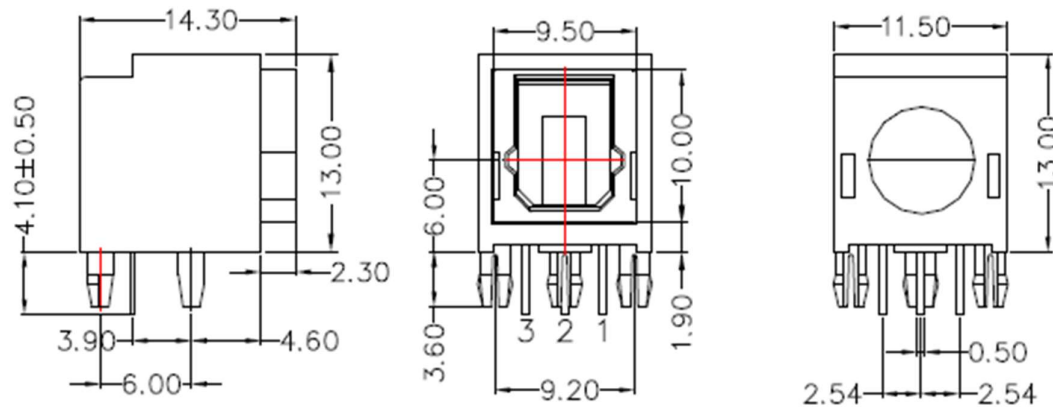


## Shutter Grey

**Notes:** 1.All dimensions are in millimeters.  
2.General Tolerance:  $\pm 0.2\text{mm}$

## Pin Function

1. GND 2. Vcc 3. Vin

## PCB Layout

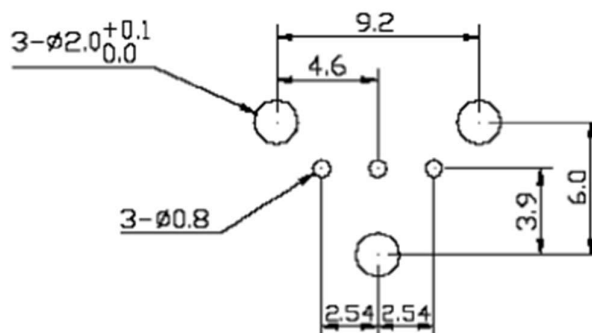


## Notes:

- Unit:mm
- Unspecified tolerance:  $\pm 0.3\text{mm}$
- Substrate Thickness:1.6mm

## Measuring Method

\*1 Measuring method of optical output coupling fiber

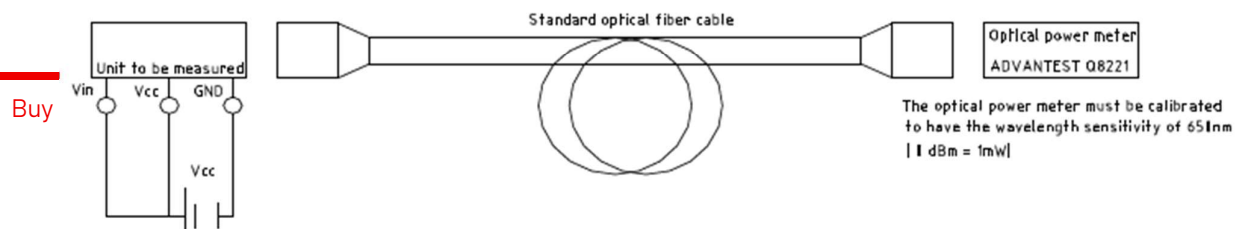

## Precautions for Using Method

1. Connect a by-pass capacitor (0.1uF) close to the optical jack within 7 mm of the unit lead frame.
2. Take proper electrostatic-discharge (ESD) precautions while handling these devices.  
These devices are sensitive to ESD.
4. Please follow the conditions described in the diagram below.

