


Bobbin
FS-2EFD-3009-20

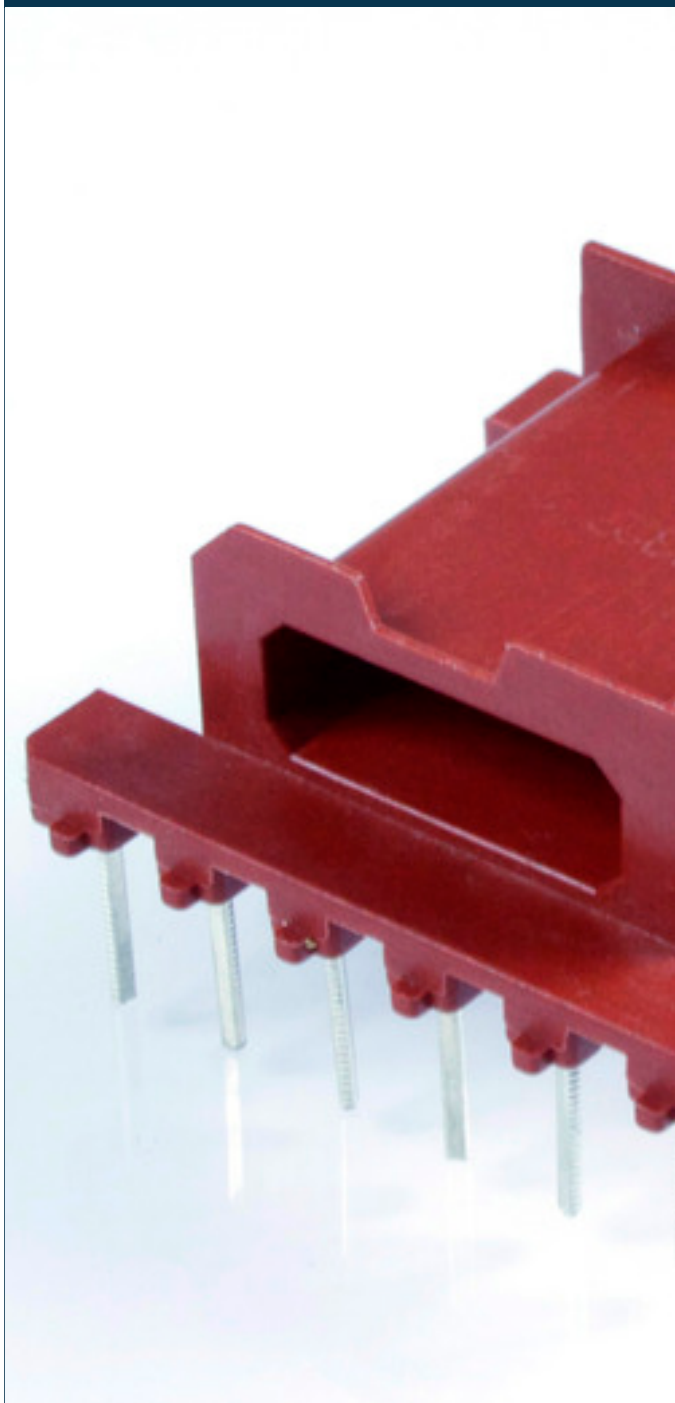

Advantages


Cost saving and easy compilation of components for pattern construction through unification

On request, wound inductors to EN61558-2-16 and EN60950 or vacuum potted

Applications

Transformers and reactors in switch mode power supplies

Approvals



Bobbin

FS-2EFD-3009-20

Electrical data		Type	FS-2EFD-3009-20	Type	FS-2EFD-3009-20
Electrical data	General data			Terminal and mounting	Yes
	for core	PM9820		Measures and weights	horizontal
	Environment	FS-2EFD-3009-00		Winding width	20.5 mm
	Notes	B		Winding high	2.8 mm
		ISO 2768-m			0.8
					3.5
					27.5
					5
					12

30 Mechanical data

Subjects to change.