
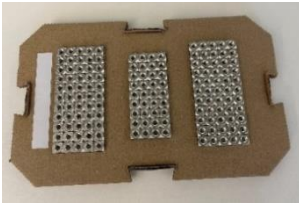

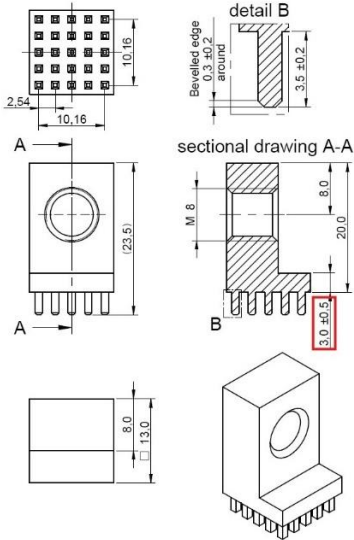
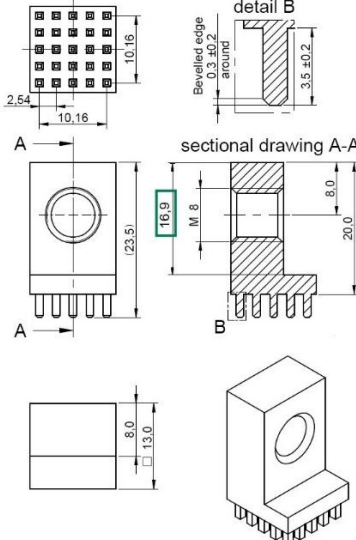




<b>Product/Process Change Notice (PCN)</b>		
<input type="checkbox"/> Major Change <input checked="" type="checkbox"/> Minor Change		
<b>PCN Number:</b> PCN_PeRAFU_20251222  <b>Affected Series:</b> WP-RAFU  <b>Affected Part Number:</b> see table "PART NUMBER, REVISION & DATASHEET"  <b>PCN Date:</b> 2025-09-22 (YYYY-MM-DD) <b>Effective Date:</b> 2025-12-22 (YYYY-MM-DD)	<b>Change Category:</b> <input type="checkbox"/> Equipment/Location <input checked="" type="checkbox"/> General Data <input type="checkbox"/> Material <input type="checkbox"/> Process <input type="checkbox"/> Product Design <input checked="" type="checkbox"/> Shipping/Packaging <input type="checkbox"/> Supplier <input type="checkbox"/> Software	
<b>Contact:</b> Product Management  <b>Phone:</b> +49 (0) 7942 - 945 5001  <b>Fax:</b> +49 (0) 7942 - 945 5179  <b>E-Mail:</b> pcn.eican@we-online.com	<b>Datasheet Change:</b> <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No  <b>Attachment:</b> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
<b>DESCRIPTION OF CHANGE:</b> <p>Due to an improvement of the production capability, Würth Elektronik eiSos will change the packaging from carton case to carton tray. The new carton will change the "single packaging quantity" (SPQ) and the "carton packaging quantity" (CPQ). The data sheet will be adjusted accordingly due to a technical, production dimension correction.</p> <p>There will be no change in form, fit, function, quality or reliability of the product.</p> <p>The new revision of the affected part numbers will be sent out after the previous revision is out of stock (according to FIFO - first-in, first-out).</p> <p>The preliminary datasheets of the affected part numbers will be available on the website after the PCN date.            Link to the website: <a href="#">WP-RAFU</a></p>		
<b>PART NUMBER, REVISION &amp; DATASHEET:</b>		
	<b>Part Number</b>	
	<b>Revision before change</b>	<b>Revision after change</b>
	7461068	<a href="#">001.003</a> <a href="#">001.004</a>
	7461114	<a href="#">001.003</a> <a href="#">001.004</a>
	7461115	<a href="#">001.003</a> <a href="#">001.004</a>

<b>DETAILS OF CHANGE:</b>																						
<ul style="list-style-type: none"> <li>Pictures &amp; dimensions</li> </ul>																						
<b>Before Change</b>	<b>After Change</b>																					
<b>Carton Case (SPQ)</b>	<b>Carton Tray (SPQ)</b>	<b>Shipping Carton (CPQ)</b>																				
																						
<b>Dimensions (LxWxH):</b>	<b>Dimensions (LxWxH):</b>	<b>Dimensions (LxWxH):</b>																				
108.0 x 85.0 x 65.0 mm	274.0 x 171.0 x 15.0 mm	300.0 x 200.0 x min. 115.0 mm Height varies depending on the component due to two-part carton.																				
<ul style="list-style-type: none"> <li>Datasheet</li> </ul>																						
<b>Before Change</b>	<b>After Change</b>																					
<b>General Information:</b>	<b>General Information:</b>																					
<table border="1"> <tr><td>Material</td><td>Brass</td></tr> <tr><td>Surface</td><td>Tin</td></tr> <tr><td>Execution</td><td>Press-Fit</td></tr> <tr><td>Operating Temperature</td><td>-55 up to +150 °C</td></tr> <tr style="border: 2px solid red;"><td>Packaging</td><td>Bulk</td></tr> </table>	Material	Brass	Surface	Tin	Execution	Press-Fit	Operating Temperature	-55 up to +150 °C	Packaging	Bulk	<table border="1"> <tr><td>Material</td><td>Brass</td></tr> <tr><td>Surface</td><td>Tin</td></tr> <tr><td>Execution</td><td>Press-Fit</td></tr> <tr><td>Operating Temperature</td><td>-55 up to +150 °C</td></tr> <tr style="border: 2px solid green;"><td>Packaging</td><td>Tray</td></tr> </table>		Material	Brass	Surface	Tin	Execution	Press-Fit	Operating Temperature	-55 up to +150 °C	Packaging	Tray
Material	Brass																					
Surface	Tin																					
Execution	Press-Fit																					
Operating Temperature	-55 up to +150 °C																					
Packaging	Bulk																					
Material	Brass																					
Surface	Tin																					
Execution	Press-Fit																					
Operating Temperature	-55 up to +150 °C																					
Packaging	Tray																					
<b>Before Change</b>	<b>After Change</b>																					
																						
<b>Production dimensioning:</b>	<b>Production dimensioning:</b>																					
3.0	16.9																					



- Quantity

Part Number	Before Change	After Change	
	SPQ: Carton Case	SPQ: Carton Tray	CPQ: Shipping Carton
7461068	81	93	279
7461114	81	93	279
7461115	81	93	279

**RELIABILITY / QUALIFICATION OF CHANGE:**

There will be no change of the product, therefore no additional reliability or qualification testing was performed.  
 The new packaging was checked by a drop test according to internal quality standards.