



Visual Signals AUTOMOTIVE

BEACONS




Automotive Xenon Beacons > X88 Series

Product overview

The X88 Series utilises a discharge capacitor and converter circuit to ignite xenon gas inside a tube, resulting in a brilliant flash of light. Xenon gas ignites virtually instantaneously so maximum brightness is obtained immediately. Xenons

have an added advantage of low current consumption combined with a reasonable life span. The X88 is available as either a permanent fixed unit or with a magnetic base and vehicle lighter socket lead for temporary and occasional use. This is ideal for when the beacon is not required to be fixed permanently to the roof of the vehicle.

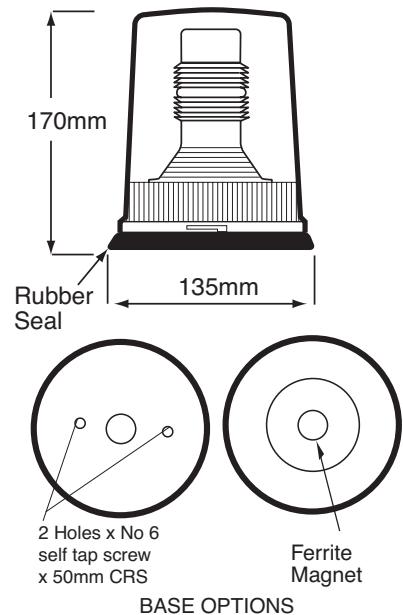

Features

Continuously rated

Choice of magnetic or fixed options

360° visibility

IP65

Material

UV Stable Polycarbonate Lens
Acetal Base with Neoprene Cover



Code No:	Voltage:	Light Source:	Current:
----------	----------	---------------	----------

XENON MB (Magnetic Base)

X88-72 • 12/24v Dc --- Xenon 10J/7.5J 1.40/0.7 A

XENON SF (Fixed Base)

X88-75 • 12/24v Dc --- Xenon 10J/7.5J 1.40/0.7 A

• Pre-set at 24v Dc ---

Kg 1.11 MB

Kg 0.67 SF

°C -25+66

IP 65

FPM 60x90

AUTOMOTIVE

APPROVAL AND CONFORMITIES



ADD THE FOLLOWING LENS CODES TO
THE PRODUCT CODE WHEN ORDERING

01

02

03

04

05