



Image may differ from product. See technical specification for details.

YEL 205-2RF/VL065

Insert bearing with an eccentric locking collar and extended inner ring

Insert bearings are based on sealed deep groove ball bearings. This variant is intended for use in applications where the direction of rotation is constant. It has an inner ring extended on both sides, with an eccentric locking collar, enabling quick and easy mounting onto the shaft.

- Quick and easy to mount onto the shaft
- Long service life
- Reduce noise and vibration levels

Overview

Dimensions

Shaft diameter	25 mm
Bore diameter	25 mm
Outside diameter	52 mm
Width, total	44.4 mm
Width, inner ring	34.9 mm
Width, outer ring	15 mm

Performance

Basic dynamic load rating	14 kN	
Basic static load rating	7.8 kN	
Limiting speed	4 300 r/min	
Note	Limiting speed with shaft tolerance h6	

Properties


Retaining feature, inner ring	Eccentric collar	
Bore type	Cylindrical	
Rolling elements	Balls	
Outer ring type	Spherical	
Inner ring extension	On both sides	
Cage	Non-metallic	
Rubber seating ring	Without	
Material, bearing	Bearing steel	
Coating	Zinc-coated inner ring bore and side faces	
Sealing	Seal and flinger on both sides	
Sealing type	Contact, multiple	
Lubricant	Grease	
Relubrication feature	With	

Logistics

Product net weight	0.236 kg
eClass code	23-05-08-02

UNSPSC code 31171536

Technical specification

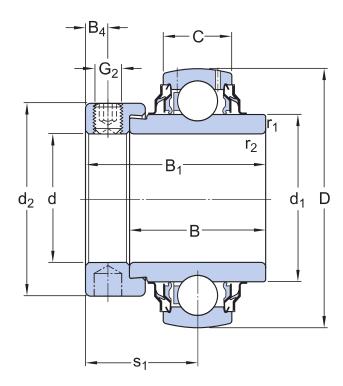

Dimensions

d	25 mm	Bore diameter
D	52 mm	Outside diameter
B ₁	44.4 mm	Overall bearing width
В	34.9 mm	Width of inner ring
С	15 mm	Width of outer ring
d_1	≈ 33.74 mm	Outside diameter of inner ring
d ₂	37.4 mm	Outside diameter of locking collar
B ₄	4.75 mm	Distance from side face to thread centre
r _{1,2}	min. 0.6 mm	Chamfer dimension of inner ring
s ₁	26.9 mm	Distance from locking device side face to raceway centre

Calculation data

Basic dynamic load rating	С	14 kN
Basic static load rating	C_0	7.8 kN
Fatigue load limit	P_{u}	0.335 kN

Limiting speed		4 300 r/min
		Limiting speed with shaft tolerance h6
Calculation factor	f ₀	14

Mounting information

Set screw	G ₂	M6x0.75
Hexagonal key size for set screw	N	3 mm
Recommended tightening torque for set screw		4 N·m

Associated products

Rubber seating ring RIS 205

Tolerances and clearances

GENERAL BEARING SPECIFICATIONS

- Tolerances: table 1, table 2
- Radial internal clearance: Standard inner ring, Other bearings

BEARING INTERFACES

• Shaft tolerances

Compatible products

Recommended product

Rubber seating ring for insert bearing

RIS 205

More Information

Product details	Engineering information	➢ Tools
Designs and variants		SKF Product select
Lubrication	Principles of rolling bearing selection	Bearing Frequency Calculator
General bearing specifications	General bearing knowledge	SimPro Quick
	Bearing selection process	
Loads	Bearing failure and how to prevent it	Heater selection tool
Temperature limits		
Permissible speed		
Design considerations	_	
Mounting and dismounting	-	
Designation system	-	



Terms of use

By accessing and using this website / app owned and published by AB SKF (publ.) ($556007-3495 \cdot Gothenburg$) ("SKF"), you agree to the following terms and conditions:

Warranty Disclaimer and Limitation of Liability

Although every care has been taken to assure the accuracy of the information on this website / app, SKF provides this information "AS IS" and DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. You acknowledge that your use of this website / app is at your sole risk, that you assume full responsibility for all costs associated with use of this website / app, and that SKF shall not be liable for any direct, incidental, consequential, or indirect damages of any kind arising out of your access to, or use of the information or software made available on this website / app.

Any warranties and representations in this website / app for SKF products or services that you purchase or use will be subject to the agreed upon terms and conditions in the contract for such product or service.

Further, for non-SKF websites / apps that are referenced in our website / app or where a hyperlink appears, SKF makes no warranties concerning the accuracy or reliability of the information in these websites / apps and assumes no responsibility for material created or published by third parties contained therein. In addition, SKF does not warrant that this website / app or these other linked websites / apps are free from viruses or other harmful elements.

Third Party Services

When viewing YouTube content via the SKF website(s) (i.e. using YouTube API Services), you agree to be bound by the YouTube Terms of Service.

Copyright

Copyright in this website / app copyright of the information and software made available on this website / app rest with SKF or its licensors. All rights are reserved. All licensed material will reference the licensor that has granted SKF the right to use the material. The information and software made available on this website / app may not be reproduced, duplicated, copied, transferred, distributed, stored, modified, downloaded or otherwise exploited for any commercial use without the prior written approval of SKF. However, it may be reproduced, stored and downloaded for use by individuals without prior written approval of SKF. Under no circumstances may this information or software be supplied to third parties.

This website /app includes certain images used under license from Shutterstock, Inc.

Trademarks and Patents

All trademarks, brand names, and corporate logos displayed on the website / app are the property of SKF or its licensors, and may not be used in any way without prior written approval by SKF. All licensed trademarks published on this website / app reference the licensor that has granted SKF the right to use the trademark. Access to this website / app does not grant to the user any license under any patents owned by or licensed to SKF.

Changes

SKF reserves the right to make changes or additions to this website / app at any time.