



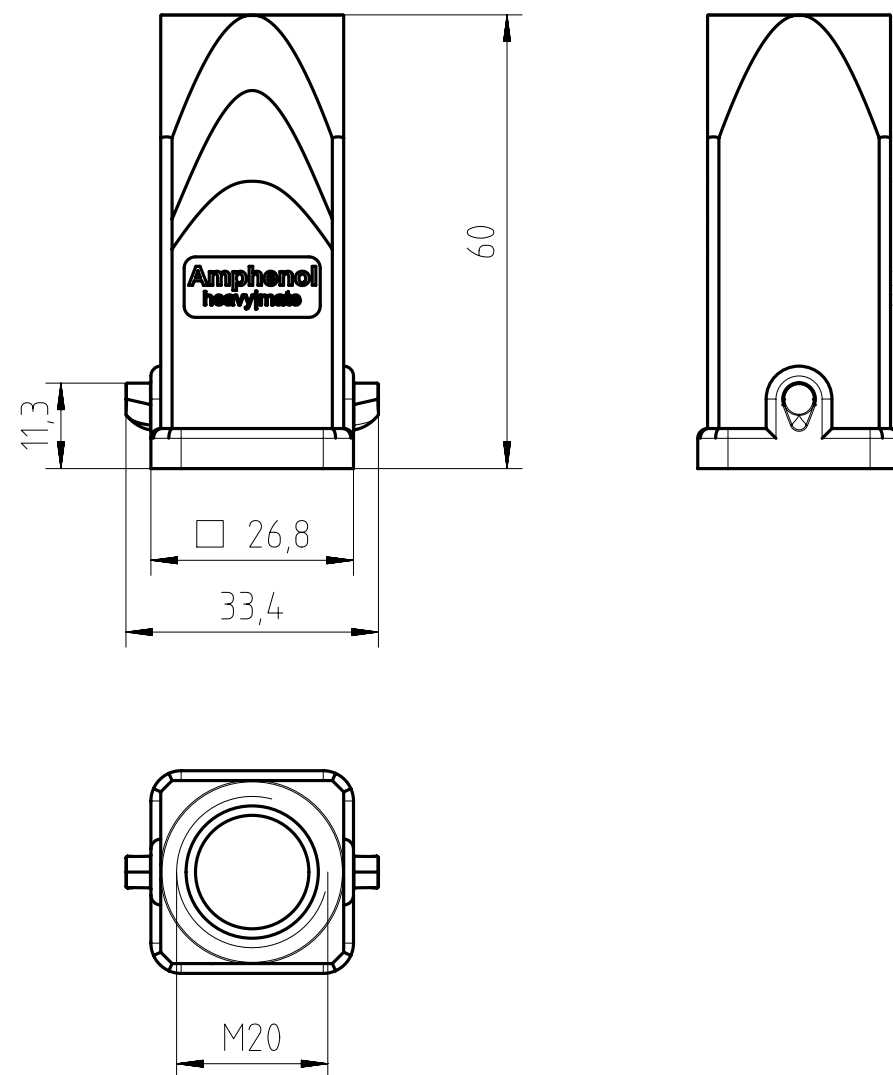

passend zu Gehäuseunterteile Kunststoff C146 10X003 XXX 4
fits to thermoplastic housings C146 10X003 XXX 4

Alle technischen Daten wurden unter Laborbedingungen ermittelt und können im Praxisbetrieb abweichen. Es handelt sich bei den Angaben weder um Beschaffenheits- noch um Haltbarkeitsgarantien. All technical data have been measured in a laboratory environment and can be different during practical usage of the product. Any product information is for descriptive usage only and not legally binding; particularly the information does not constitute or provide any legal guaranties ("Beschaffenheitsgarantie" or "Haltbarkeitsgarantie")

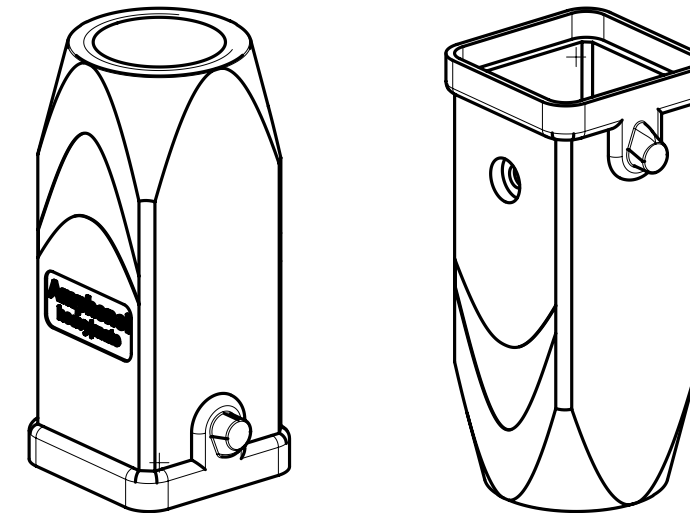

Characteristics

General Characteristics	Standard	Value
flammability	UL 94	V-0
Electrical Characteristics	Standard	Value
material group	IEC 60664-1	3b
Climatical Characteristics	Standard	Value
climatic category	IEC 60068-1	40 / 85 / 21
upper temperature	IEC 60512-11-9	+85 °C
lower temperature	IEC 60512-11-10	-40 °C
Mechanical Characteristics	Standard	Value
protection class in locked position	DIN EN 60 529	IP 65
Materials	Standard	Value
housing		PC-GF10
color		grey

Gewicht (errechnet) / Calc WT: ☒				g		Zul. Abw./Tolerances:		Maßstab / Scale: 1:1		A3									
☐ Prüfmaß / Testdimension						ISO 2768 m/K				CUSTOMER DRAWING									
Teileindex Partindexnumber ☒						2013		Datum/Date		Name		Tuellengehaeuse ☒ ood							
						Gez		10.07.		Holley									
						Drawn													
						Status: obsolete		Inspector: 03.06.2016 MBERT											
05		201500368		13.05.15		Wöl		Amphenol-Tuchel Electronics GmbH				M		C146 10R003 600 4				Blatt/Sheet	
04		201200774		13.03.14		Holley												1	
03		201200774		10.07.13		Holley												1 Bl.	
Index		Änderung/Description		Datum/Date		Name		Ers. f. / Replacement for: ☒ -C146 10R003 600 4 Rev02											