

VAL-MB-T2-750DC-2+V-R - Type 2 surge arrester



1376160

<https://www.phoenixcontact.com/in/products/1376160>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Surge protective device, acc. to type 2/class II, for grounded, unipolar DC supply systems up to 800 V DC, for DIN rail mounting, with remote indication contact.

Your advantages

- Safe operation of DC voltage supply systems thanks to reliable protection against surge voltages
- For use in grounded, unipolar DC supply systems
- Highly versatile with a maximum altitude up to 6000 m (abovesea level)
- Space-saving installation, thanks to the compact design
- Excellent level of information provided by mechanical/visual status indicator and remote indication contact

Commercial data

Item number	1376160
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	CL1
Product key	CL1391
GTIN	4063151740313
Weight per piece (including packing)	451 g
Weight per piece (excluding packing)	451 g
Customs tariff number	85359000
Country of origin	IN

VAL-MB-T2-750DC-2+V-R - Type 2 surge arrester



1376160

<https://www.phoenixcontact.com/in/products/1376160>

Technical data

Product properties

Product type	Surge arrester
IEC test classification	T2
EN type	T2
IEC power supply system	DC
Type	DIN rail module, one-piece
Surge protection fault message	Optical, remote indicator contact

Insulation characteristics

Overvoltage category	III
Pollution degree	2

Electrical properties

Indicator/remote signaling

Connection name	Remote fault indicator contact
Switching function	Changeover contact
Operating voltage	5 V AC ... 250 V AC (Altitude ≤ 2000 m (amsl)) 5 V DC ... 30 V DC (200 mA DC)
Operating current	5 mA AC ... 1.5 A AC 5 mA DC ... 1 A DC

Connection data

Connection method	Screw connection
Screw thread	M5
Tightening torque	3 Nm
Stripping length	16 mm
Conductor cross section flexible	2.5 mm² ... 35 mm²
Conductor cross section AWG	14 ... 2

Remote fault indicator contact

Connection method	Screw connection
Screw thread	M2
Tightening torque	0.25 Nm
Stripping length	7 mm
Conductor cross section flexible	0.14 mm² ... 1.5 mm²
Conductor cross section rigid	0.14 mm² ... 1.5 mm²
Conductor cross section AWG	28 ... 16

Dimensions

VAL-MB-T2-750DC-2+V-R - Type 2 surge arrester



1376160

<https://www.phoenixcontact.com/in/products/1376160>

Dimensional drawing	
Width	71.2 mm
Height	120 mm
Depth	65.5 mm (incl. DIN rail 7.5 mm)
Horizontal pitch	4 Div.

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V-0
CTI value of material	600
Insulating material	PA 6.6
	PBT
Housing material	PA 6.6

Protective circuit

Mode of protection	(DC+) - (DC-) (DC+/DC-) - PE
Direction of action	(L+)-PE & (L-)-PE & (L+)-(L-)
Nominal voltage U_N	750 V DC
Maximum continuous voltage U_C	800 V DC
Rated load current I_L	40 A
Residual current I_{PE}	$\leq 70 \mu A$ DC $\leq 500 \mu A$ AC
Standby power consumption P_C	≤ 70 mVA
Nominal discharge current I_n (8/20) μs	20 kA
Maximum discharge current I_{max} (8/20) μs	40 kA
Total discharge current I_{total} (8/20) μs	40 kA
Short-circuit current rating I_{SCCR}	min. 1 kA DC (with maximum backup fuse 40 A gG/1200 V DC) max. 4 kA DC (with maximum backup fuse 40 A gG/1200 V DC)
Voltage protection level U_p	≤ 3.3 kV
Residual voltage U_{res}	≤ 3.3 kV (at I_n) ≤ 2.5 kV (at 3 kA) ≤ 2.7 kV (at 6.25 kA) ≤ 2.9 kV (at 10 kA) ≤ 3.1 kV (at 15 kA) ≤ 4 kV (at 40 kA)
Response time t_A	≤ 25 ns
Max. backup fuse with branch wiring	40 A (gG / 1200 V DC)

Environmental and real-life conditions

Ambient conditions

VAL-MB-T2-750DC-2+V-R - Type 2 surge arrester



1376160

<https://www.phoenixcontact.com/in/products/1376160>

Degree of protection	IP20 (only when all terminal points are used)
Ambient temperature (operation)	-40 °C ... 80 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 6000 m (amsl)
Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	50g (Half-sine / 11 ms / 3x ±X, ±Y, ±Z)
Vibration (operation)	5g (5 - 500 Hz/2.5 h/X, Y, Z)

Standards and regulations

Standards/specifications	IEC 61643-31
Note	2018
Standards/specifications	EN 61643-31
Note	2019

Mounting

Mounting type	DIN rail: 35 mm
---------------	-----------------

VAL-MB-T2-750DC-2+V-R - Type 2 surge arrester




1376160


<https://www.phoenixcontact.com/in/products/1376160>

Drawings

Dimensional drawing

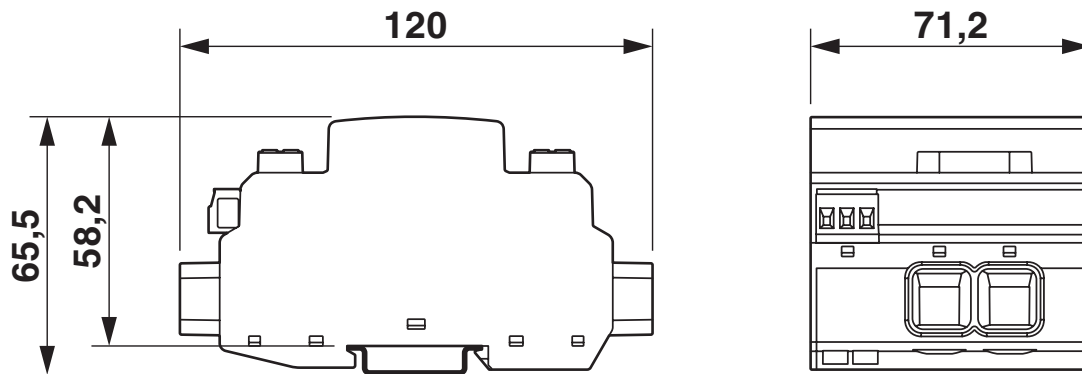

Circuit diagram

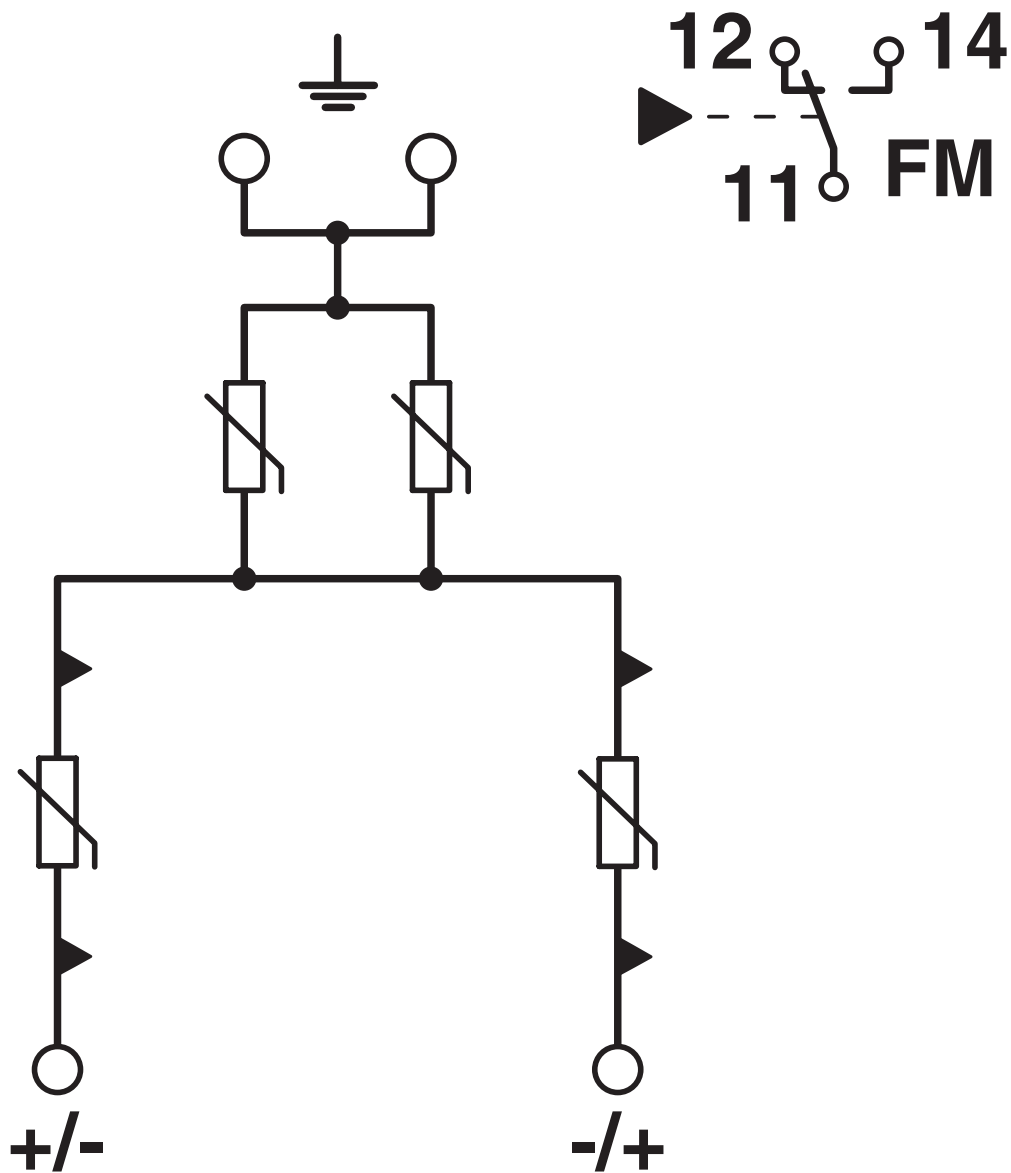

VAL-MB-T2-750DC-2+V-R - Type 2 surge arrester



1376160

<https://www.phoenixcontact.com/in/products/1376160>

Classifications

ECLASS

ECLASS-11.0	27130802
ECLASS-13.0	27171302

ETIM

ETIM 9.0	EC000941
----------	----------

VAL-MB-T2-750DC-2+V-R - Type 2 surge arrester



1376160

<https://www.phoenixcontact.com/in/products/1376160>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

VAL-MB-T2-750DC-2+V-R - Type 2 surge arrester



1376160

<https://www.phoenixcontact.com/in/products/1376160>

Accessories

X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/in/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

ATP-QTTCB - Partition plate

3206238

<https://www.phoenixcontact.com/in/products/3206238>



Partition plate, depth: 54 mm, width: 2 mm, height: 102 mm, color: gray

VAL-MB-T2-750DC-2+V-R - Type 2 surge arrester



1376160

<https://www.phoenixcontact.com/in/products/1376160>

SZK PZ2 VDE - Screwdriver

1206463

<https://www.phoenixcontact.com/in/products/1206463>



Screwdriver, PZ crosshead, VDE insulated, size: PZ 2 x 100 mm, 2-component grip, with non-slip grip

SZS 0,4X2,5 VDE - Screwdriver

1205037

<https://www.phoenixcontact.com/in/products/1205037>



Screwdriver, slot-headed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

info@phoenixcontact.co.in