

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 8-position, PUR halogen-free, black-gray RAL 7021, Plug angled M8, coding: A, on free cable end, cable length: 1.5 m, with black grip

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Save space – with high-pos. connectors

## Commercial data

Item number	1011699
Packing unit	1 pc
Minimum order quantity	100 pc
Note	Made to order (non-returnable)
Sales key	*****
Product key	AF1BGA
GTIN	4055626486901
Weight per piece (including packing)	54.5 g
Weight per piece (excluding packing)	54.5 g
Customs tariff number	85444290
Country of origin	PL

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

## Technical data

### Product properties

Product type	Sensor/actuator cable
Application	Standard
Number of positions	8
No. of cable outlets	1
Shielded	no
Coding	A

### Insulation characteristics

Degree of pollution	3
---------------------	---

### Material specifications

Flammability rating according to UL 94	HB
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated

### Electrical properties

Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage $U_N$	30 V AC
	30 V DC
Nominal current $I_N$	1.5 A

### Mechanical properties

#### Mechanical data

Insertion/withdrawal cycles	$\geq 100$
-----------------------------	------------

### Signaling

Status display	no
Status display present	No

### Connector

#### Connection 1

Type	Plug angled M8
Coding type	A

#### Connection 2

Type	free cable end
------	----------------


### Cable/line

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

Cable length	1.5 m
PUR halogen-free black [PUR]	
Dimensional drawing	
Cable weight	31.4 kg/km
UL AWM Style	20549
Number of positions	8
Shielded	no
Cable type	PUR halogen-free black [PUR]
Conductor structure signal line	18x 0.10 mm
AWG signal line	26
Conductor cross section	8x 0.14 mm <sup>2</sup> (Signal line)
Wire diameter incl. insulation	1 mm ±0.02 mm (Signal line)
External cable diameter	5.10 mm ±0.15 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material, filler	PE
Material wire insulation	PP
Single wire, color	white, brown, green, yellow, gray, pink, blue, red
Thickness, insulation	≥ 0.21 mm (Signal line) ≥ 0.38 mm (Outer cable sheath)
Overall twist	8 wires around filler to the core
Length of twist, overall twist	58 mm
Max. conductor resistance	139 Ω/km (at 20 °C)
Insulation resistance	1 GΩ*km (at 20 °C)
Nominal voltage, cable	≤ 300 V AC
Test voltage	≥ 3000 V AC (Spark test)
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Smallest bending radius, fixed installation	25.5 mm
Smallest bending radius, movable installation	51 mm
Dynamic load capacity (bending)	Max. bending cycles: 4000000, Bending radius: 51 mm, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s <sup>2</sup>
Halogen-free	in accordance with DIN VDE 0472 part 815 in accordance with DIN EN 50267-2-1
Flame resistance	according to UL 758/1581 (horizontal)

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

	in accordance with UL 758/1581 FT2
Resistance to oil	According to DIN EN 60811-2-1, 168 h at 100°C
Other resistance	hydrolysis and microbe resistant
	Resistant to salt water
	Low adhesion
	abrasion-resistant
	partly UV-resistant (in accordance with DIN EN ISO 4892-2-A)
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation)
	-25 °C ... 80 °C (Cable, flexible installation)

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)


## Standards and regulations

### M8

Standard designation	M8 connector
Standards/specifications	IEC 61076-2-104


## Drawings

Schematic diagram

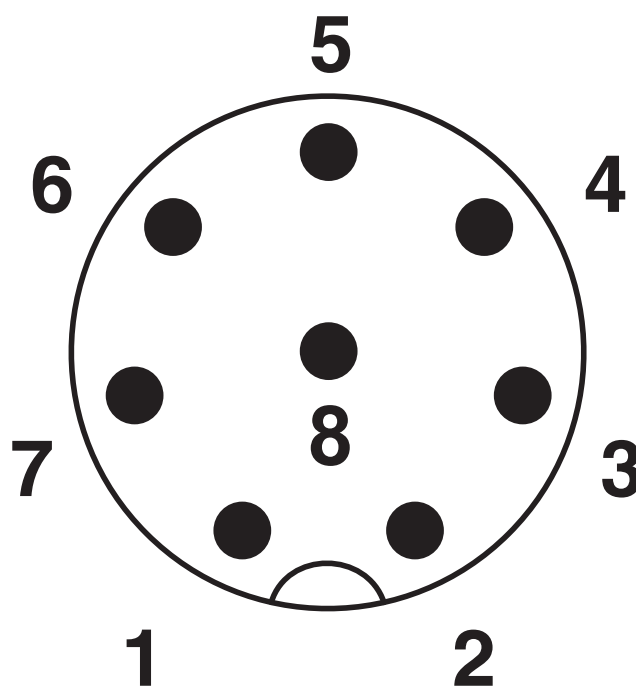

M8 plug pin assignment, 8-pos., view of pin side

Circuit diagram

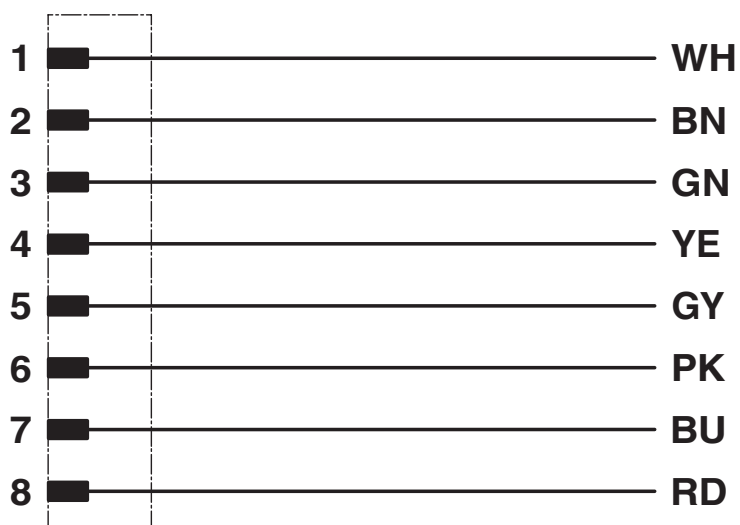

Contact assignment of the M8 plug


# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable

1011699

<https://www.phoenixcontact.com/in/products/1011699>



Dimensional drawing

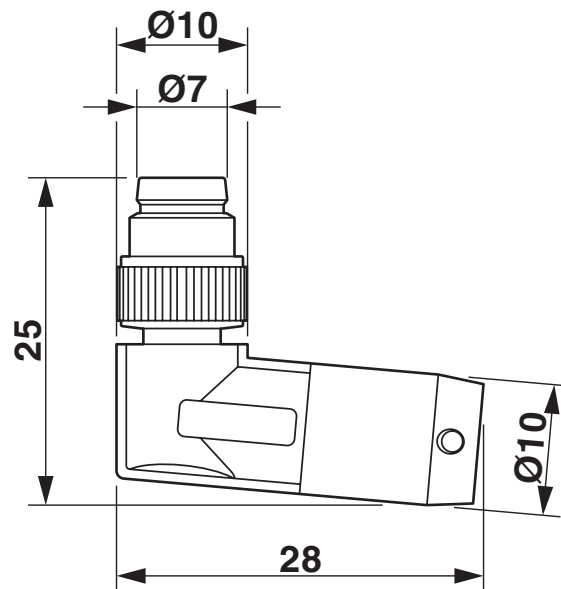

M8 x 1 male plug, angled version

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1011699>



### UL Listed

Approval ID: FILE E 221474

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	30 V	1.5 A	-	-



### cUL Listed

Approval ID: FILE E 221474

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	30 V	1.5 A	-	-

### cULus Listed

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

## Classifications

### ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

### ETIM

ETIM 9.0	EC001855
----------	----------

### UNSPSC

UNSPSC 21.0	26121600
-------------	----------



Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

## Accessories

### PROT-M 8 FS-PA-CHAIN - Sealing cap

1430857

<https://www.phoenixcontact.com/in/products/1430857>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 plugs



### UCT-WMT (23X4) - Conductor marker

0801453

<https://www.phoenixcontact.com/in/products/0801453>



Conductor marker, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: insert, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 30, text field height: 4 mm, text field width: 23 mm

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

## UC-WMT (23X4) - Conductor marker

0819411

<https://www.phoenixcontact.com/in/products/0819411>



Conductor marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: insert, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 24, text field height: 4 mm, text field width: 23 mm

---

## US-WMT (23X4) - Cable marker

0828769

<https://www.phoenixcontact.com/in/products/0828769>



Cable marker, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 56, text field height: 4 mm, text field width: 23 mm

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

## WMTW (23X4)R - Cable marker

0831004

<https://www.phoenixcontact.com/in/products/0831004>



Cable marker, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMaster 300/600, THERMOMARK X1.2, mounting type: insert, cable diameter range: 1.5 ... 35 mm, Number of individual labels: 3000, text field height: 4 mm, text field width: 23 mm

---

## WP-CTA POM 13,0 BK - Protective hose adapter

1422884

<https://www.phoenixcontact.com/in/products/1422884>



Protective hose adapter, for corrugated hoses with a nominal size of 13 (10 x 13), corrugated in parallel

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

## WP-PA HF 13,0 BK - Protective hose

3240681

<https://www.phoenixcontact.com/in/products/3240681>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: V0, inside diameter: 10 mm, Total length: 50 m

---

## WP-PA HF-HB 13,0 BK - Protective hose

3240839

<https://www.phoenixcontact.com/in/products/3240839>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: HB, inside diameter: 10 mm, Total length: 50 m

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

## TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/in/products/1208487>



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

---

## SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/in/products/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/in/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

## CUTFOX-S VDE - Diagonal cutter

1212207

<https://www.phoenixcontact.com/in/products/1212207>



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

## WIREFOX SAC-1 - Stripping tool

1212757

<https://www.phoenixcontact.com/in/products/1212757>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 3.2 to 4.4 mm, any stripping length

---

## WIREFOX SAC - Stripping tool

1212623

<https://www.phoenixcontact.com/in/products/1212623>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length



# SAC-8P-M 8MR/ 1,5-PUR BK - Sensor/actuator cable



1011699

<https://www.phoenixcontact.com/in/products/1011699>

## WIREFOX 10 - Stripping tool

1212150

<https://www.phoenixcontact.com/in/products/1212150>



Stripping tool, for cables and conductors from 0.02 - 10 mm<sup>2</sup>, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm<sup>2</sup> stranded/1.5 mm<sup>2</sup> solid, replaceable stripping blade

---

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)