
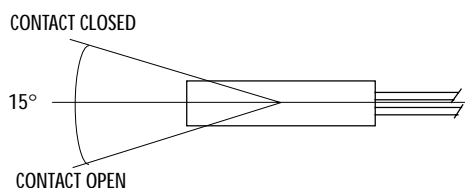


Comus Group of Companies

PRODUCT DATA SHEET

Manufactured in the UK

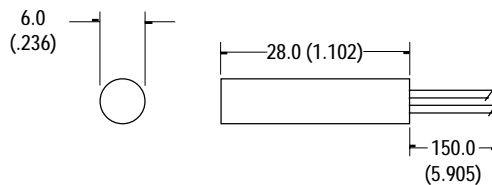

SPECIFICATION

| | | |
|-----------------------|--------------|---|
| CONTACT FORM / STYLE | | - |
| SWITCHING VOLTAGE | Max. Vac RMS | 60 Vac/dc |
| SWITCHING CURRENT | Max. A | 0.1 |
| SWITCHING CAPACITY | Max. VA | 3 |
| DIFFERENTIAL ANGLE | Deg.° Max. | 15° |
| CONTACT RESISTANCE | Max. Ω | 100 |
| OPERATING TEMPERATURE | Deg. °C | -37° +100° |
| STORAGE TEMPERATURE | Deg. °C | -40° +125° |
| CASE MATERIAL | | Polypropylene |
| CABLE / TERMINATION | | 2 x round 0.14 ² PVC covered and insulated |

This product is fully sealed to give maximum mechanical protection and minimise the ingress of dust and moisture. As a guide, the product is expected to meet the requirements of IP65.

TILT SWITCH MODULE - Mercury Free

PART NUMBER
CW60S/15

| Rev. No. | Revision Note | Date | Signature |
|----------|---------------|--------|-----------|
| B | Web Site 2000 | 1-5-00 | RG |

The Comus Group of Companies consist of:
 Assemtech Europe Limited
 E. Bachem GmbH
 Comus International
 W. Gunther GmbH
 Gunther Belgium
 Gunther France
 S.T.G.

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.