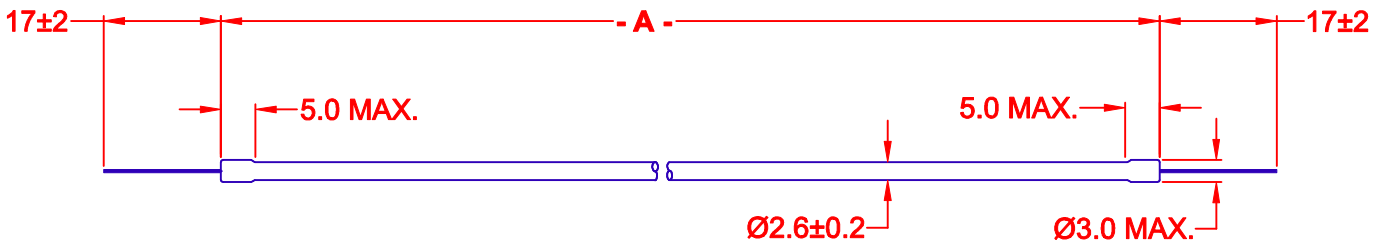

JKL PART NUMBER	-A- LENGTH	LCD HIGH OUTPUT WHITE RGB COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS)
BF26188-20B	188±3.0	5,400°k x = .336 y = .353	1115 @ 0°C	405	5 ± 1	30,000 TYP.	35,000 AVG.
BF26214-20B	214±2.0		1150 @ 0°C	460			
BF26285-20B	285±2.0		1525 @ 0°C	610			
BF26318-20B	318±1.5		1710 @ 0°C	685			
BF26360-20B	360±1.5		1940 @ 0°C	775			

NOTES:
* RATED LIFE IS DEFINED AS THE POINT WHICH INTENSITY BECOMES 50% OF THE INITIAL RATING.

RATING AT 25°C UNLESS OTHERWISE SPECIFIED.

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
A	ELECTRICAL CHNG. & ADD BF26318 & BF26360	10/20/04
	RELEASED TO CAD MULTI LIST	8/14/03

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/-
2 PL +/- REF.
ANGLE +/- REF.

DRAWN BY L. WENGSTROM
APPV'D BY J.K. DATE 10/20/04

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

JKL COMPONENTS CORPORATION

TITLE
MINIATURE COLD CATHODE FLUORESCENT LAMP

SIZE A | FSCM NO. 55335 | DRAWING NO. BF 26-20B

SCALE NONE | RELEASED DATE 8/14/03 | REVISION DATE 10/20/04 | REV. NO. A | SHEET 1 OF 1