



The 10 A Switch Actuators are modular installation devices in proM design for installation in the distribution board on 35 mm mounting rails.

The connection to the ABB i-bus® EIB / KNX is implemented via a Bus Connection Terminal.

The device does not require an additional power supply.

The actuators switch up to 12 independent electrical loads via potential free contacts.

The outputs are connected using screw terminals with combination drive head screws. Each output is controlled separately via the EIB / KNX.

The switch actuators can be manually operated via an operating element which simultaneously indicates the switch status. The actuators are particularly suitable for switching ohmic loads, inductive and capacitive loads as well as fluorescent lamp loads (AX) according to EN 60669.

Technical data

| | | | | | | |
|--|---|--|---|--------------------------------------|-------------------------|---------------------------|
| Power supply | <ul style="list-style-type: none"> – Operating voltage – Current consumption EIB / KNX – Power consumption EIB / KNX | 21...30 V DC, made available by the bus | < 12 mA | Max. 250 mW | | |
| Output nominal values | <ul style="list-style-type: none"> – SA/S - type – Number of contacts (potential free) – U_n rated voltage – I_n rated current – Power loss per device at max. load | 2.10.1 4.10.1 8.10.1 12.10.1 | 2 4 8 12 | 250 / 440 V AC (50/60 Hz) | 10 AX 10 AX 10 AX 10 AX | 1.5 W 2.5 W 4.5 W 6.5 W |
| Output switching currents | <ul style="list-style-type: none"> – AC3 operation (cosφ = 0.45) EN 60 947-4-1 – AC1 operation (cosφ = 0.8) EN 60 947-4-1 – Fluorescent lighting load AX to EN 60669-1 – Minimum switching performance – DC current switching capacity (ohmic load) | 8 A / 230 V | 10 A / 230 V | 10 AX / 250 V (140 μF) ²⁾ | 100 mA / 12 V | 100 mA / 24 V |
| Output life expectancy | <ul style="list-style-type: none"> – Mechanical endurance – Electrical endurance to IEC 60 947-4-1 – AC1 (240 V/cosφ = 0.8) – AC3 (240 V/cosφ = 0.45) – AC5a (240 V/cosφ = 0.45) | > 3 x 10 ⁶ | > 10 ⁵ | > 3 x 10 ⁴ | > 3 x 10 ⁴ | Operations (state change) |
| Output switching times¹⁾ | <ul style="list-style-type: none"> – Max. number of relay position changes per output and minute, if all relays are switched simultaneously. The position changes should be distributed equally within the minute. – Max. number of relay position changes per output, and minute if only one relay is switched | 2.10.1 4.10.1 8.10.1 12.10.1 | 60 | 30 | 15 | 10 |
| Connections | <ul style="list-style-type: none"> – EIB / KNX – Load current circuits – cable shoe – Tightening torque | Bus Connection Terminal, 0.8 mm Ø, single core | Screw terminal with universal head (PZ 1) 0.2...4 mm ² finely stranded, 2x (0.2 – 2.5 mm ²) 0.2...6 mm ² single core, 2x (0.2 – 4 mm ²) | contact pin minimum 10 mm | Max. 0.8 Nm | |
| Operating and display elements | <ul style="list-style-type: none"> – Red LED and EIB / KNX push button – Contact position indication | for assignment of the physical address | Relay lever | | | |
| Housing | – IP 20 | to EN 60 529 | | | | |
| Safety class | – II | to EN 61 140 | | | | |
| Isolation category | <ul style="list-style-type: none"> – Overvoltage category – Pollution degree | III to EN 60 664-1 | 2 to EN 60 664-1 | | | |

¹⁾ The specifications apply only after the bus voltage has been applied to the device for at least 30 seconds. The typical elementary delay of the relay is approx. 20 ms

²⁾ The maximum inrush-current peak (see table 2) may not be exceeded.

Table 1 – Part 1: 10 A Switch Actuator SA/S x.10.1, technical data

| | | | | |
|-------------------------------|--|-----------------------------------|--------|----------------|
| EIB / KNX voltage | – SELV 24 V DC (safety extra low voltage) | | | |
| Temperature range | – Operation | – 5 °C ... + 45 °C | | |
| | – Storage | – 25 °C ... + 55 °C | | |
| | – Transport | – 25 °C ... + 70 °C | | |
| Environment conditions | – humidity | max. 93 %, without bedewing | | |
| Design | – Modular DIN-Rail Component (MDRC) | Modular installation device, ProM | | |
| | – SA/S - type | 2.10.1 | 4.10.1 | 8.10.1 12.10.1 |
| | – Dimensions (H x W x D) | 90 x W x 64 | | |
| | – Width W in mm | 36 | 72 | 144 216 |
| | – Mounting width (modules at 18 mm) | 2 | 4 | 8 12 |
| | – Mounting depth in mm | 64 | 64 | 64 64 |
| Weight | – In kg | 0.15 | 0.25 | 0.46 0.65 |
| Installation | – On 35 mm mounting rail | EN 60 715 | | |
| Mounting position | – As required | | | |
| Housing, colour | – Plastic housing, grey | | | |
| Approvals | – EIB / KNX nach EN 50 090-2-2 | Certification | | |
| CE mark | – In accordance with the EMC guideline and low voltage guideline | | | |

Table 1 – Part 2: 10 A Switch Actuator SA/S x.10.1, technical data

Lamp loads, at 230 V AC

| | | |
|---|--|--------|
| Lamps | – Incandescent lamp load | 2500 W |
| Fluorescent lamp T5 / T8 | – Uncompensated luminaire | 2500 W |
| | – Parallel compensated | 1500 W |
| | – DUO circuit | 1500 W |
| Low-volt halogen lamps | – Inductive transformer | 1200 W |
| | – Electronic transformer | 1500 W |
| | – Halogen lamp 230 V | 2500 W |
| Dulux lamp | – Uncompensated luminaire | 1100 W |
| | – Parallel compensated | 1100 W |
| Mercury-vapour lamp | – Uncompensated luminaire | 2000 W |
| | – Parallel compensated | 2000 W |
| Switching performance (switching contact) | – Max. peak inrush-current I_p (150 μ s) | 400 A |
| | – Max. peak inrush-current I_p (250 μ s) | 320 A |
| | – Max. peak inrush-current I_p (600 μ s) | 200 A |
| Number of electronic ballasts (T5/T8, single element) ¹⁾ | – 18 W (ABB EVG 1x18 SF) | 23 |
| | – 24 W (ABB EVG-T5 1x24 CY) | 23 |
| | – 36 W (ABB EVG 1x36 CF) | 14 |
| | – 58 W (ABB EVG 1x58 CF) | 11 |
| | – 80 W (Helvar EL 1x80 SC) | 10 |

¹⁾ For multiple element lamps or other types the number of electronic ballasts must be determined using the peak inrush current of the electronic ballasts.

Table 2: Lamp load for SA/S x.10.1

Application programs


| Type | Name | Max. number of communication objects | Max. number of group addresses | Max. number of associations |
|--------------|------------------|--------------------------------------|--------------------------------|-----------------------------|
| SA/S 2.10.1S | Switch 2f 10A/21 | 24 | 254 | 254 |
| SA/S 4.10.1S | Switch 4f 10A/2 | 64 | 254 | 254 |
| SA/S 8.10.1S | Switch 8f 10A/2 | 124 | 254 | 254 |
| SA/S 12.10.1 | Switch 12f 10A/2 | 184 | 254 | 254 |

Table 3: Application programs SA/S x.10.1

- Note:** The programming requires the EIB Software Tool ETS2 V1.3 or higher. If the ETS3 is used a “.VD3” type file must be imported. The application program is located within the ETS2 / ETS3 in the category ABB/output/Binary output, x-fold/switch, xf10/1 (x = 2, 4, 8 or 12, number of outputs).
- Note:** The devices do not support the wear function of a project and the KNX devices in the ETS. If you inhibit access to all devices of the project with a “BA password” (ETS2) or a “BCU code” (ETS3), it has no effect on this device. Reading out data and programming is still possible.
- Detailed information about the application can be found in the product manual for the “Switch Actuators SA/S”. This manual can be free downloaded under www.abb.de/eib.

6


Wiring diagram

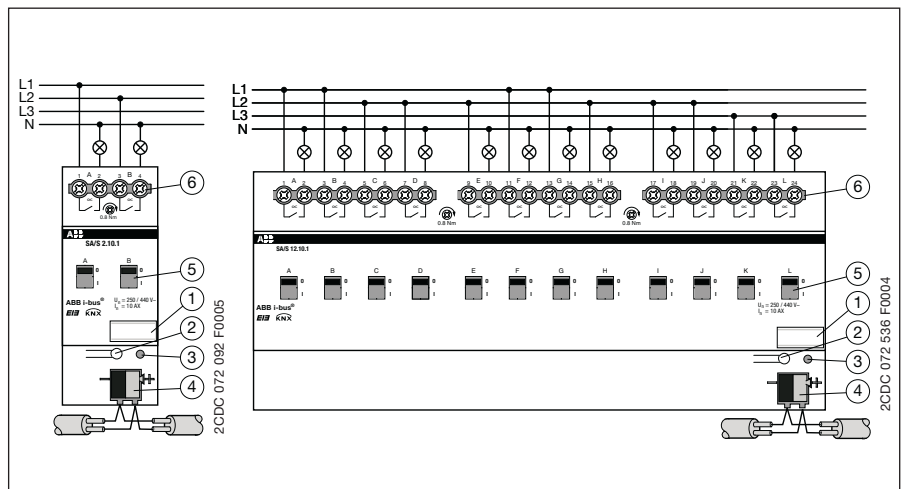

- 1 Label carrier
- 2 Programming button
- 3 Programming LED
- 4 Bus Connection Terminal
- 5 Contact position indication and manual operation
- 6 Load current circuits, per circuit 2 connection terminals

Note: All-pole disconnection must be observed in order to avoid dangerous contact voltage which can develop via loads in other phases.

Dimension drawings

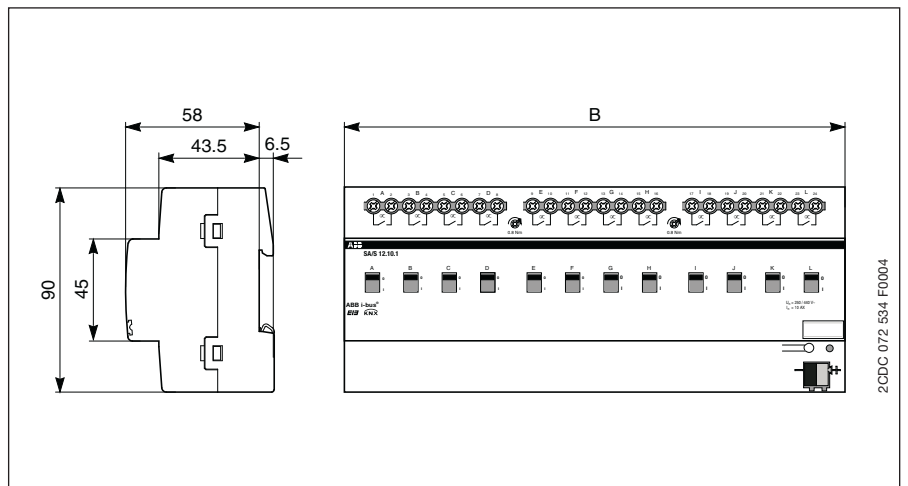

| | SA/S 2.10.1 | SA/S 4.10.1 | SA/S 8.10.1 | SA/S 12.10.1 |
|---|--------------------------|--------------------------|---------------------------|----------------------------|
| B | 36 mm 2 module widths | 72 mm 4 module widths | 144 mm 8 module widths | 216 mm 12 module widths |

Notes

