



Image may differ from product. See technical specification for details.

# NA 2200.2RS

Support roller (yoke-type track roller), without flange rings, with integral sealing

Support rollers (yoke-type track rollers) are designed to run on all types of tracks and to be used in cam drives, conveyor systems, etc. They are based on a single row needle roller bearing with an inner ring and have a thick-walled outer ring with a crowned running surface. They are supplied sealed and are ready-to-mount. The inner ring contains a

lubrication hole to facilitate relubrication. The inner ring can be mounted separately from the outer ring and roller and cage assembly.

- High radial load carrying capacity
- Able to withstand shock loads
- Ready to mount
- Separable design
- Integral sealing prolongs bearing service life

# **Overview**

## **Dimensions**

Functional outside diameter	30 mm
Bore diameter	10 mm
Width, total	14 mm
Width, outer ring	13.8 mm

## Performance

Basic dynamic load rating	6.6 kN
Basic static load rating	7.5 kN
Limiting speed	6 300 r/min


# **Properties**

Bearing part	Complete track roller	
Rolling elements	Needle rollers	
Number of rows	1	
Outer ring profile	Crowned	
Axial guidance of outer ring	Yes	
Number of flanges, outer ring	2	
Cage	With	
Radial internal clearance	CN	
Tolerance class	Other	
Material, bearing	Bearing steel	
Coating	Without	
Sealing	Seal on both sides	
Sealing type	Contact	
Lubricant	Grease	
Relubrication feature	With	

# Logistics

Product net weight	0.06 kg
eClass code	23-05-09-03
UNSPSC code	31171512

# **Technical specification**

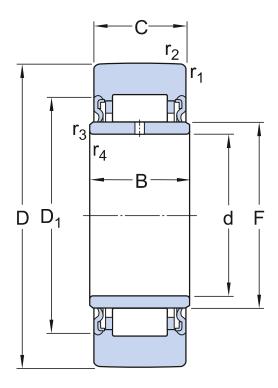

## **Dimensions**

D	30 mm	Outside diameter
d	10 mm	Bore diameter
С	13.8 mm	Width outer ring
В	14 mm	Width inner ring
$D_1$	20 mm	Recess diameter outer ring shoulder
F	14 mm	Raceway diameter inner ring
r <sub>1,2</sub>	min. 0.6 mm	Chamfer dimension outer ring
r <sub>3,4</sub>	min. 0.3 mm	Chamfer dimension inner ring

## Calculation data

Basic dynamic load rating	С	6.6 kN
Basic static load rating	C <sub>0</sub>	7.5 kN
Fatigue load limit	$P_{\rm u}$	0.88 kN
Maximum dynamic radial load	F <sub>r</sub>	max. 12 kN
Maximum static radial load	F <sub>Or</sub>	max. 17.3 kN
Limiting speed		6 300 r/min

## Tolerances and clearances

## GENERAL SUPPORT ROLLER SPECIFICATIONS

- Tolerances: Normal, Other
- Radial internal clearance: table

### **BEARING INTERFACES**

- Seat tolerances for standard conditions
- Tolerances and resultant fit

# **More Information**

Product details	Engineering information	<b>,</b> ➢ Tools
Designs and variants		SKF Product select
Lubrication	Principles of rolling bearing selection	Bearing Frequency Calculator
General support roller specifications	General bearing knowledge	SimPro Quick
Loads	Bearing selection process	LubeSelect for SKF greases
	Bearing interfaces	
Temperature limits	Lubrication	Heater selection tool
Speed limits		
Design considerations	External sealing, mounting and dismounting	
Mounting	Bearing failure and how to prevent it	
Designation system		



# Terms of use

By accessing and using this website / app owned and published by AB SKF (publ.) ( $556007-3495 \cdot Gothenburg$ ) ("SKF"), you agree to the following terms and conditions:

#### Warranty Disclaimer and Limitation of Liability

Although every care has been taken to assure the accuracy of the information on this website / app, SKF provides this information "AS IS" and DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. You acknowledge that your use of this website / app is at your sole risk, that you assume full responsibility for all costs associated with use of this website / app, and that SKF shall not be liable for any direct, incidental, consequential, or indirect damages of any kind arising out of your access to, or use of the information or software made available on this website / app.

Any warranties and representations in this website / app for SKF products or services that you purchase or use will be subject to the agreed upon terms and conditions in the contract for such product or service.

Further, for non-SKF websites / apps that are referenced in our website / app or where a hyperlink appears, SKF makes no warranties concerning the accuracy or reliability of the information in these websites / apps and assumes no responsibility for material created or published by third parties contained therein. In addition, SKF does not warrant that this website / app or these other linked websites / apps are free from viruses or other harmful elements.

#### Third Party Services

When viewing YouTube content via the SKF website(s) (i.e. using YouTube API Services), you agree to be bound by the YouTube Terms of Service.

#### Copyright

Copyright in this website / app copyright of the information and software made available on this website / app rest with SKF or its licensors. All rights are reserved. All licensed material will reference the licensor that has granted SKF the right to use the material. The information and software made available on this website / app may not be reproduced, duplicated, copied, transferred, distributed, stored, modified, downloaded or otherwise exploited for any commercial use without the prior written approval of SKF. However, it may be reproduced, stored and downloaded for use by individuals without prior written approval of SKF. Under no circumstances may this information or software be supplied to third parties.

This website /app includes certain images used under license from Shutterstock, Inc.

#### Trademarks and Patents

All trademarks, brand names, and corporate logos displayed on the website / app are the property of SKF or its licensors, and may not be used in any way without prior written approval by SKF. All licensed trademarks published on this website / app reference the licensor that has granted SKF the right to use the trademark. Access to this website / app does not grant to the user any license under any patents owned by or licensed to SKF.

### Changes

SKF reserves the right to make changes or additions to this website / app at any time.