



Hardened Industrial 100Base-FX Multi-Mode SC Fiber Converter (2 km, 1.2 mi.)

TI-F10SC (v1.0R)

- Hardened IP40 rated compact housing
- 100Base-FX Multi-Mode fiber over distances of up to 2 km (1.2 mi.)
- SC-type fiber port
- Extreme -40 to 75 °C (-40 to 167 °F) operating temperature range
- Overload current protection
- Includes DIN-Rail and wall mounts
- Power supply sold separately (model TI-M6024)

TRENDnet's TI-F10SC is a compact IP40 rated 100Base-FX fiber converter with hardened components rated for extreme industrial environments. It accommodates building-to-building or long distance networking with 100Base-FX Multi-Mode fiber over distances of up to 2 km (1.2 miles). Both DIN-Rail and wall mount hardware is included. Power supply sold separately: model TI-M6024.



Network Ports

1 x 10/100 Mbps Ethernet port and 1 x 100Base-FX SC-type fiber port



Fiber

100Base-FX Multi-Mode fiber over distances of up to 2 km (1.2 miles)



Dip Switches

Dip Switch 1: Enable/disable Link Fault Pass Through (LFP) support
Dip Switch 2: Converter mode or switch mode



DIN-Rail/Wall Mounts

IP40 rated metal enclosure with included DIN-Rail and wall mount hardware



Extreme Temperatures


Hardened converter is rated for an operating temperature range of -40 to 75 °C (-40 to 167 °F)



LED indicators

LED indicators confirm network connectivity

Networking Solution

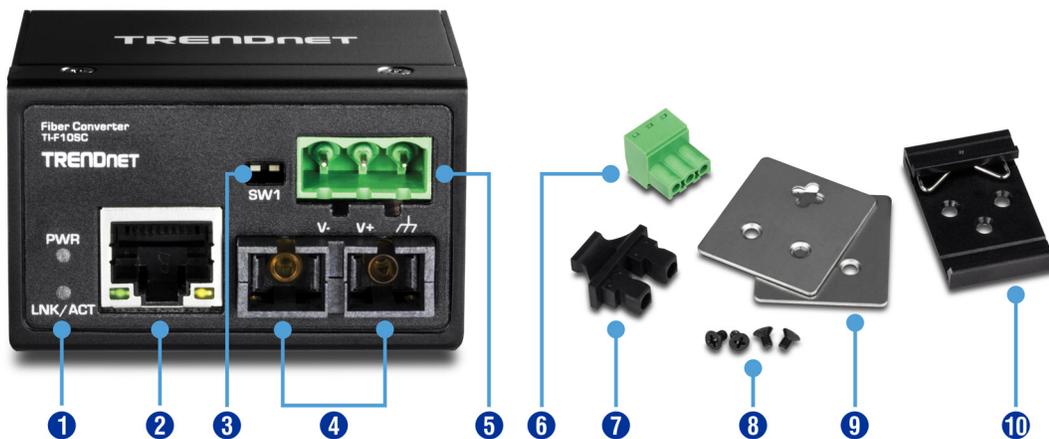

- 1 LED indicators
- 2 100M Ethernet port
- 3 DIP switch
- 4 Multi-mode fiber port
- 5 Terminal block slot
- 6 Terminal block
- 7 Dust cap
- 8 Screws
- 9 Wall mounting kit
- 10 DIN-Rail mount

Specifications

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3x

Device Interface

- 1 x 10/100 Mbps port
- 1 x 100Base-FX port (SC-type)
- 3-pin terminal block
- LED indicators
- DIN-Rail mount
- Wall mount

Data Transfer Rate

- Ethernet: 10 Mbps (half duplex), 20 Mbps (full duplex)
- Fast Ethernet: 100 Mbps (half duplex), 200 Mbps (full duplex)

Special Features

- Hardened components rated for extreme temperatures
- Auto-Negotiation
- Link Fault Pass Through (LFP)
- Converter mode, switch mode
- ESD 8 KV and Surge 6 KV protection

Fiber

- Media: multi-mode SC connector
- Cable: 62.5 / 125 or 50 / 125 μ m
- Wavelength: 1310 nm
- Optical Output Power (dBm): -20 ~ -14
- Optical Input Power (dBm): -31 ~ 0
- Power Budget: 7 dBm
- Distance: 2 km

Power

- Input: 12 – 60 V DC or 18 – 36 V AC
- Compatible power supply: TI-M6024 (sold separately)
- Consumption: Max. 1.92 Watts

Terminal Block

- Power input, 3 pin
- Wire range: 0.34 mm² to 2.5 mm²

- Solid wire (AWG): 12-24/14-22
- Stranded wire (AWG): 12-24/14-22
- Torque: 5 lb. – In / 0.5 Nm / 0.56 Nm
- Wire strip length: 7-8 mm

MTBF

- 510,304 hours

Housing

- IP40 metal case
- DIN-Rail mount
- Wall mount
- Grounding point
- 8 KV ESD protection
- 6 KV surge protection

Operating Temperature

- - 40 to 75 °C (-40 to 167 °F)

Operating Humidity

- Max. 95 % non-condensing

Dimensions

- 60 x 50 x 35 mm (2.36 x 2 x 1.4 in.)

Weight

- 88 g (3.1 oz.)

Certifications

- CE
- FCC
- Shock (IEC 60068-2-27)
- Freefall (IEC 60068-2-32)
- Vibration (IEC 60068-2-6)

Warranty

- Lifetime

Package Contents

- TI-F10SC
- Quick Installation Guide
- Removable terminal block
- DIN-Rail and wall mount kit

TRENDnet offers a limited lifetime warranty on selected fiber networking products that have been purchased in the United States/Canada on or after 1/1/2019.

