

KVR333X64C25/1G
1GB 128M x 64-Bit DDR333
CL2.5 184-Pin DIMM

DESCRIPTION:

This document describes ValueRAM's 128M x 64-bit (1GB) DDR333 CL2.5 SDRAM (Synchronous DRAM) memory module. The components on this module include sixteen 64M x 8-bit (16M x 8-bit x 4 Bank) DDR333 SDRAM in TSOP packages. This 184-pin DIMM uses gold contact fingers and requires +2.5V. The electrical and mechanical specifications are as follows:

FEATURES:

<input checked="" type="checkbox"/> Clock Cycle Time (tCK)	6ns (min.) / 12ns (max.)
<input checked="" type="checkbox"/> Row Cycle Time (tRC)	60ns (min.)
<input checked="" type="checkbox"/> Refresh Row Cycle Time (tRFC)	72ns (min.)
<input checked="" type="checkbox"/> Row Active Time (tRAS)	42ns (min.) / 70,000ns (max.)
<input checked="" type="checkbox"/> Single Power Supply of	+2.5V (+/- .25V)
<input checked="" type="checkbox"/> Power (IDD0)	5.200 W (operating)
<input checked="" type="checkbox"/> UL Rating	94 V - 0

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

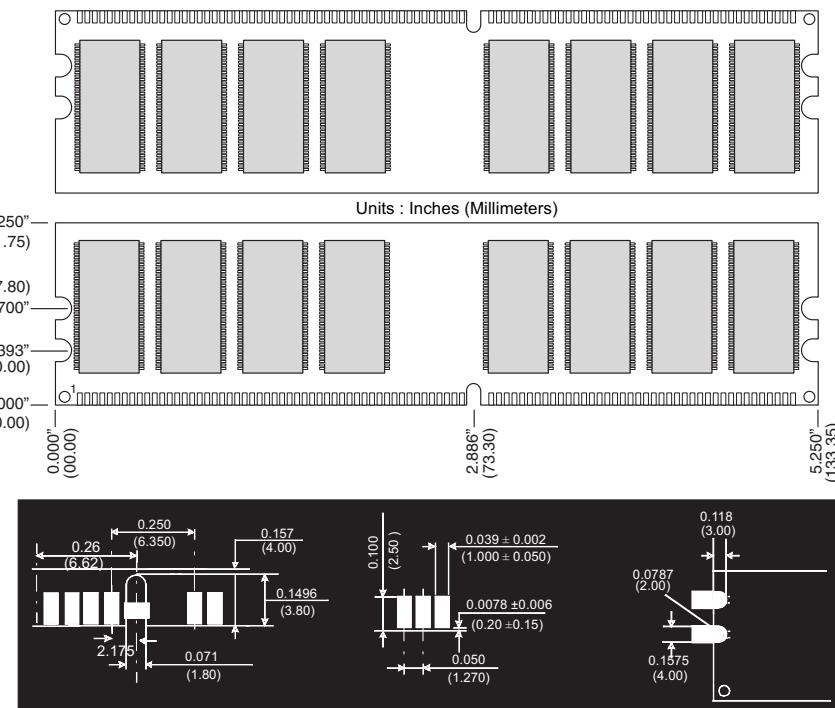


Figure 1: KVR333X64C25/1G 184-Pin DDR SDRAM Module