UNCONTROLLED DOCUMENT

Ø31.00 [Ø1.220] Ø25.00 [Ø0.984]

Ø21.50 [Ø0.846]

Ø20.50 [Ø0.807]

PART NUMBER SSI-LXH20R6SUGD

DATE


TEST COND


 $I_r=100\mu A$


 $I_f = 20 \text{mA}$

REV.


E.C.N. NUMBER AND REVISION COMMENTS E.C.N. #11137. 6.17.04






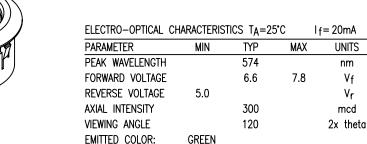

EPOXY LENS FINISH: GREEN DIFFUSED

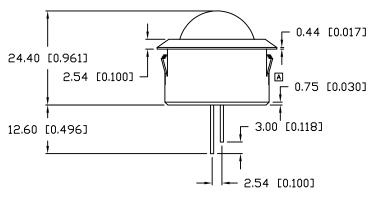







PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	•c
SOLDERING TEMP.	+ 260	•C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS

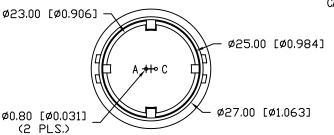

Ø20.00 [Ø0.787]



PANEL CUTOUT

NOTES:

- 1. SSH-LXH20R6-B, BLACK HOLDER.
- 2. SSL-LX20R6SUGD, GREEN LED.
- 3. LONGER PIN DENOTES ANODE.

UNCONTROLLED DOC *UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.002), LEAD SIZE=±0.05 (±0.002), LEAD SIZE=

REV. PART NUMBER SSI-LXH20R6SUGD

> 20mm 6 CHIP LED WITH PANEL MOUNT HOLDER, 574nm GREEN LED, GREEN DIFFUSED LENS.

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

1.50~4.00 [0.059~0.157][]

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED

PAGE: 1 OF 1 SCALE: N/A

6.15.04