



Ledman Optoelectronic Co., Ltd.

DATA SHEET


MODEL No : LL1503PUPG1-301
DOC. No : LMS-15-116
Revision: 02

Description:

- 5mm Round lamp
- Lens Color: Water Clear
- Emitting Color: Pure Green
- Viewing Angle :30°
- No Stopper

Dice Material: InGaN

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVED SIGNATURES
Dan yang	Zhensheng Xie	Yanshan Liu	

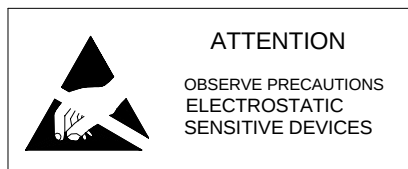

Add: Building 8,Block 2,Baimang Baiwangxin Industrial Park,
Xili Area,Nanshan District,Shenzhen, P.R.China

Tel: 86-755-86139688

Fax: 86-755-86139001



Model No.	LL1503PUPG1-301
Doc. No.	LMS-15-116
Revision:	02

Applications:

Absolute Maximum Ratings at Ta = 25°C

Items	Symbol	Absolute maximum Rating	Unit
Forward Current	I_F	25	mA
Peak Forward Current*	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	100	mW
Operation Temperature	T_{opr}	-20 ~ +75	°C
Storage Temperature	T_{stg}	-30 ~ +80	°C
Lead Soldering Temperature	T_{sol}	Max.260°C for 3 sec Max. (3mm from the base of the epoxy bulb)	

*pulse width $\leq 0.1\text{msec}$ duty $\leq 1/10$


Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 20\text{mA}$	2.8	3.4	4.0	V
Reverse Current	I_R	$V_R = 5\text{V}$	---	---	10	μA
Dominant Wavelength	λ_D	$I_F = 20\text{mA}$	---	525	---	nm
Luminous Intensity	I_V	$I_F = 20\text{mA}$	---	7600	---	mcd
50% Power Angle	20°H-H	$I_F = 20\text{mA}$	---	30	---	deg
	20°V-V	$I_F = 20\text{mA}$	---	--	---	deg

Important Notes:

- 1) All ranks will be included per delivery, rank ratio will be determined by LEDMAN.
- 2) Tolerance of measurement of luminous intensity is $\pm 15\%$.
- 3) Tolerance of measurement of dominant wavelength is $\pm 1\text{nm}$.
- 4) Tolerance of measurement of V_f is $\pm 0.05\text{V}$.
- 5) Packaging methods are available for selection, please refer to PACKAGING STANDARD.
- 6) Please refer to LED LAMP RELIABILITY TEST STANDARD for reliability test conditions.

Dimension Drawing

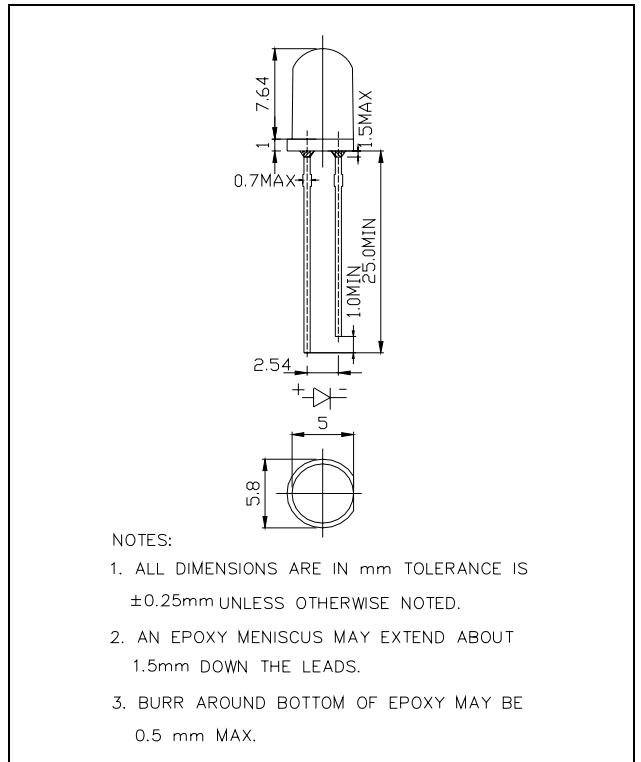

Typical Optical-Electronic Characteristic Curves

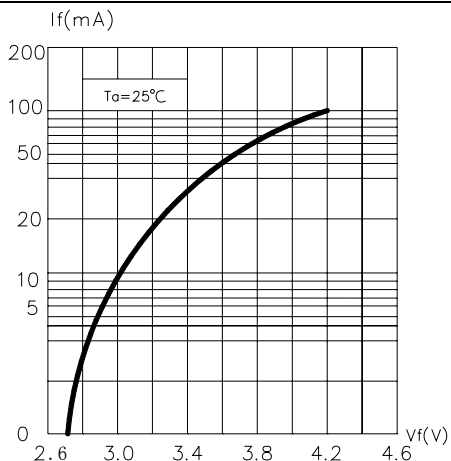


Fig.1 Forward Current vs. Forward Voltage

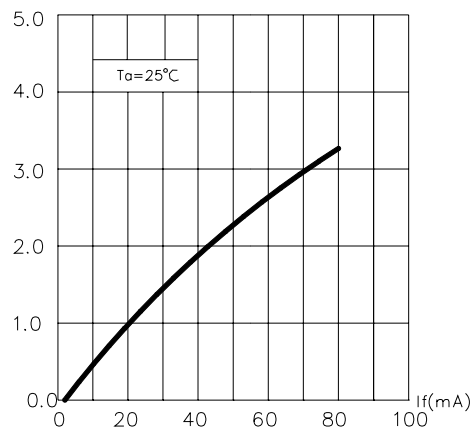


Fig.2 Relative Luminous Intensity vs. Forward Current

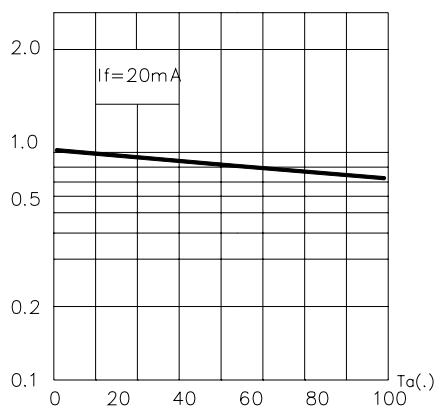


Fig.3 Relative Luminous Intensity vs. Ambient Temperature

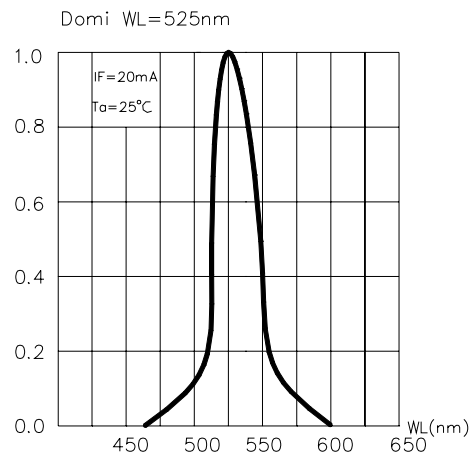


Fig.4 Relative Luminous Flux vs. Wavelength

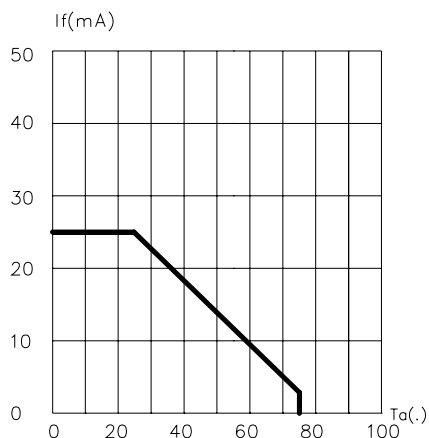


Fig.5 Maximum Forward Current vs. Ambient Temperature

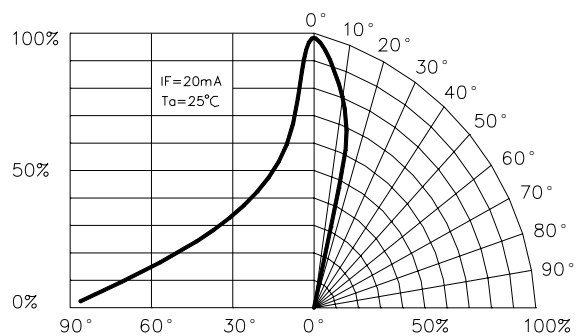


Fig.6 Relative Luminous Intensity vs. Radiation Angle

Items	Signatures	Date	R&D ISSUE
Prepared by	Dan yang	1-01-2008	
Checked by	Zhensheng Xie	1-01-2008	
Approved by	Yanshan Liu	1-01-2008	