



Free Height

TE Internal #: 1-5316562-1
PCB Mount Header, Vertical, Board-to-Board, 160 Position, .6 mm [.024 in] Centerline, Gold (Au), Surface Mount, Signal, Black, Tray, Free Height
[View on TE.com >](#)

Connectors > PCB Connectors > PCB Headers & Receptacles



PCB Connector Type: **PCB Mount Header**
PCB Mount Orientation: **Vertical**
Connector System: **Board-to-Board**
Number of Positions: **160**
Centerline (Pitch): **.6 mm [.024 in]**

Features

Product Type Features

Ground Feature Type	Grounding Contact, Grounding Plate
PCB Connector Type	PCB Mount Header
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Board-to-Board Configuration	Parallel
Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	160

Electrical Characteristics

Operating Voltage	50 VAC
Insulation Resistance	2 MΩ
Dielectric Withstanding Voltage (Max)	200 VAC

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Mating Area Plating Material Thickness	.2 μm[7.874 μin]
--	------------------



Mating Tab Width	.3 mm[.012 in]
PCB Contact Termination Area Plating Material Thickness	1 µm[39.37 µin]
Contact Layout	Inline
Contact Mating Area Length	1 mm, 1.3 mm
Contact Base Material	Copper Alloy
Mating Tab Thickness	.2 mm[.008 in]
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Pin
Contact Current Rating (Max)	.5 A

Termination Features

Square Termination Post & Tail Dimension	.2 mm[.008 in]
Termination Method to PCB	Surface Mount

Mechanical Attachment

Mating Alignment Type	Polarization
PCB Mount Retention Type	Solder Peg
PCB Mount Alignment Type	Locating Posts
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Housing Material	High Temperature Thermoplastic
Centerline (Pitch)	.6 mm[.024 in]

Dimensions

Stack Height	8 mm, 16 mm[.63 in]
Connector Height	8 mm[.31 in]

Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards



UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	30
Packaging Method	Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

TE Part # 1-5316318-1
.6FHR12H,160,S,GIG,08/Sn,HT,SEYes

TE Part # 6-5353189-1
.6FHR04H,160,S,STD,08/SP,TR,SEN0

TE Part # 1-5353189-1
.6FHR04H,160,S,STD,08/SP,TR,NSNo

TE Part # 1-5316560-1
.6FHR04H,160,S,GIG,08/Sn,HT,SEYes

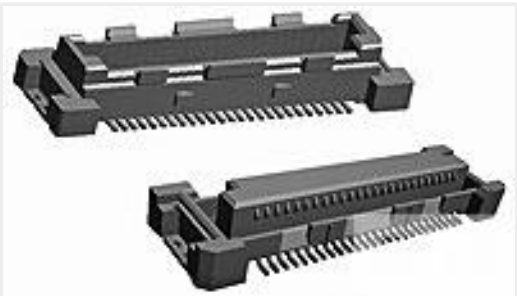


TE Part # 1-5316564-1
[.6FHR12H,160,S,GIG,08/Sn,ST,NSYes](#)




TE Part # 1-5353190-1
[.6FHR04H,160,S,GIG,08/Sn,TR,NSNo](#)

Also in the Series | **Free Height**

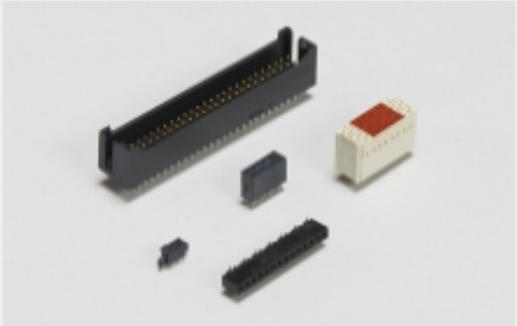

[Board-to-Board Headers & Receptacles\(747\)](#)

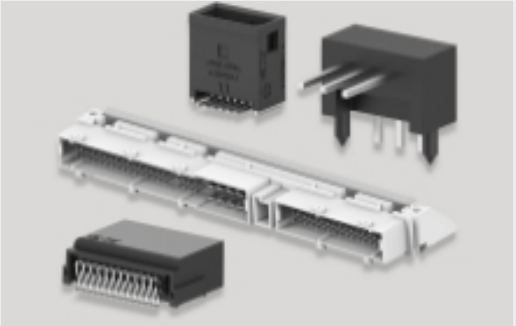


[PCB Headers & Receptacles\(747\)](#)

Customers Also Bought



TE Part #2-1625892-8
[3W SM M/OX 5% 20K](#)

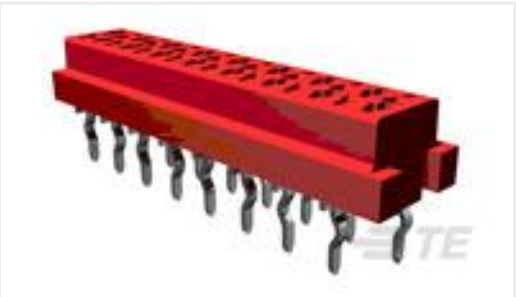

TE Part #8-215079-4
[MICRO-MATCH FOB.14P](#)



TE Part #2-644488-2
[02P MTA100 SHRD HDR F/L R/A SN](#)




TE Part #5747843-2
[37 MSFL PLUG RA 318 \(FM,BL\)](#)



TE Part #5-146280-8
[08 MODII HDR SRST B/A .100CL](#)




TE Part #5-1437648-7
[4PCV-02-006=4PCV ASSEMBLY](#)

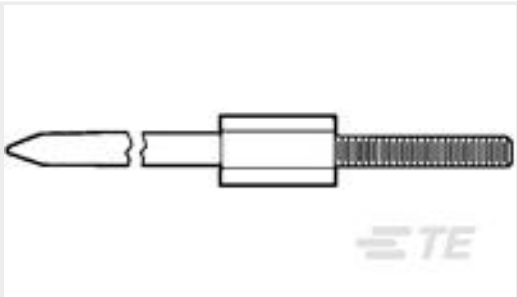

TE Part #533082-4
[HDI KEYING POWER PIN PLTD](#)



TE Part #224408-E
[STVC 96 F ABC VV 7-00 EE 5,5 * 247 E007](#)

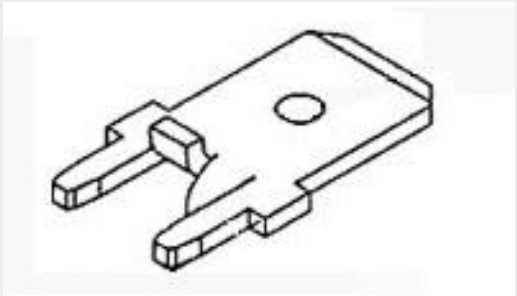

TE Part #63862-1
[250 FASTON TAB TPBR](#)



TE Part #364899-E
[STVE 48 M ACE GGG 4-00 1006 * 8392 247 E](#)



Documents

Product Drawings

[.6FHP08H,160,S,GIG,08/Sn,ST,NS](#)

Japanese

CAD Files

3D PDF

English

Customer View Model

[ENG_CVM_1-5316562-1_O.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_1-5316562-1_O.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_1-5316562-1_O.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Fine Pitch Stacking Connectors - 0.6mm Free Height \(FH\) and GIGA Connectors](#)

English

Product Specifications

[Application Specification](#)

English