THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JAN ,2005.
© COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
E	B

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	EBD0-0267-04	12JAN05	JMS	FWK

NOTES

1. 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
2. SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
3. Au PLATING OVER Ni PLATING OVER Cu PLATING
4. Ni PLATING OVER Cu PLATING
5. CHARACTERISTICS

FREQUENCY RANGE (50 OHMS):	DC-4GHz
FREQUENCY RANGE (75 OHMS):	DC-2GHz
INSULATION RESISTANCE:	5000 MOHMS
WORKING VOLTAGE:	500V
DIELECTRIC WITHSTAND VOLTAGE:	1500V RMS
TEMPERATURE RATE:	-55°C TO +85°C
CONTACT RESISTANCE:	3 mOHMS

6. MECHANICAL CHARACTERISTICS
   DURABILITY: 50 CYCLES
7. FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
8. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

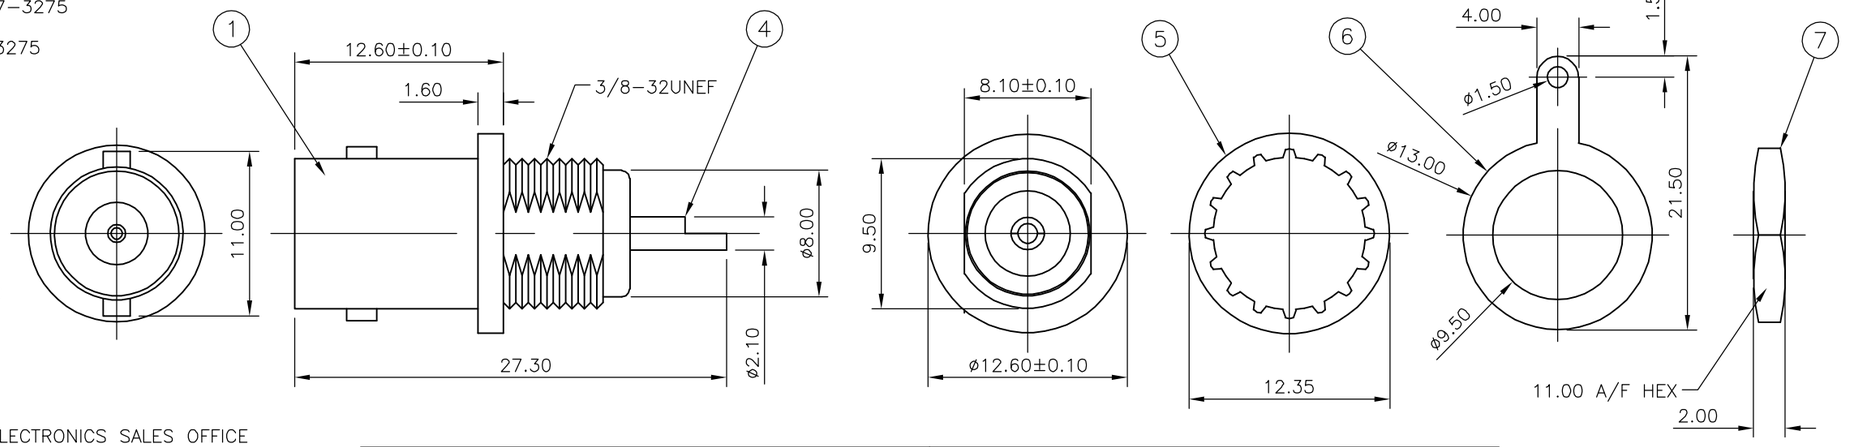

50 OHMS VERSION

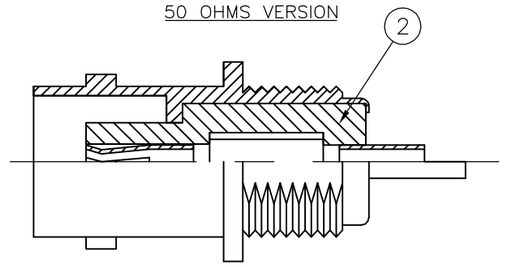

75 OHMS VERSION

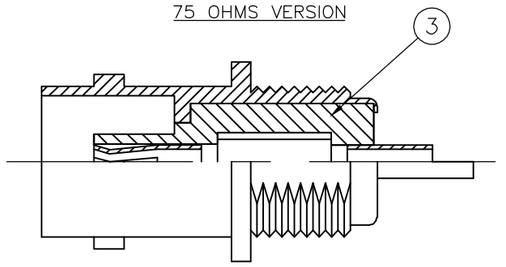

RECOMMENDED PANEL CUTOUT DIMENSIONS

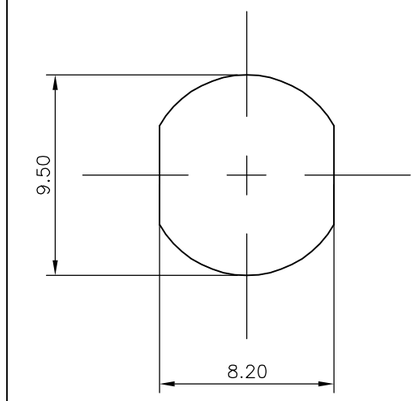

				1	1	1	1	BRASS 4	HEX NUT	7
				1	1	1	1	BRASS 4	SOLDER TAG	6
				1	1	1	1	STEEL 4	LOCK WASHER	5
				1	1	1	1	PHOS BRONZE 3	CONTACT	4
				1	1	–	–	POLYMETHYLPENTENE	INSULATOR	3
				–	–	1	1	POLYMETHYLPENTENE	INSULATOR	2
				1	1	–	–	ZINC ALLOY 4	BODY	1
				5--3	5--2	5--1	5--0	MATERIAL	DESCRIPTION	ITEM
				2	1	2	1			
QUANTITY PER ASSY								PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE

FINISH: –

DWN	J.SANDWELL 12JAN05
CHK	S.PARLOW 12JAN05
APVD	F.WHEELER-KING 12JAN05
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	–

CUSTOMER DRAWING

tyco Electronics
Tyco Electronics Corporation
Bideford, UK, EX39 4HE

NAME
BNC BULKHEAD SOCKET FRONT MOUNT WITH SOLDER TAG
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1634523	–

SCALE	SHEET	REV
NTS	1 OF 1	A