

Base element - CB S-BE - 2905067

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Solder base element for PCB mounting for accommodating CB TM... or CB E... device circuit breakers

Your advantages

- Systematic integration of protection and distributor functions
- Increased efficiency through considerably reduced wiring
- Solder base element with circuit breaker, can be locked thanks to retaining clips
- Solder base element can be coded by means of lock-and-key principle
- For accommodating CB TM1... / CB E1... device circuit breakers



Key Commercial Data

Packing unit	30 pc
GTIN	 4 046356 916110
GTIN	4046356916110
Weight per Piece (excluding packing)	10.670 g
Custom tariff number	85366990
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

General

Flammability rating according to UL 94	V-0
Mounting type	On PCB
Type	Base element, PCB mounting

Electrical data

Rated voltage main circuit	80 V DC
	277 V AC
Rated current main circuit	16 A

Base element - CB S-BE - 2905067

Technical data

Electrical data

Rated voltage remote indication circuit	80 V DC
	277 V AC
Rated current remote indication circuit	1 A
Rated insulation voltage U_i	80 V DC
	277 V AC
Rated surge voltage	2.5 kV
Insertion/withdrawal cycles	50

Dimensions

Height	34.8 mm
Width	12.3 mm
Depth	36.4 mm

Ambient conditions

Ambient temperature (operation)	-30 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Humidity test	240 h, 95 % RH, 40 °C
Degree of protection	IP30 (Plug-in area with plugged-in device)
	IP00 (Connection area)

Standards and Regulations

Standards/specifications	DIN EN 50155
	IEC 60068-2


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings


Base element - CB S-BE - 2905067

Circuit diagram

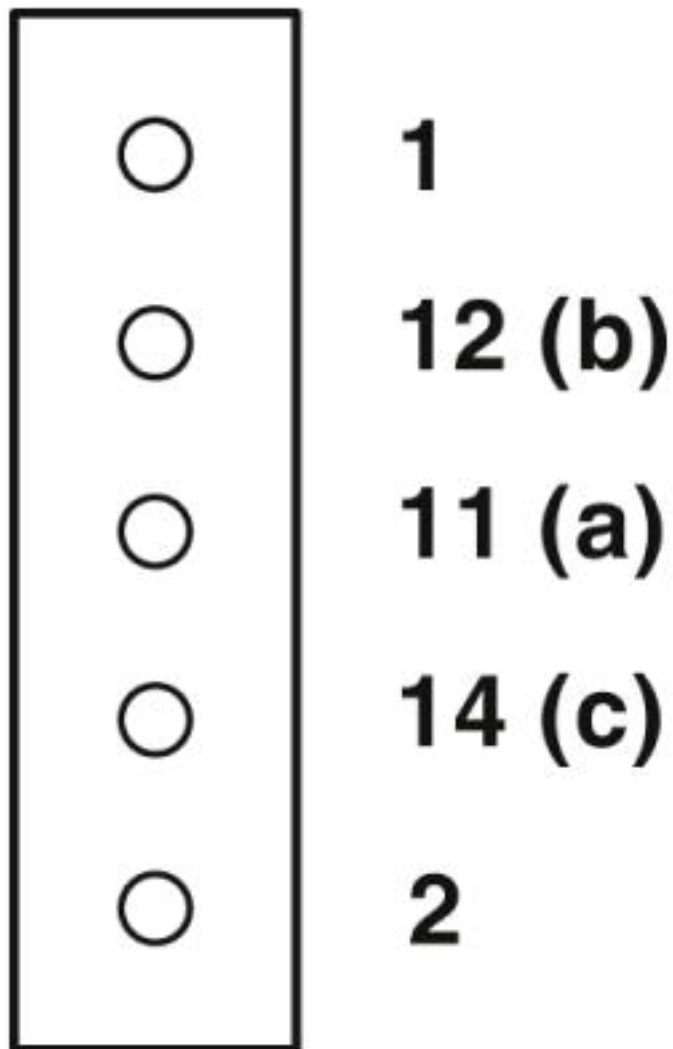


Base element - CB S-BE - 2905067

Dimensional drawing

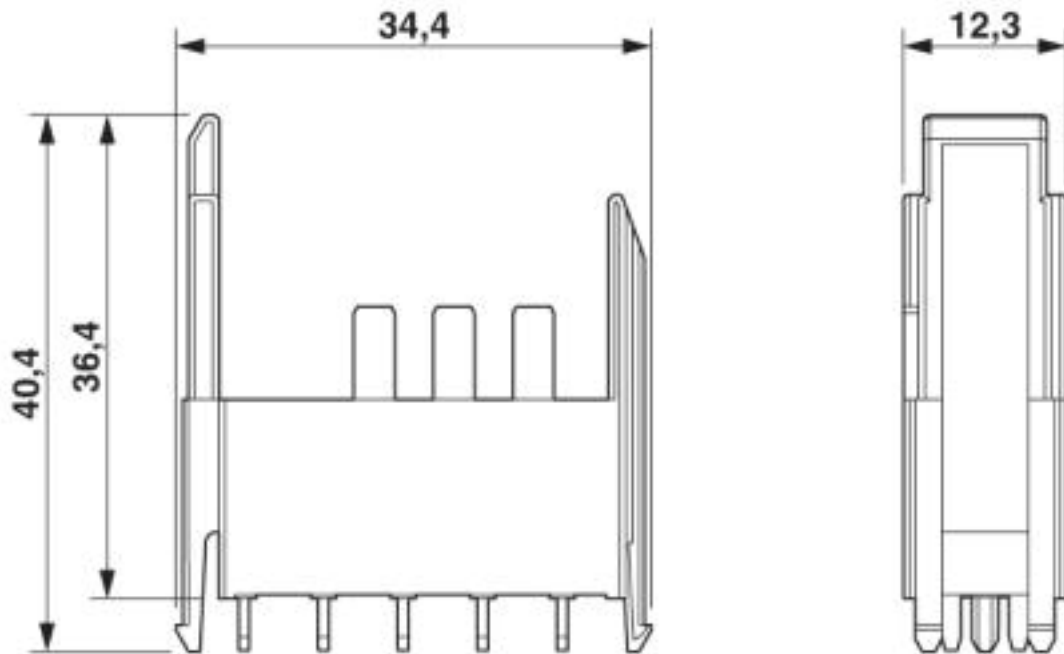

Base element - CB S-BE - 2905067

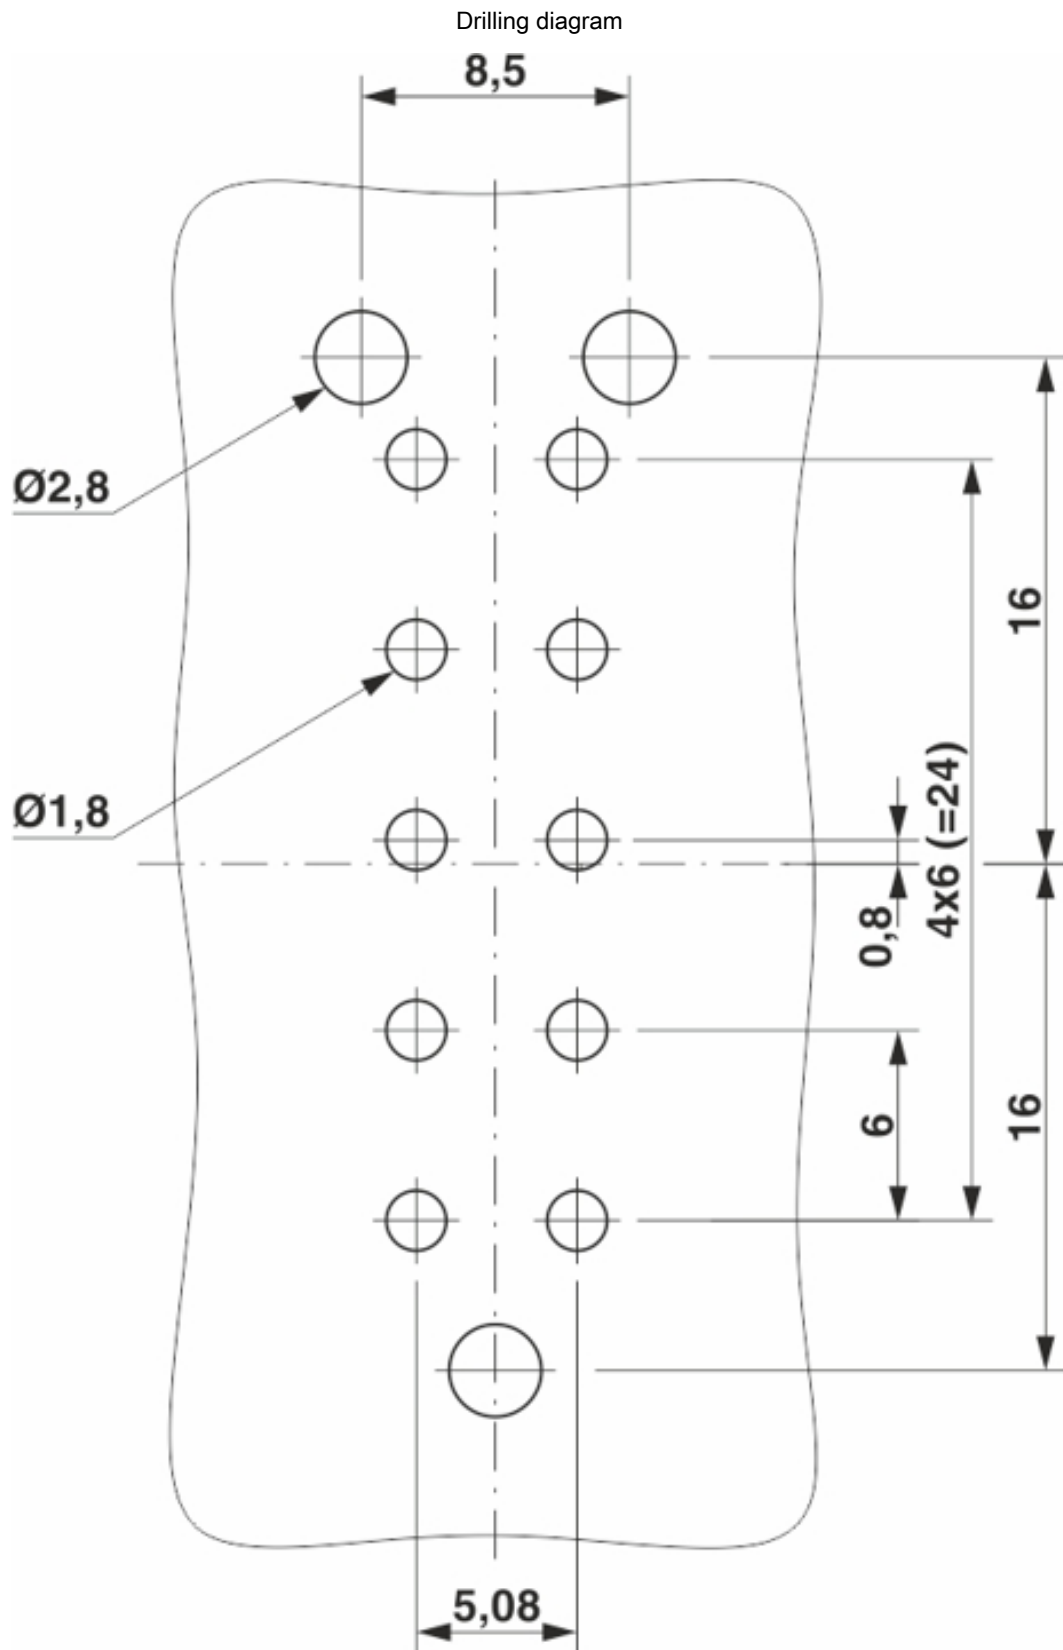

Base element - CB S-BE - 2905067

Classifications

eCl@ss

eCl@ss 4.0	27141100
eCl@ss 4.1	27141100
eCl@ss 5.0	27141100
eCl@ss 5.1	27141100
eCl@ss 6.0	27130800
eCl@ss 7.0	27130803
eCl@ss 8.0	27130803
eCl@ss 9.0	27130803

ETIM

ETIM 4.0	EC000899
ETIM 5.0	EC000472
ETIM 6.0	EC000472
ETIM 7.0	EC000472

UNSPSC

UNSPSC 13.2	39121620
UNSPSC 18.0	39121620
UNSPSC 19.0	39121620
UNSPSC 20.0	39121620
UNSPSC 21.0	39121620

Accessories

Accessories

Coding element

Coding star - PC - 3040588



Coding star, length: 3 mm, width: 3 mm, height: 6 mm, color: red