
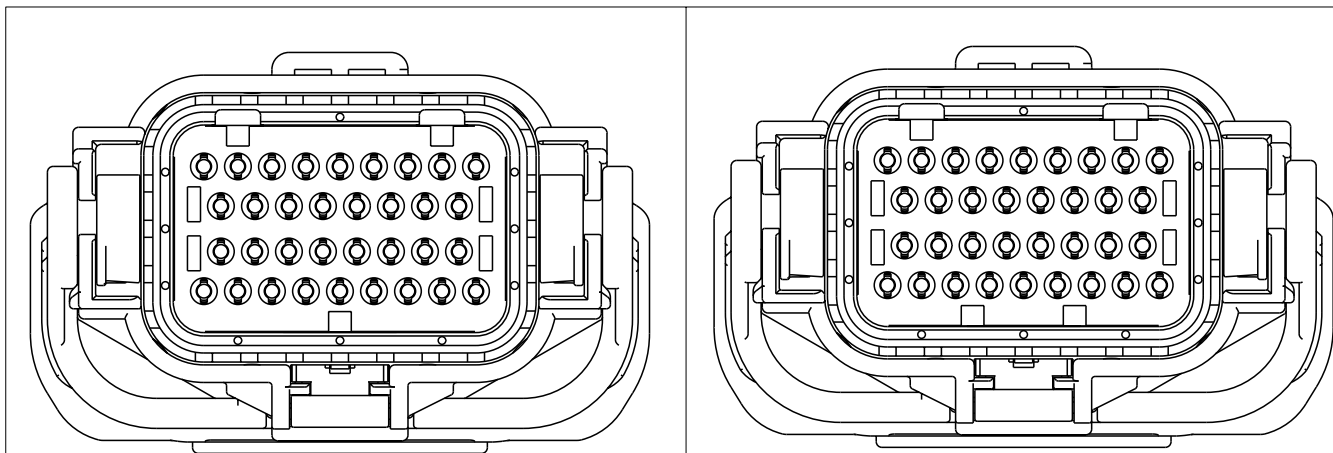
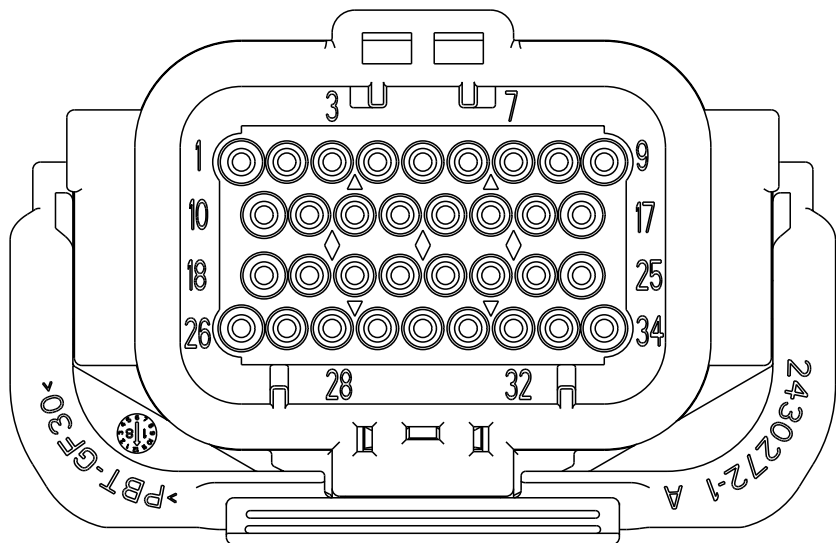
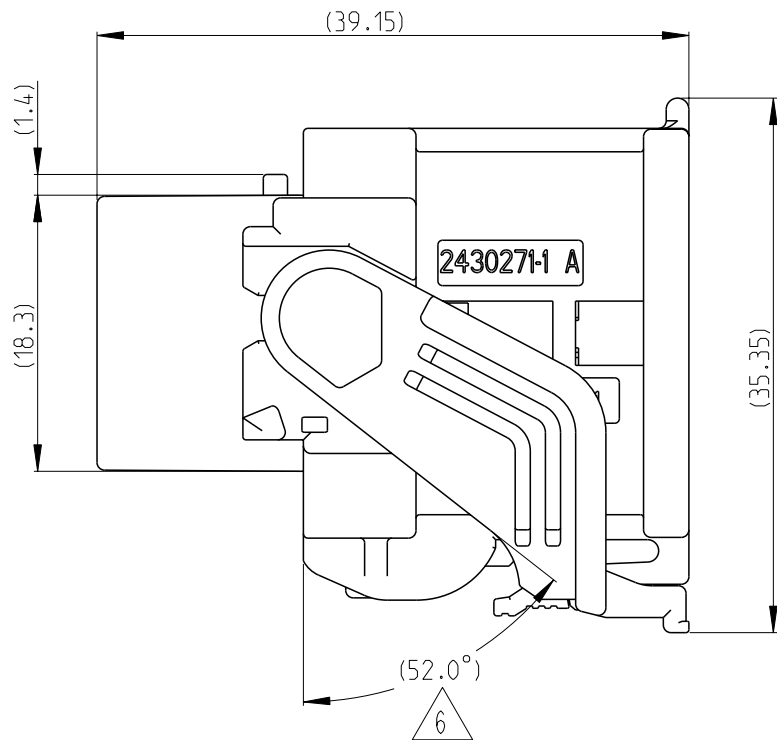
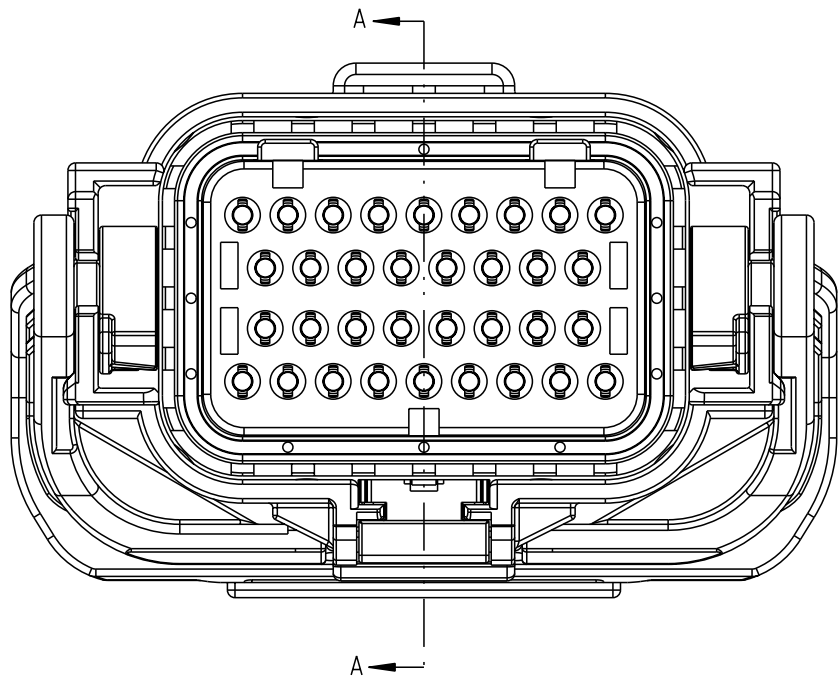
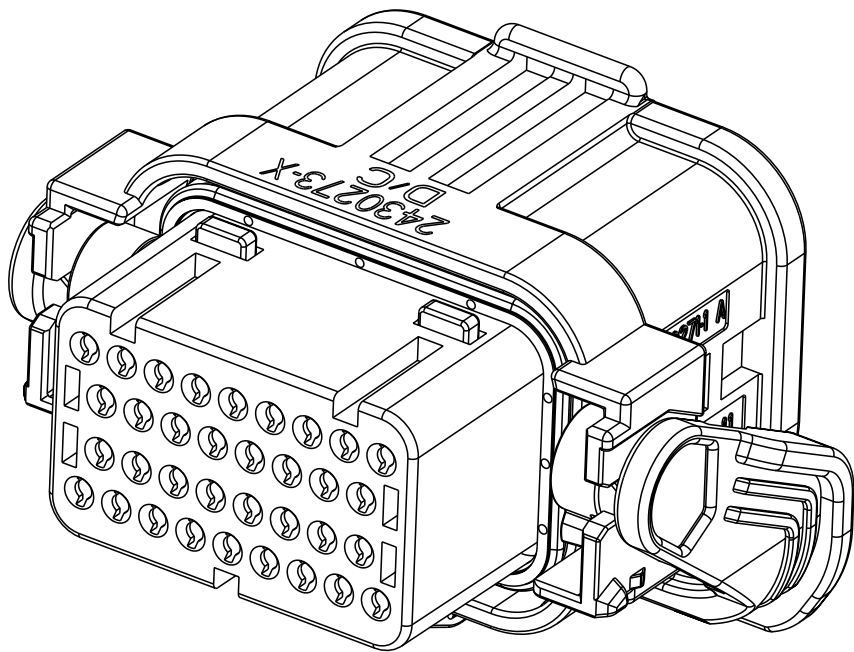
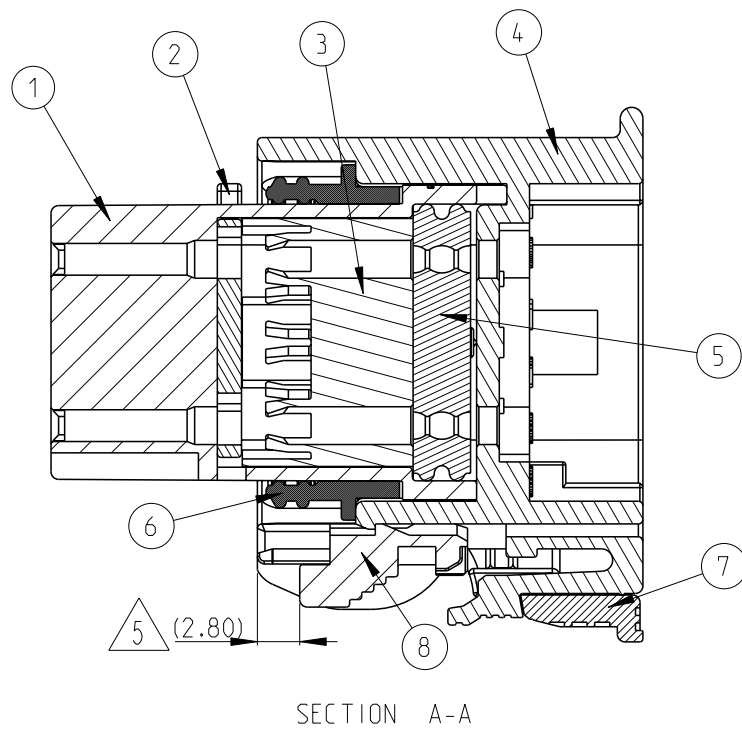


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	13NOV2024	V.T	Z.Z

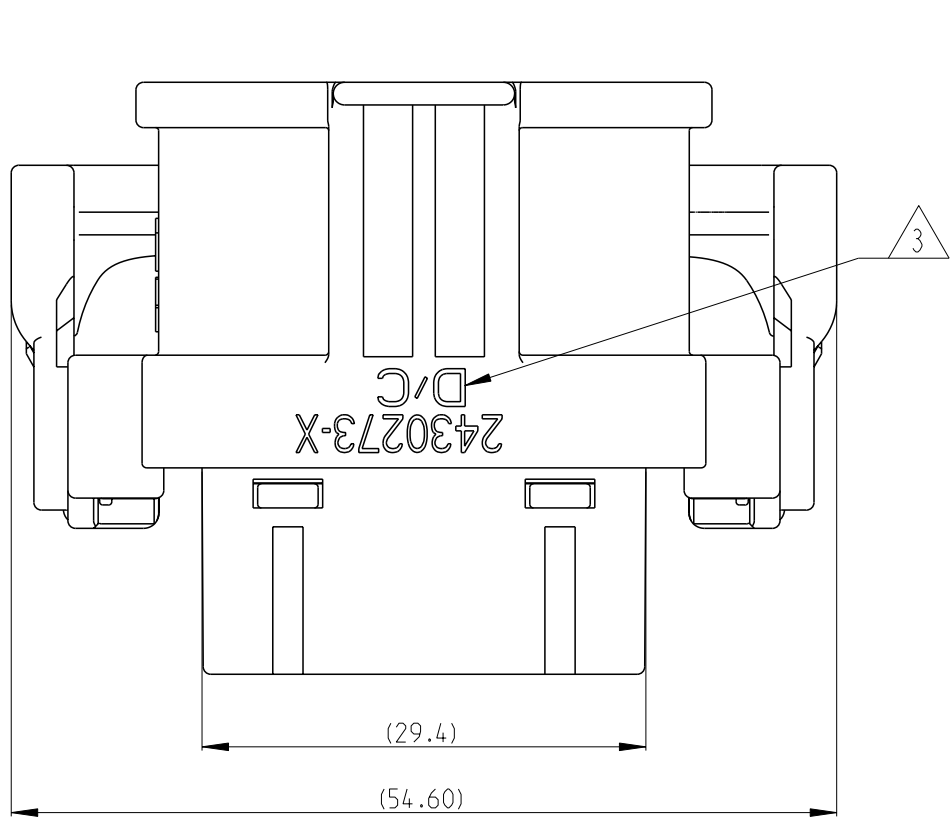

CODING 1
PN: 2430273-1

CODING 2
PN: 2430273-2

NOTES:

- 1.GENERAL TOLERANCE:±0.3
2.APPLICABLE WIRE SIZE AND CONTACT.

INSULATION DIA(MM)	WIRE EXAMPLE	INSERTABLE POSITION	CONTACT (WIRE)
Ø 2.0~Ø 2.2	AVSS 1.25mm2	1, 9, 10, 17, 18, 25, 26, 34	2461132-1 (0.75~1.25mm2) 2461132-2 (0.5mm2)
Ø 1.6~Ø 1.9	AVSS 0.5~0.85mm2	ALL POSITION	

3.PRINTING MANUFACTURED DATE CONTROL No.(LOT No.)


X X X X X	WEEK	SUN -DAY	MON -DAY	TUES -DAY	WEDNES -DAY	THURS -DAY	FRI -DAY	SATUR -DAY
	CODE	1	2	3	4	5	6	7

CODE(1~7) EG: 2
WEEK(01~54) EG: 03
YEAR EG: 1997: 97

4.PART NUMBER OF CAP ASSEMBLY TO BE MATED:8-2388688-X (X=5,6 FOR RELEVANT CODE)

5.CPA SEATED ON PRE-LOCK POSITION FOR DELIVERY.

6.LEVER SEATED ON END-LOCK POSITION FOR DELIVERY.

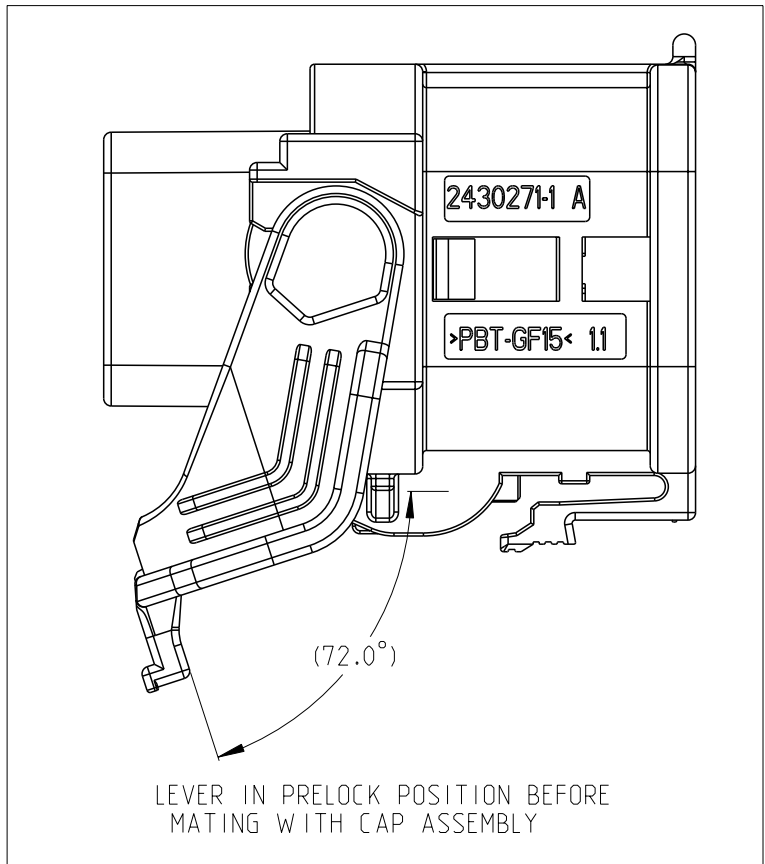

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN V.TANG	13NOV2024	TE Connectivity		
DIMENSIONS: mm		CHK C.WAN	13NOV2024			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Z.ZHOU	13NOV2024	NAME SUPER SEAL CONNECTOR 34Pos. ASSEMBLY (WITH LEVER)		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-160647 APPLICATION SPEC 114-160483 WEIGHT -				
MATERIAL -				SIZE A2	CAGE CODE 00779	DRAWING NO C=2430273
		CUSTOMER DRAWING	SCALE 2:1	SHEET 1 OF 1	REV A	RESTRICTED TO -