ENGLISH

Datasheet

Fibre Optic Cable Assembly, Multi-Mode

RS Stock number 536-6541

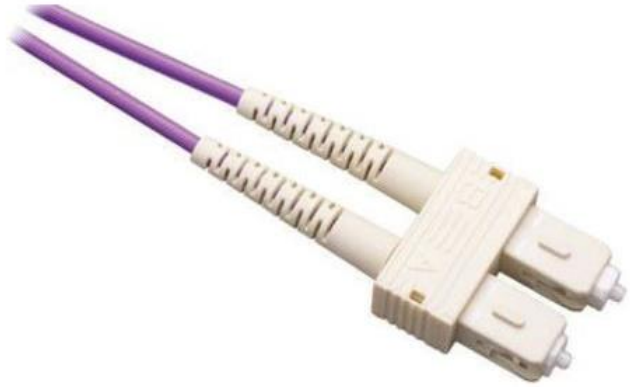

Dimensions: (mm)

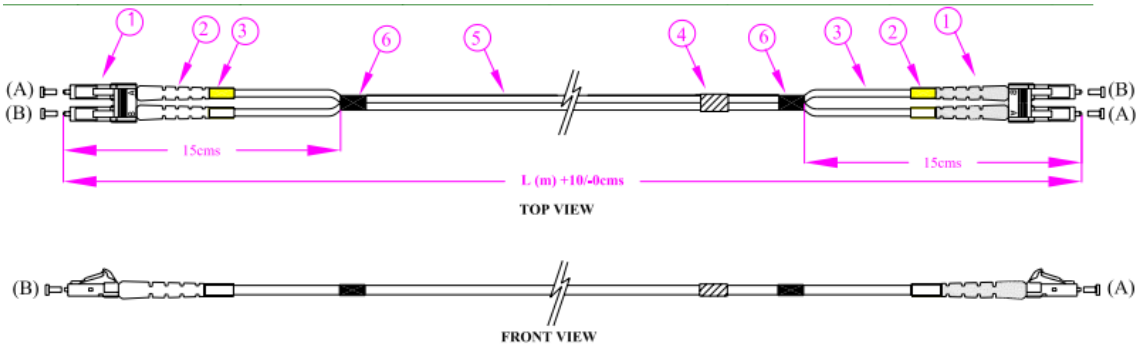

Optical Performance (IEC 61300-3-4):
Multimode (@ 1300nm)
LC : Max. IL - 0.30dB Typical: 0.20dB
Singlemode: (@1310nm and/or 1550nm)
LC : Max. IL - 0.30dB Typical: 0.20dB Return Loss: >50dB

Connector: LC clips shall be mounted on to the connector to make it duplex.

Coiling Diameter: Coiling Diameter of the patchcord shall be greater than 200mm

Id No.	Description	Ea
1.	LC Duplex Connector	2
2.	LC Boots	4
3.	LC Heat Shrink (Yellow+White)	2+2
4.	Identification Label	1
5.	1.6mm Duplex Cable (L m)	1
6.	Black Tape	2

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.