

AC servo motor BSH - 7.8 N.m - 2500 rpm - untapped shaft - without brake - IP50

BSH1003P01A2A

EAN Code: 3389118140066

Main

Device short name	BSH						
Product or component type	Servo motor						
Maximum mechanical speed	6000 rpm						
Continuous stall torque	8 N.m for LXM32.D30N4 at 10 A, 400 V, three phase 8 N.m for LXM32.D30N4 at 10 A, 480 V, three phase 7.8 N.m for LXM05CD28M2, 200240 V, single phase 7.8 N.m for LXM05AD28M2, 200240 V, single phase 7.8 N.m for LXM05BD38M2, 200240 V, single phase 7.8 N.m for LXM05BD34N4, 380480 V, three phase 7.8 N.m for LXM05BD42M3X, 200240 V, three phase 7.8 N.m for LXM05CD34N4, 380480 V, three phase 7.8 N.m for LXM05CD34N4, 380480 V, three phase 7.8 N.m for LXM05CD42M3X, 200240 V, three phase 6.7 N.m for LXM15LD21M3, 230 V, three phase 6.7 N.m for LXM15LD17N4, 230 V, three phase 6.7 N.m for LXM15LD17N4 at 10 A, 400 V, three phase 7.8 N.m for LXM15LD28M3, 230 V, three phase 7.8 N.m for LXM15LD28M3, 230 V, three phase 7.8 N.m for LXM15MD28N4, 400 V, three phase 7.8 N.m for LXM15MD28N4, 480 V, three phase 7.8 N.m for LXM15MD28N4, 480 V, three phase 7.8 N.m for LXM15MD28N4, 480 V, three phase 7.8 N.m for LXM15MD40N4, 400 V, three phase 7.8 N.m for LXM15MD40N4, 400 V, three phase 7.8 N.m for LXM15MD40N4, 480 V, three phase						
	7.8 N.m for LXM05AD34N4, 380480 V, three phase 7.8 N.m for LXM05AD42M3X, 200240 V, three phase						

Peak stall torque

28.3 N.m for LXM32.D30N4 at 10 A, 400 V, three phase 28.3 N.m for LXM32.D30N4 at 10 A, 480 V, three phase 19.69 N.m for LXM05AD28M2, 200...240 V, single phase 19.69 N.m for LXM05BD28M2, 200...240 V, single phase 19.69 N.m for LXM05CD28M2, 200...240 V, single phase 15.5 N.m for LXM15LD21M3, 230 V, three phase 12.5 N.m for LXM15LD17N4, 230 V, three phase 12.5 N.m for LXM15LD17N4, 400 V, three phase 12.5 N.m for LXM15LD17N4, 480 V, three phase 19.69 N.m for LXM15LD28M3, 230 V, three phase 19.69 N.m for LXM15MD28N4, 400 V, three phase 19.69 N.m for LXM15MD28N4 at 10 A, 480 V, three phase 23.17 N.m for LXM15MD40N4, 400 V, three phase 23.17 N.m for LXM15MD40N4, 480 V, three phase 23.01 N.m for LXM05AD34N4, 380...480 V, three phase 23.17 N.m for LXM05AD42M3X, 200...240 V, three phase 23.01 N.m for LXM05BD34N4, 380...480 V, three phase 23.17 N.m for LXM05BD42M3X, 200...240 V, three phase 23.01 N.m for LXM05CD34N4, 380...480 V, three phase 23.17 N.m for LXM05CD42M3X, 200...240 V, three phase

Nominal output power

2000 W for LXM32.D30N4 at 10 A, 400 V, three phase 2600 W for LXM32.D30N4 at 10 A, 480 V, three phase 1100 W for LXM05AD28M2, 200...240 V, single phase 1100 W for LXM05BD28M2, 200...240 V, single phase 1100 W for LXM05CD28M2, 200...240 V, single phase 1100 W for LXM05AD42M3X, 200...240 V, three phase 1100 W for LXM05BD42M3X, 200...240 V, three phase 1100 W for LXM05CD42M3X, 200...240 V, three phase 1300 W for LXM15LD28M3, 230 V, three phase 1700 W for LXM15LD17N4, 230 V, three phase 1700 W for LXM15LD21M3, 230 V, three phase 1800 W for LXM05AD34N4 at 10 A, 380...480 V, three phase 1800 W for LXM05BD34N4, 380...480 V, three phase 1800 W for LXM05CD34N4, 380...480 V, three phase 2000 W for LXM15MD28N4, 400 V, three phase 2000 W for LXM15MD40N4, 400 V, three phase 2200 W for LXM15LD17N4, 400 V, three phase 2200 W for LXM15MD28N4, 480 V, three phase 2200 W for LXM15MD40N4, 480 V, three phase 2300 W for LXM15LD17N4, 480 V, three phase

Nominal torque

6.3 N.m for LXM32.D30N4 at 10 A, 400 V, three phase 6.3 N.m for LXM32.D30N4 at 10 A, 480 V, three phase 3.7 N.m for LXM15LD17N4, 480 V, three phase 6.73 N.m for LXM05AD28M2, 200...240 V, single phase 6.73 N.m for LXM05BD28M2, 200...240 V, single phase 6.73 N.m for LXM05CD28M2, 200...240 V, single phase 4.6 N.m for LXM15MD28N4, 480 V, three phase 4.6 N.m for LXM15MD40N4, 480 V, three phase 4.7 N.m for LXM15LD17N4, 400 V, three phase 5 N.m for LXM15MD28N4, 400 V, three phase 5 N.m for LXM15MD40N4, 400 V, three phase 5.7 N.m for LXM05AD34N4 at 10 A, 380...480 V, three phase 5.7 N.m for LXM05BD34N4, 380...480 V, three phase 5.7 N.m for LXM05CD34N4, 380...480 V, three phase 6 N.m for LXM15LD17N4, 230 V, three phase 6 N.m for LXM15LD21M3, 230 V, three phase 6.3 N.m for LXM15LD28M3, 230 V, three phase 6.73 N.m for LXM05AD42M3X, 200...240 V, three phase 6.73 N.m for LXM05BD42M3X, 200...240 V, three phase 6.73 N.m for LXM05CD42M3X, 200...240 V, three phase

Nominal speed

4000 rpm for LXM32.D30N4 at 10 A, 480 V, three phase 4500 rpm for LXM15LD17N4, 400 V, three phase 6000 rpm for LXM15LD17N4, 480 V, three phase 1500 rpm for LXM05AD28M2, 200...240 V, single phase 1500 rpm for LXM05BD28M2, 200...240 V, single phase 1500 rpm for LXM05CD28M2, 200...240 V, single phase 1500 rpm for LXM05AD42M3X, 200...240 V, three phase 1500 rpm for LXM05BD42M3X, 200...240 V, three phase 1500 rpm for LXM05CD42M3X, 200...240 V, three phase 2000 rpm for LXM15LD28M3, 230 V, three phase 2500 rpm for LXM15LD17N4 at 10 A, 230 V, three phase 2500 rpm for LXM15LD21M3, 230 V, three phase 3000 rpm for LXM05AD34N4, 380...480 V, three phase 3000 rpm for LXM05BD34N4, 380...480 V, three phase 3000 rpm for LXM05CD34N4, 380...480 V, three phase 4000 rpm for LXM15MD28N4, 400 V, three phase 4000 rpm for LXM15MD40N4, 400 V, three phase 4500 rpm for LXM15MD28N4, 480 V, three phase 4500 rpm for LXM15MD40N4, 480 V, three phase

3000 rpm for LXM32.D30N4 at 10 A, 400 V, three phase

Product compatibility	LXM05AD28M2 at 200240 V single phase
	LXM05BD28M2 at 200240 V single phase
	LXM05CD28M2 at 200240 V single phase
	LXM15LD21M3 at 230 V three phase
	LXM05AD42M3X at 200240 V three phase
	LXM05BD42M3X at 200240 V three phase
	LXM05CD42M3X at 200240 V three phase
	LXM15LD17N4 at 230 V three phase
	LXM15LD17N4 at 400 V three phase
	LXM15LD17N4 at 480 V three phase
	LXM15LD27744 at 400 V three phase
	LXM05AD34N4 at 380480 V three phase
	·
	LXM05BD34N4 at 380480 V three phase
	LXM05CD34N4 at 380480 V three phase
	LXM15MD28N4 at 400 V three phase
	LXM15MD28N4 at 480 V three phase
	LXM15MD40N4 at 400 V three phase
	LXM15MD40N4 at 480 V three phase
	LXM32.D30N4 at 400 V three phase
	LXM32.D30N4 at 480 V three phase
Shaft end	Untapped
ID downer of muchaetics	UDGG () I I
IP degree of protection	IP50 standard
Speed feedback resolution	131072 points/turn
Holding brake	Without
Mounting support	International standard flange
Electrical connection	Rotatable right-angled connectors
Complementary	
Danna samuakihiliku	l · or
Range compatibility	Lexium 05
	Lexium 32
	Lexium 15
supply voltage max	480 V
Network number of phases	Three phase
Continuous stall current	6.6 A
maximum continuous nowar	2.44.W
maximum continuous power	3.14 W
Maximum current Irms	28.3 A for LXM15LD21M3
	28.3 A for LXM15LD28M3
	28.3 A for LXM15LD17N4
	28.3 A for LXM15MD28N4
	28.3 A for LXM15MD40N4
	28.3 A for LXM05AD28M2
	28.3 A for LXM05AD42M3X
	28.3 A for LXM05AD34N4
	28.3 A for LXM05BD28M2
	28.3 A for LXM05BD42M3X
	28.3 A for LXM05BD34N4
	28.3 A for LXM05CD28M2
	28.3 A for LXM05CD42M3X
	28.3 A for LXM05CD34N4
	28.3 A for LXM32.D30N4
Maximum permanent current	28.3 A
Switching frequency	8 kHz
Second shaft	Without second shaft end
Shaft diameter	19 mm
Shaft length	40 mm
Feedback type	Single turn SinCos Hiperface
- <u></u>	÷
Motor flange size	100 mm
Motor flange size Number of motor stacks	100 mm

Torque constant	1.22 N.m/A at 120 °C
Back emf constant	77 V/krpm at 120 °C
Number of motor poles	4.0
Rotor inertia	3.22 kg.cm²
Stator resistance	1.43 Ohm at 20 °C
Stator inductance	4.7 mH at 20 °C
Stator electrical time constant	6.15 ms at 20 °C
Maximum radial force Fr	1050 N at 1000 rpm 660 N at 4000 rpm 730 N at 3000 rpm 830 N at 2000 rpm
Maximum axial force Fa	0.2 x Fr
type of cooling	Natural convection
Length	240.5 mm
Centring collar diameter	95 mm
centring collar depth	3.5 mm
Number of mounting holes	4
Mounting holes diameter	9 mm
Circle diameter of the mounting holes	115 mm
Net weight	7.4 kg
Sizing reference	BSH1003P
Network number of phases	3
Accuracy error [angular]	1.4°
Temperature copper hot	120 °C
Temperature magnet hot	100 °C
Temperature magnet rt	20 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	21 cm
Package 1 Width	18.2 cm
Package 1 Length	57 cm
Package 1 Weight	8.471 kg
Unit Type of Package 2	P06
Number of Units in Package 2	6
Package 2 Height	77 cm
Package 2 Width	80 cm
Package 2 Length	60 cm
Package 2 Weight	59.326 kg

Logistical informations

Country of origin

Contractual warranty

Warranty

1 Jul 2025

18 months

DE



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

∇ Environmental footprint	
Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	2846
Environmental Disclosure	Product Environmental Profile

Use Better

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration
PVC free	Yes

Use Again


○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

BSH1003P01A2A

Dimensions Drawings

Servo Motors Dimensions

Example with Straight Connectors

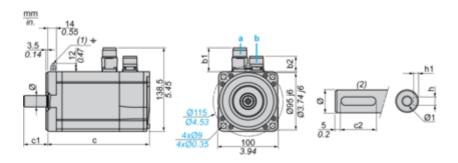

- a: Power supply for servo motor brake
- **b**: Power supply for servo motor encoder
- (1) M4 screw
- (2) Shaft end, keyed slot (optional)

Dimensions in mm

	Straight Rotatable angled connectors connectors		c (without brake)	c (with	c1	c2	h	h1	Ø	Ø1 for	
b1	b2	b1	b2	brake)	brake)						screws
39.5	25.5	39.5	39.5	241	272	40	30	6 N9	3.5 ^{+0.1} ₀	19 k6	M6 x 16

Dimensions in in.

Straight Rotatable angled connectors connectors		c (without c (with brake)	c1	c2	h	h1	Ø	Ø1 for			
b1	b2	b1	b2	brake) br	brake)						screws
1.55	1.00	1.55	1.55	9.48	10.70	1.57	1.18	0.24 N9	0.14 ^{+0.1} 0	0.75 k6	M6 x 0.63

Product datasheet


BSH1003P01A2A

Performance Curves

400 V 3-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30N4 servo drive




- **X** Speed in rpm
- Y Torque in Nm
- 1 Peak torque
- 2 Continuous torque

480 V 3-Phase Supply Voltage

Torque/Speed Curves

Servo motor with LXM32•D30N4 servo drive



- X Speed in rpm
- Y Torque in Nm
 1 Peak torque
- 2 Continuous torque