

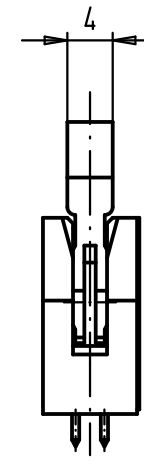


Alle Rechte vorbehalten/ All rights reserved

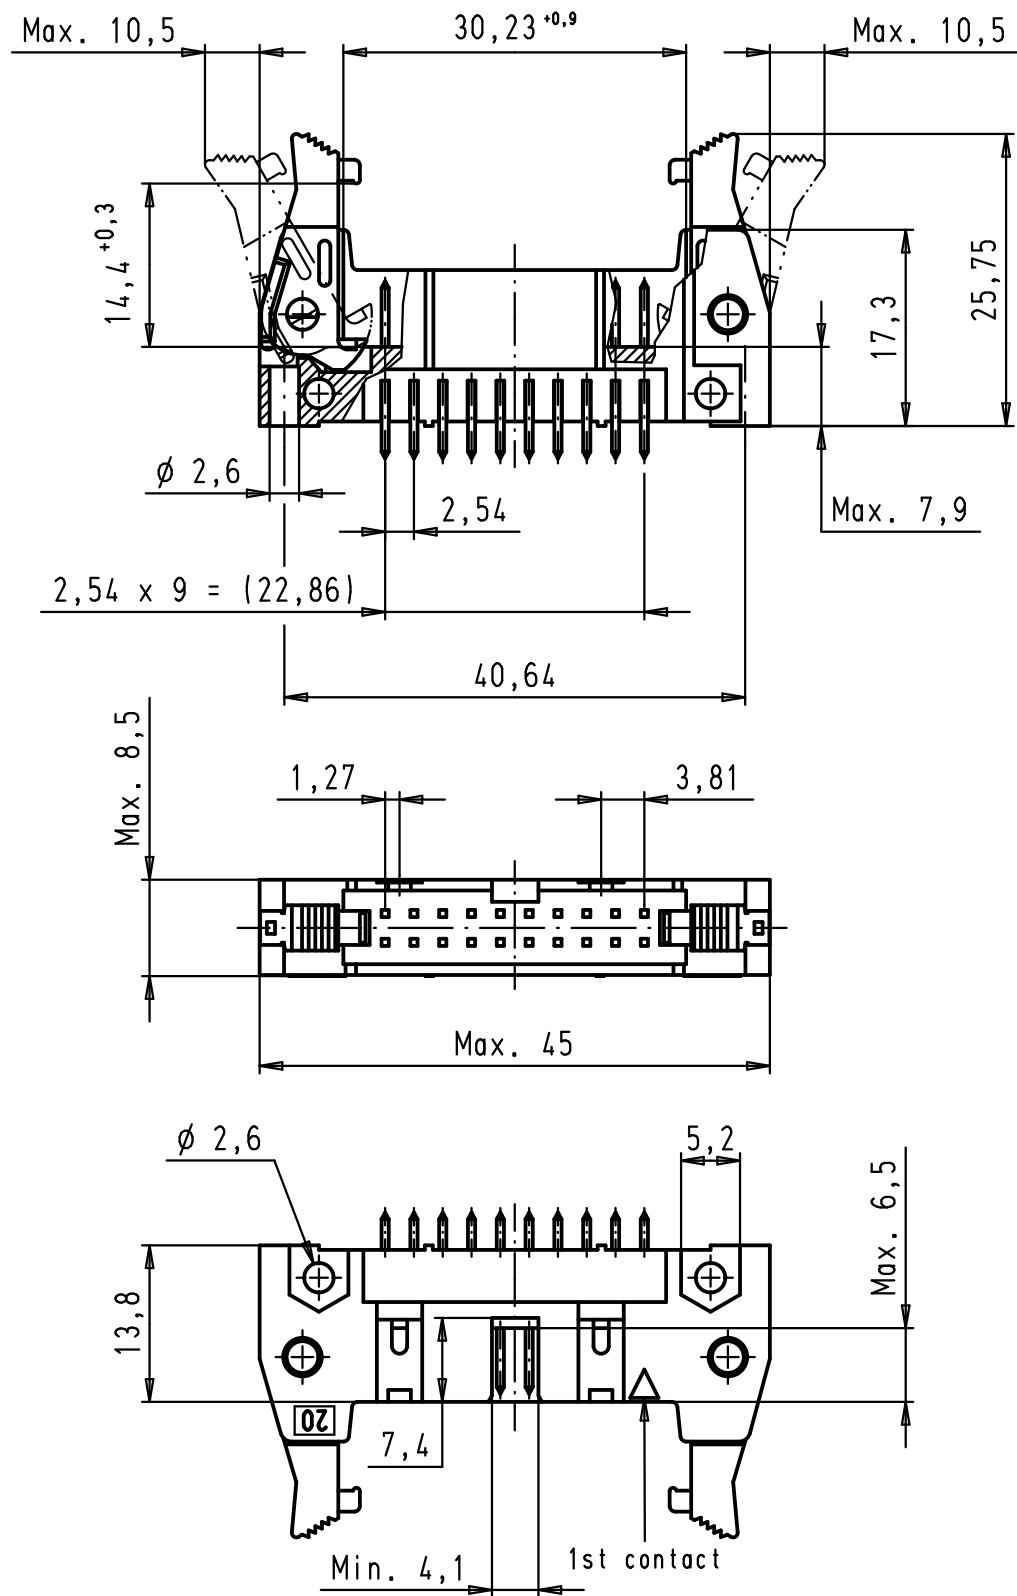

PCB layout, component side

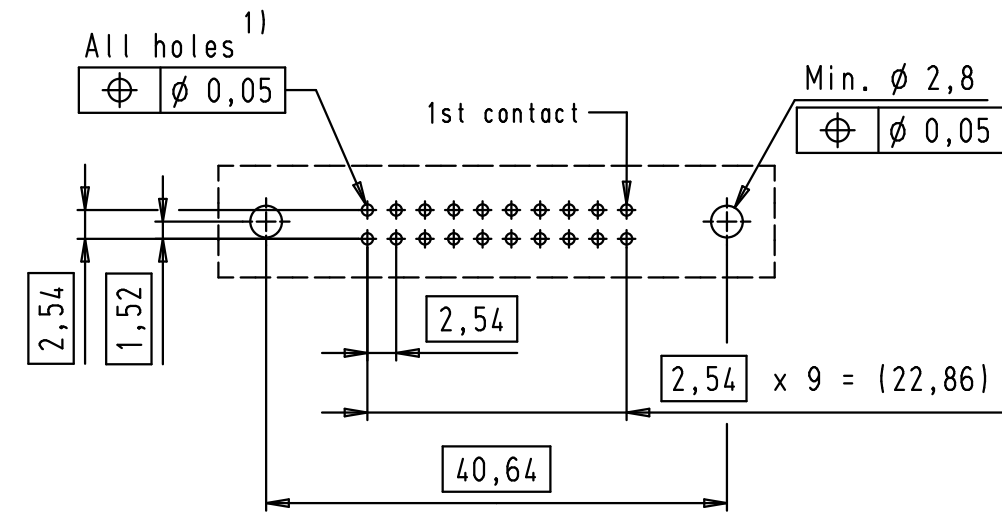

1) Solder pins for PCB connections  $\varnothing 1 \pm 0,1$  according to IEC 60 326-3

09 18 520 7904 601	3	2,9	Black	PA 6.6	600
09 18 520 6904 601	2	2,9	Black	PA 6.6	600
09 18 520 5904 601	0,76 $\mu\text{m Au}$	2,9	Black	PA 6.6	600
09 18 520 7904 001	3	2,9	Black	PBT	200
09 18 520 6904 001	2	2,9	Black	PBT	200
09 18 520 5904 001	0,76 $\mu\text{m Au}$	2,9	Black	PBT	200
09 18 520 7902	3	4,5	Standard	PBT	200
09 18 520 6902	2	4,5	Standard	PBT	200
09 18 520 5902	0,76 $\mu\text{m Au}$	4,5	Standard	PBT	200
09 18 520 7904	3	2,9	Standard	PBT	200
09 18 520 6904	2	2,9	Standard	PBT	200
09 18 520 5904	0,76 $\mu\text{m Au}$	2,9	Standard	PBT	200
Part number	Performance level	a	Insulator color	Plastic material	CTI (V)

EC00995	19/10/09	PK		Det.	Name		SEK 18 Male Connector Standard 20 poles Straight solder pins Long locking levers	Maßstab/ Scale 1,5:1
35318	30/09/08	PK	Detail.	01/12/99	JB			
34900	28/01/08	LP	Insp.			All Dim. in mm Orig. Size DIN A 3	<b>TB 09 18 520 X90X</b>	Blatt/ Page 1/2
33451	30/03/06	JMDR	Stand.					
27931	15/06/00	JB					Sub.	
26554	01/12/99	JB						
Mod.	Det.	Name	HARTING EURL F-95972 Paris					