

Product data sheet

Specifications



Fiber filter for Roof Connected Cooling Unit, Climasys CU, 0,8 - 1,2 - 1,5kW

NSYCUACC011DG

Main

Range	ClimaSys
Product name	ClimaSys CU
Product or component type	Filter
Range compatibility	ClimaSys ClimaSys CU cooling unit
Accessory / separate part category	Thermal management accessory

Complementary

Type of ventilation filter	G3 EN 779
Mounting location	Roof
Product destination	For top-mounting cooling unit - power: 850 W For top-mounting cooling unit - power: 1200 W For top-mounting cooling unit - power: 1500 W For top-mounting cooling unit - power: 2000 W
Accessory / separate part destination	ClimaSys cooling unit
Quantity per set	Set of 5
Material	Polyolefin
Product weight	0.025 kg
Width	580 mm
Height	210 mm
thickness	5 mm

Environment

Flame retardance	K1/F1 conforming to DIN 53 438
------------------	--------------------------------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.100 cm
Package 1 Width	24.500 cm
Package 1 Length	60.000 cm
Package 1 Weight	53.000 g
Unit Type of Package 2	CAR
Number of Units in Package 2	5

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Package 2 Height	5.500 cm
Package 2 Width	24.500 cm
Package 2 Length	60.000 cm
Package 2 Weight	268.000 g
Unit Type of Package 3	PAL
Number of Units in Package 3	50
Package 3 Height	29.000 cm
Package 3 Width	45.000 cm
Package 3 Length	120.000 cm
Package 3 Weight	2.680 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant
REACH Regulation	Free of Substances of Very High Concern above the threshold

Use Longer


Lifetime extension	
Repair	No

Use Again

Repack and remanufacture	
Take-back	No

Technical Illustration

Wiring diagram

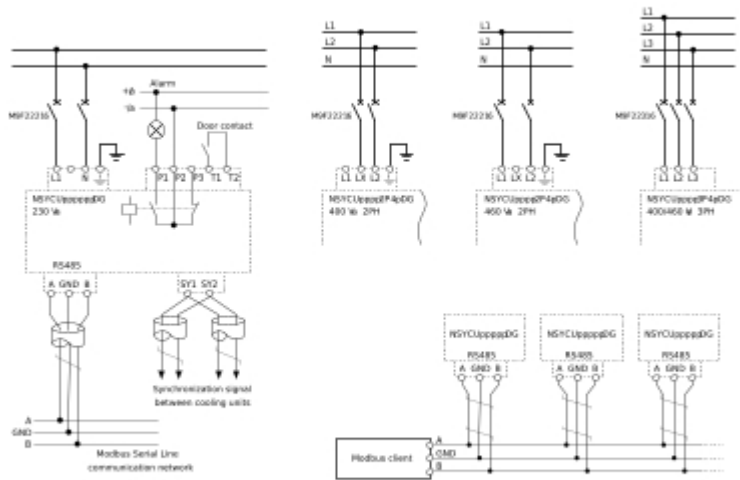

Offer Marketing Illustration

Product benefits / Features

The infographic features a central image of three Schneider Electric NSYCUACC011DG cooling units: a tall rack-mounted unit, a medium-sized unit, and a compact desktop unit. Surrounding this central image are six circular icons, each representing a key product benefit:

- Connected with alarming and setting data:** Represented by a speaker icon with sound waves.
- Easy selection with 40 references IEC & UL:** Represented by an icon showing four checkboxes, all of which are checked.
- 3 redundant modes for critical application:** Represented by an icon showing a hierarchical tree structure with three levels.
- Recycled packaging, good energy efficiency ratio:** Represented by an icon showing a recycling symbol (three chasing arrows) and a leaf.
- 30% Smaller and lighter Cooling Units:** Represented by an icon showing a square with a diagonal line and a smaller square inside.
- Easy mounting with 3 positions, easy spare parts replacement:** Represented by an icon showing a clock face with a checkmark inside.