



# 310 FIXPRESS

## FIXING, BLOCKING RINGS, BEARINGS, AXLES...

FIXATION THREE STRONG

### BENEFITS

- Highly resistant to shocks and vibrations, protects against corrosion. Load distributed over 100% of surfaces.
- Highly resistant to oils, hydrocarbons, cold and hot water, steam, industrial fluids and gases, etc.
- Very difficult to disassemble.
- Excellent stability over time.
- Economical: V-shaped bottle allowing use of 100% resin.
- Ensures a perfect seal if there is enough product between the two assembled parts.



PQ 10053.060/061.03  
EADS – ASNA 4024



### DEFINITION

Anaerobic resin for blocking and fixing rings, bearings, fittings which normally do not need to be dismantled.

### INSTRUCTIONS FOR USE

Ready to use.

Application temperature: +5 to +40°C.

Apply the adhesive so as to fill the gap perfectly, on clean and dry surfaces.

Cleaning with our CLEANER 3141 is recommended.

Assemble the parts and do not handle them during the setting time (the first 10 to 15 minutes).

For faster adhesion (on STAINLESS STEEL, treated metals or when it is cold), use our ACTIVATEUR3140.

ORAPI® cannot be aware of all the applications in which its products are used and the conditions of their use. ORAPI® assumes no responsibility for: the suitability of its products for a given use or for a particular purpose, the application methods over which it has no control. The information contained in this technical data sheet must in no case replace the preliminary tests that must be carried out to verify the suitability of the product for each intended application. The user of the product described in this technical data sheet remains solely responsible for all measures required to protect people and property against all risks that may result from the implementation and/or use of this product. Consequently, ORAPI® disclaims all implied or explicit warranties, including warranties relating to the fitness for sale or suitability for a particular need, resulting from the sale or use of its products. ORAPI® specifically denies any prosecution for incidental or consequential damages of any kind, including financial operating losses.



# 310 FIXPRESS

## FIXING, BLOCKING RINGS, BEARINGS, AXLES...

FIXATION THREE STRONG

### FEATURES

Aspect :	Viscous liquid
Smell :	Green
Operating temperature:	- 60 to +150°C; +230°C excluding vibrations
Viscosity:	1000 to 1500 cPs
Recommended minimum/maximum clearance: 0.15 to 0.25 mm	
Setting time on steel:	3 to 5 minutes
Shear strength:	> 25 N/mm <sup>2</sup>
Complete polymerization:	24 hours
Unlocking torque:	> 30 Nm

### FIELD OF APPLICATION

Maintenance and construction of mechanical assemblies subject to high constraints.  
Unremovable fixing and sealing.

Recommended for fixing RINGS, BEARINGS, PULLEYS... with a clearance of 0.15 to 0.25 mm.

Fixes, brakes, blocks, reinforces all metal assemblies.

### PACKAGING

Flacon 250 ml	ref. 1310F5	x1
Flacon 50 ml	ref. 1310F3	x6








ORAPI® cannot be aware of all the applications in which its products are used and the conditions of their use. ORAPI® assumes no responsibility for: the suitability of its products for a given use or for a particular purpose, the application methods over which it has no control. The information contained in this technical data sheet must in no case replace the preliminary tests that must be carried out to verify the suitability of the product for each intended application. The user of the product described in this technical data sheet remains solely responsible for all measures required to protect people and property against all risks that may result from the implementation and/or use of this product. Consequently, ORAPI® disclaims all implied or explicit warranties, including warranties relating to the fitness for sale or suitability for a particular need, resulting from the sale or use of its products. ORAPI® specifically denies any prosecution for incidental or consequential damages of any kind, including financial operating losses.

# 310 FIXPRESS

## FIXING, BLOCKING RINGS, BEARINGS, AXLES...

FIXATION THREE STRONG

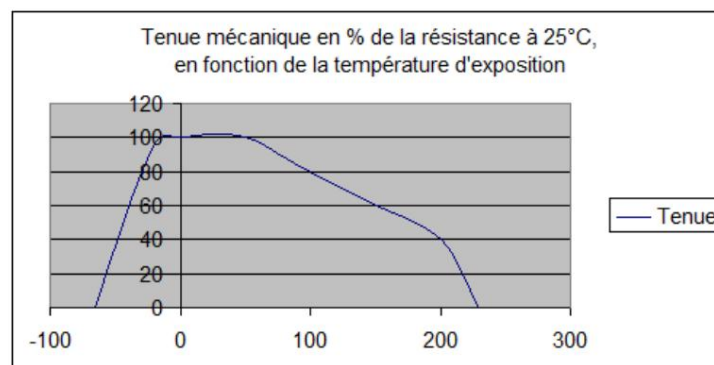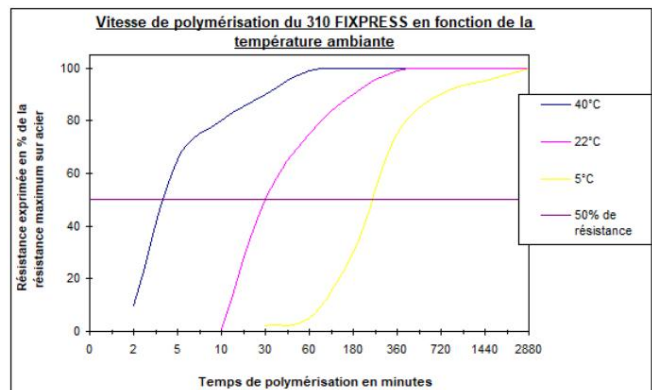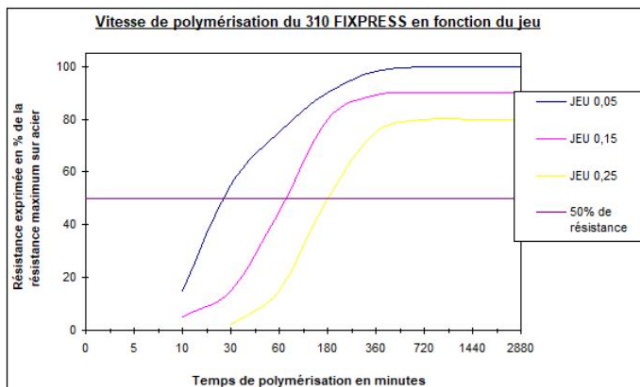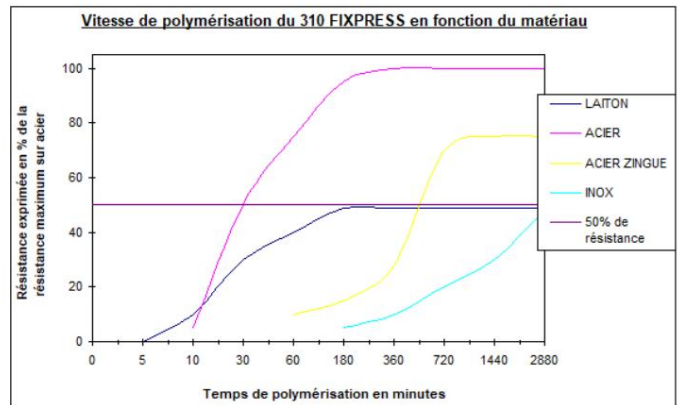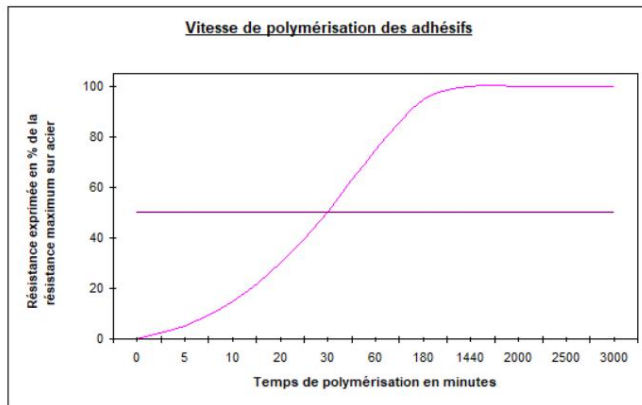

ORAPI® cannot be aware of all the applications in which its products are used and the conditions of their use. ORAPI® assumes no responsibility for: the suitability of its products for a given use or for a particular purpose, the application methods over which it has no control. The information contained in this technical data sheet must in no case replace the preliminary tests that must be carried out to verify the suitability of the product for each intended application. The user of the product described in this technical data sheet remains solely responsible for all measures required to protect people and property against all risks that may result from the implementation and/or use of this product. Consequently, ORAPI® disclaims all implied or explicit warranties, including warranties relating to the fitness for sale or suitability for a particular need, resulting from the sale or use of its products. ORAPI® specifically denies any prosecution for incidental or consequential damages of any kind, including financial operating losses.