



1

STANDARD EXECUTIONS

Pass-through holes for countersunk head screws.



2

- **GN 4490-ZD-A1**: die-cast zinc alloy, normal end-force spring in AISI 301 stainless steel.



3

- **GN 4490-ZD-A2**: die-cast zinc alloy, reinforced end-force spring in AISI 301 stainless steel.



4

Surface finish index:

- **SR**: RAL 9006 grey epoxy resin coating, matte finish.

- **SW**: RAL 9005 black epoxy resin coating, matte finish.



5

- **GN 4490-NI-A1**: AISI 316 LHC stainless steel, normal end-force spring in AISI 316 Ti stainless steel.



6

- **GN 4490-NI-A2**: AISI 316 stainless steel LHC, reinforced end-force spring in AISI 316 Ti stainless steel.



7

BALL CONTAINMENT BODY

Acetal resin based (POM) technopolymer.



8

BALLS

- AISI 304 stainless steel (Type ZD).

- Ceramic, silicon nitride, black colour (Type NI).



9

FEATURES AND APPLICATIONS

GN 4490 ball-shaped door locks are generally used for closing panels and doors that must be opened and closed frequently with ease.

They consist of a jamb body, equipped with balls and springs, and a door body that engages laterally or frontally.

The installation can be oriented as required.



10

SPECIAL EXECUTION ON REQUEST

Epoxy resin coatings in various colours.



11



12



13



14



15



16



17



18




19




20



21

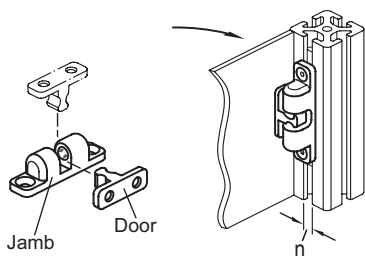

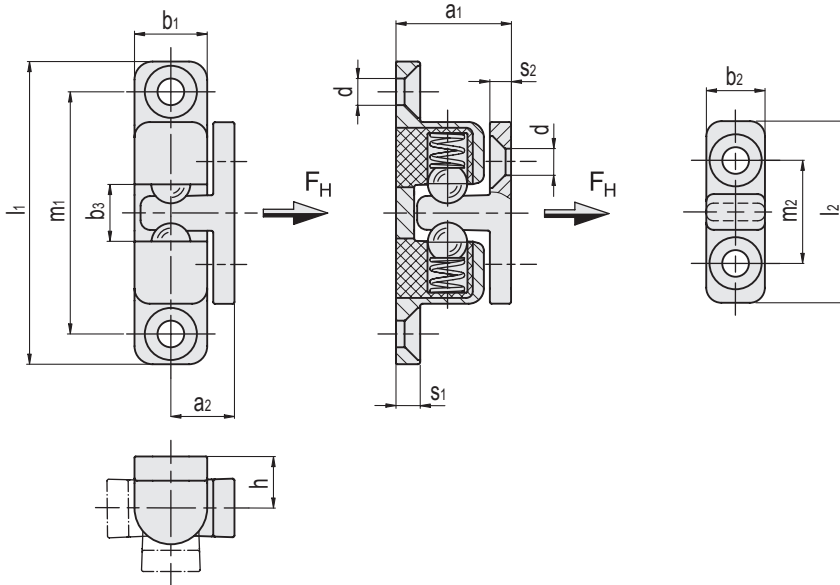

GN 4490-ZD-A1

Code	Description	l1	l2	a1	a2	b1	b2	b3	d	h	m1	m2	s1	s2	n	FH* [N]	🔒
GN.22803	GN 4490-ZD-38-A1-AG-SW	38	21	15	7.5	8	7	4.3	3.5	7.5	30	12	4	2.5	≤ 4.5	25	12
GN.22811	GN 4490-ZD-50-A1-AG-SW	50	30	20	10.5	12	10	6.5	4.5	9.5	40	17	5	3.5	≤ 6	40	29
GN.22819	GN 4490-ZD-68-A1-AG-SW	68	32.5	23	12	14.5	11	9.5	4.5	11	55	20	5	3.5	≤ 8	75	56
GN.22827	GN 4490-ZD-80-A1-AG-SW	80	40	27	14	16.5	13	11	5.5	13	65	25	6	4	≤ 10	125	88
GN.22801	GN 4490-ZD-38-A1-AG-SR	38	21	15	7.5	8	7	4.3	3.5	7.5	30	12	4	2.5	≤ 4.5	25	12
GN.22809	GN 4490-ZD-50-A1-AG-SR	50	30	20	10.5	12	10	6.5	4.5	9.5	40	17	5	3.5	≤ 6	40	31
GN.22817	GN 4490-ZD-68-A1-AG-SR	68	32.5	23	12	14.5	11	9.5	4.5	11	55	20	5	3.5	≤ 8	75	56
GN.22825	GN 4490-ZD-80-A1-AG-SR	80	40	27	14	16.5	13	11	5.5	13	65	25	6	4	≤ 10	125	88

GN 4490-ZD-A2

Code	Description	l1	l2	a1	a2	b1	b2	b3	d	h	m1	m2	s1	s2	n	FH* [N]	🔒
GN.22807	GN 4490-ZD-38-A2-AG-SW	38	21	15	7.5	8	7	4.3	3.5	7.5	30	12	4	2.5	≤ 4.5	35	12
GN.22815	GN 4490-ZD-50-A2-AG-SW	50	30	20	10.5	12	10	6.5	4.5	9.5	40	17	5	3.5	≤ 6	70	31
GN.22823	GN 4490-ZD-68-A2-AG-SW	68	32.5	23	12	14.5	11	9.5	4.5	11	55	20	5	3.5	≤ 8	100	56
GN.22831	GN 4490-ZD-80-A2-AG-SW	80	40	27	14	16.5	13	11	5.5	13	65	25	6	4	≤ 10	150	80
GN.22805	GN 4490-ZD-38-A2-AG-SR	38	21	15	7.5	8	7	4.3	3.5	7.5	30	12	4	2.5	≤ 4.5	35	12
GN.22813	GN 4490-ZD-50-A2-AG-SR	50	30	20	10.5	12	10	6.5	4.5	9.5	40	17	5	3.5	≤ 6	70	31
GN.22821	GN 4490-ZD-68-A2-AG-SR	68	32.5	23	12	14.5	11	9.5	4.5	11	55	20	5	3.5	≤ 8	100	56
GN.22829	GN 4490-ZD-80-A2-AG-SR	80	40	27	14	16.5	13	11	5.5	13	65	25	6	4	≤ 10	150	80

GN 4490-NI-A1



Code	Description	l1	l2	a1	a2	b1	b2	b3	d	h	m1	m2	s1	s2	n	FH* [N]	🔒
GN.22784	GN 4490-NI-38-A1-AG-GS	38	21	15	7.5	8	7	4.3	3.5	7.5	30	12	4	2.5	≤ 4.5	25	15
GN.22786	GN 4490-NI-50-A1-AG-GS	50	30	20	10.5	12	10	6.5	4.5	9.5	40	17	5	3.5	≤ 6	40	36
GN.22788	GN 4490-NI-68-A1-AG-GS	68	32.5	23	12	14.5	11	9.5	4.5	11	55	20	5	3.5	≤ 8	75	64
GN.22790	GN 4490-NI-80-A1-AG-GS	80	40	27	14	16.5	13	11	5.5	13	65	25	6	4	≤ 10	125	100

GN 4490-NI-A2



Code	Description	l1	l2	a1	a2	b1	b2	b3	d	h	m1	m2	s1	s2	n	FH* [N]	🔒
GN.22785	GN 4490-NI-38-A2-AG-GS	38	21	15	7.5	8	7	4.3	3.5	7.5	30	12	4	2.5	≤ 4.5	35	15
GN.22787	GN 4490-NI-50-A2-AG-GS	50	30	20	10.5	12	10	6.5	4.5	9.5	40	17	5	3.5	≤ 6	70	36
GN.22789	GN 4490-NI-68-A2-AG-GS	68	32.5	23	12	14.5	11	9.5	4.5	11	55	20	5	3.5	≤ 8	100	64
GN.22791	GN 4490-NI-80-A2-AG-GS	80	40	27	14	16.5	13	11	5.5	13	65	25	6	4	≤ 10	150	100

*Holding force

