

# **Features**

#### **RG Series**

- 4-row recirculating roller bearing guide
- 45° contact angle of the ball tracks
- Recirculation roller guide
- Very high load capacity
- Very high rigidity

## **RS PRO Linear Guide Rails**

RS Stock No.: 0345472



RS PRO is the own brand of RS. The RS PRO Seal of Approval is your assurance of professional quality, a guarantee that every part is rigorously tested, inspected, and audited against demanding standards. Making RS PRO the Smart Choice for our customers.

Product Description Page 1 of 3

## **Linear Guide Rails**



#### **Features of RG Series:**

The RG series features a roller as the rolling element instead of steel balls. The roller series
offers super high rigidity and very high load capacities. The RG series is designed with a 45degree contact angle. Elastic deformation of the linear contact surface, during load, is
greatly reduced thereby offering greater rigidity and higher load capacities in all 4 load
directions. The RG series linear guideway offers high performance for high-precision
manufacturing and achieving longer service life.

#### **Advantages:**

- Free of play
- Replaceable
- High precision
- Very high load capacity
- Low displacement force also with high preload

#### **Typical Applications:**

- Automation Systems
- Transportation equipment
- CNC machining centres
- Heavy duty cutting machines.
- CNC grinding machines.
- Injection moulding machines
- Plano millers
- Devices requiring high rigidity.
- Devices requiring high load capacity.
- Electric discharge machines

### **General Specifications**


Manufacturer Series	RG
Model Type	RGR-T
Туре	Interchangeable
Block Mounting Type	Mounting From Bottom
Rail Length	600mm
Rail Width	28mm
Materials	Carbon Steel
Size	30mm
Accuracy Class	H - High

# **Linear Guide Rails**



### Construction

### Construction of RG Series

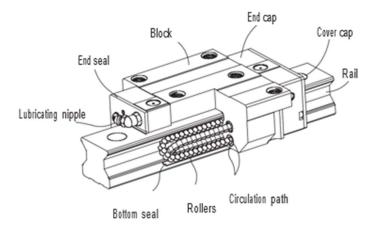

- 4-row recirculation roller bearing
- 45° contact angle
- The roller retainers prevent the rollers from falling out when the carriage is removed
- Different sealing variants, depending on application area
- Six connection options for grease nipples or grease adapters

<sup>\*\*\*</sup> Please see our complete RS PRO RG Series product guide for detailed specifications