


FEATURES

- **Material Composition:** Constructed from Fluorinated Ethylene Propylene, Fluoroelastomer, and Viton for enhanced chemical resistance
- **Temperature Range:** Operates effectively from -20 °C to 140 °C, suitable for diverse environments
- **Hardness:** Shore A 90 to 95 provides optimal flexibility and sealing capability
- **Size Specifications:** Inside diameter of 29.75 mm and outside diameter of 36.81 mm ensures a precise fit
- **Compliance:** Meets standards such as BS ISO 3601-1, AS 568, and FDA, ensuring quality and safety

RS PRO 29.75 mm O-Ring Seal, Shore A 90 to 95

RS Stock No: 731-715

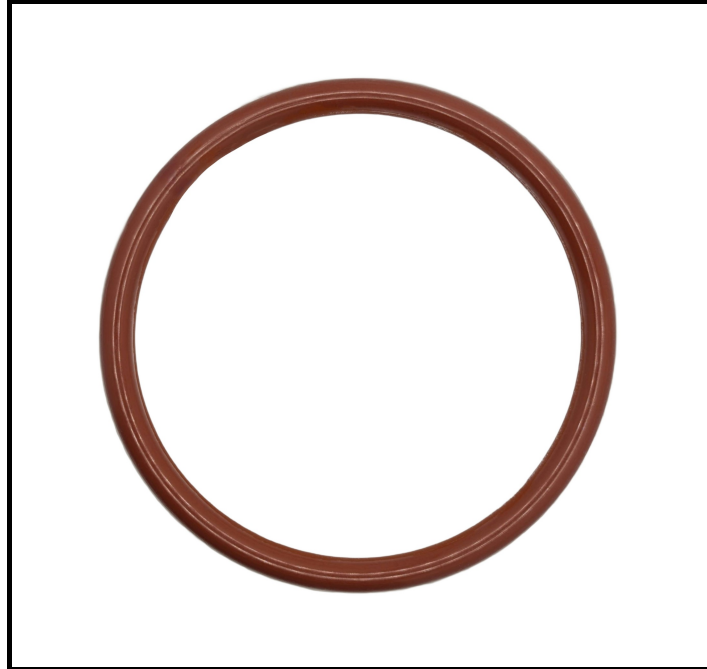

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

This RS PRO O-Ring Seal is designed for reliable sealing in various industrial applications. Made from high-quality materials such as Fluorinated Ethylene Propylene, Fluoroelastomer, and Viton, it offers excellent resistance to chemicals and high temperatures. Ideal for use in environments requiring robust sealing solutions, this O-Ring ensures durability and performance.

General Specifications

Colour	Black
Hardness	Shore A 90 to 95
Product Type	O-Ring Seal
Sub Type	O-Ring

Mechanical Specifications

Inside Diameter	29.75 mm
Material	Fluorinated Ethylene Propylene, Fluoroelastomer, Viton
Outside Diameter	36.81 mm
Thickness	3.53 mm

Operation Environment Specifications

Maximum Operating Temperature	140 °C
Minimum Operating Temperature	-20 °C

Approvals

Standards/Approvals	BS ISO 3601-1, AS 568, EC 1935:2004, FDA, ISO 14001:2015, ISO 45001:2015, ISO 9001:2015, LABS, TSCA, USP Class VI, WRAS
---------------------	-------------------------------------------------------------------------------------------------------------------------

