



Image may differ from product. See technical specification for details.

TSN 606 A

V-ring seal

V-ring seals consist of a V-ring and a sheet steel sealing washer with a vulcanized rubber lip. The rubber lip fits into the seal groove in the housing. The washer is protected against corrosion. The seals are used to protect bearings from contamination or as secondary seals to protect primary seals in highly contaminated environments. They are a cost-effective and easy to install contaminant barrier for all kind of shafts. They are available in nitrile rubber. When ordering, please note that one item (seal pack) contains two seals.

- Easy to install
- Many variants
- Cost-effective

Overview

Dimensions

Shaft diameter	0.9843 in
Housing groove diameter	2.1457 in
Width	0.2854 in

Properties

Accessory type	Housing seal
Sealing type	V-ring
Material	Nitrile rubber with steel element


Logistics

Product net weight	0.093 lb
eClass code	23-05-17-90
UNSPSC code	31171519

Technical specification

Material

Nitrile rubber with steel element

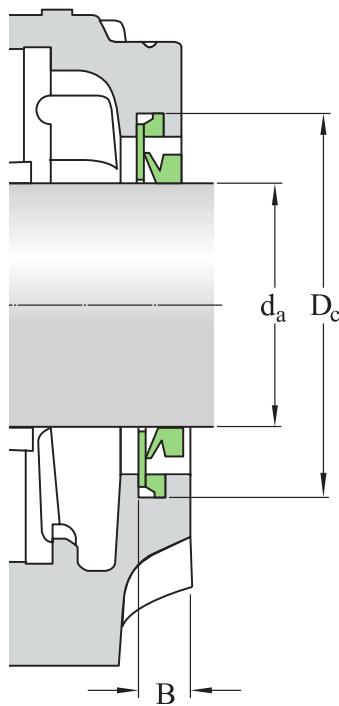

Dimensions

d_a	0.9843 in	Shaft diameter
D_c	2.1457 in	Diameter of seal groove
B	0.2854 in	Width



Terms of use