Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Bailey

Supplier's address: Yvo Hendriks, Everdenberg 21, 4902TT, Oosterhout, The Netherlands

Model identifier: 145056

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	350 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	5,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	97
Outer dimensions without separate control gear, lighting control — Height	52	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
Outer dimensions without separate control gear, lighting control — Width	50		
Outer dimensions without separate control gear, lighting control — Depth	50		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[a]		Yes	If yes, equivalent power (W)	50
			Chromaticity coordinates (x and y)	0,453 0,401
Parameters for directional light sources:				
Peak luminous intensity (cd)		700	Beam angle in degrees, or the range of beam angles that can be set	36
Parameters for LED and OLED light sources:				
R9 colour rendering index value		85	Survival factor	0,90
the lumen maintenance factor		0,96		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,70	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[b]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,4	Stroboscopic effect metric (SVM)	0,4

[a] '-' : not applicable;

[b] '-' : not applicable;

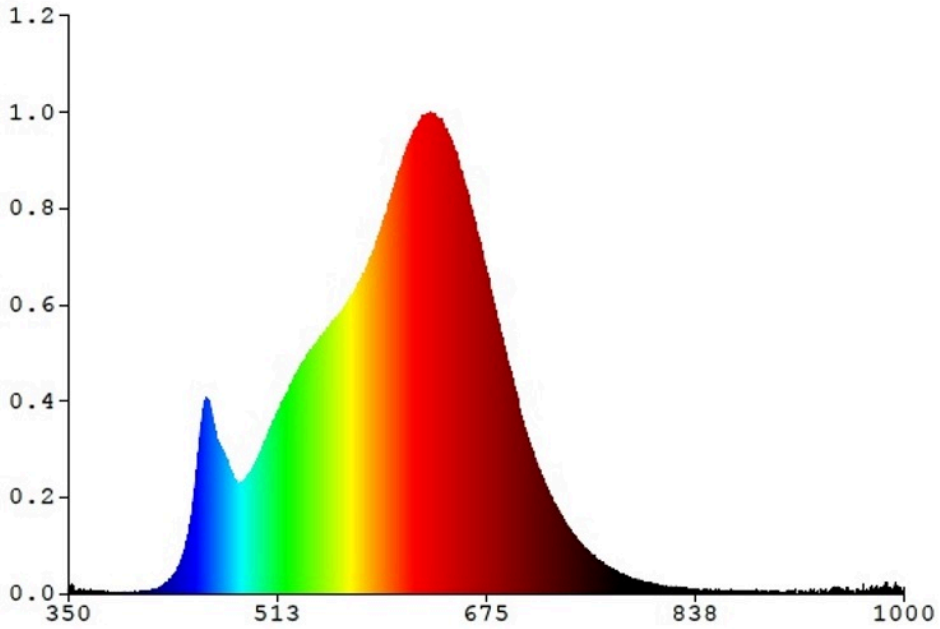
1.2
1.0
0.8
0.6
0.4
0.2
0.0
350
513
675
838
1000

Model placed on the Union market from 01/12/2021

EPREL registration number: 1056360	https://eprel.ec.europa.eu/qr/1056360
Supplier: Bailey, Electric & Electronics B.V. (Manufacturer)	**Website:** www.bailey.nl
Customer care service:	
Name: Yvo Hendriks	**Website:**
Email: purchase@bailey.nl	**Phone:** +31162472091
Address: Everdenberg 21, 4902TT, Oosterhout, The Netherlands	