



**Data Sheet | Item Number: 261-112/341-000**  
2-conductor terminal strip; on both sides with push-buttons; with fixing flanges; 12-  
pole; for screw or similar mounting types; Fixing hole 3.2 mm Ø; 2.5 mm²; CAGE  
CLAMP®; 2,50 mm²; gray  
<https://www.wago.com/261-112/341-000>

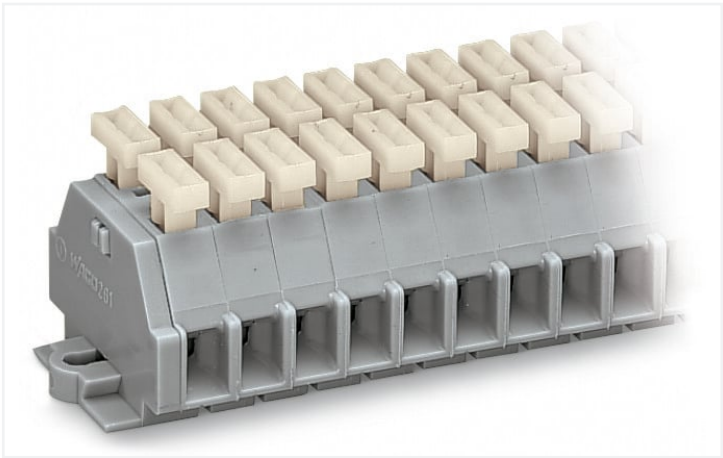

Color: ■ gray

Similar to illustration

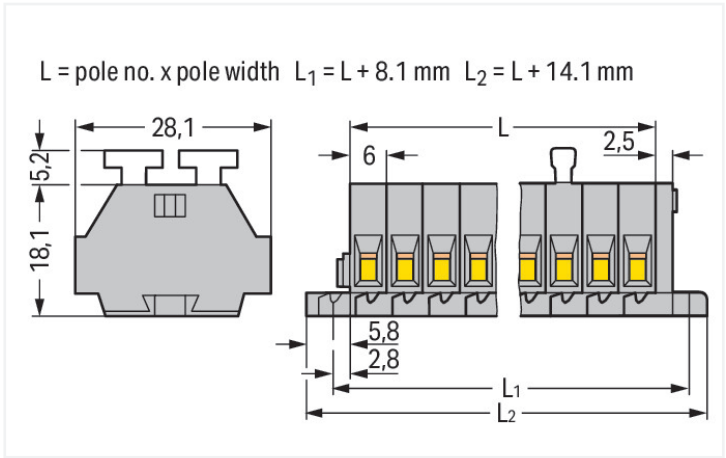

Dimensions in mm

**Electrical data**

Ratings per IEC/EN	
Nominal voltage (III/3)	500 V
Rated impulse voltage (III/3)	6 kV
Rated current	24 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

**Connection data**

Connection points	24
Total number of potentials	12
Number of levels	1

Connection 1	
Connection technology	CAGE CLAMP®
Actuation type	Push-button
Connectable conductor materials	Copper
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Pole number	12
Wiring direction	Side-entry wiring

**Physical data**

Width	86.1 mm / 3.39 inches
Height from the surface	23.3 mm / 0.917 inches
Depth	28.1 mm / 1.106 inches
Module width	6 mm / 0.236 inches




Mechanical data	
Design	horizontal type
Mounting type	Mounting flange
Marking level	Side marking

Material data	
Note (material data)	<a href="_blank">Information on material specifications can be found here</a>
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.825 MJ
Halogen-free	Yes
Weight	32.2 g


Commercial data	
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918619035
Customs tariff number	85369010000

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals		Declarations of conformity and manufacturer's declarations	
			
Approval	Standard	Certificate Name	
CCA DEKRA Certification B.V.	EN 60998	NTR-NL 6509	EU-Declaration of Confor- mity WAGO GmbH & Co. KG
CCA DEKRA Certification B.V.	EN 60998	2110272.02	UK-Declaration of Confor- mity WAGO GmbH & Co. KG

Approvals for marine applications

		
Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	19-HG1869868-PDA



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance  
261-112/341-000

↓

Documentation

Additional Information

Technical Sectionpdf  
2142.18 KB

↓

Bid Text

261-112/341-00019.02.2019xml  
3.17 KB

↓

261-112/341-00017.08.2017doc  
25.50 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models  
261-112/341-000

↓

CAE data

EPLAN Data Portal  
261-112/341-000

↓

WSCAD Universe  
261-112/341-000

↓

ZUKEN Portal  
261-112/341-000


↓

1 Compatible Products


1.1 Optional Accessories

1.1.1 Ferrule


1.1.1.1 Ferrule




**Item No.: 216-301**  
Ferrule; Sleeve for 0.25 mm² / AWG 24; in-  
sulated; electro-tin plated; yellow




**Item No.: 216-321**  
Ferrule; Sleeve for 0.25 mm² / AWG 24; in-  
sulated; electro-tin plated; yellow




**Item No.: 216-151**  
Ferrule; Sleeve for 0.25 mm² / AWG 24;  
uninsulated; electro-tin plated




**Item No.: 216-131**  
Ferrule; Sleeve for 0.25 mm² / AWG 24;  
uninsulated; electro-tin plated; silver-co-  
lored




**Item No.: 216-302**  
Ferrule; Sleeve for 0.34 mm² / 22 AWG; in-  
sulated; electro-tin plated; light turquoise




**Item No.: 216-322**  
Ferrule; Sleeve for 0.34 mm² / 22 AWG; in-  
sulated; electro-tin plated; light turquoise




**Item No.: 216-132**  
Ferrule; Sleeve for 0.34 mm² / AWG 24;  
uninsulated; electro-tin plated




**Item No.: 216-152**  
Ferrule; Sleeve for 0.34 mm² / AWG 24;  
uninsulated; electro-tin plated




**Item No.: 216-201**  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; in-  
sulated; electro-tin plated; white



**Item No.: 216-221**  
Ferrule; Sleeve for 0.5 mm² / 20 AWG; in-  
sulated; electro-tin plated; white


















**Item No.: 216-101**  
Ferrule; Sleeve for 0.5 mm² / AWG 22; un-  
insulated; electro-tin plated; silver-co-  
lored



**Item No.: 216-121**  
Ferrule; Sleeve for 0.5 mm² / AWG 22; un-  
insulated; electro-tin plated; silver-co-  
lored





1.1.1.1 Ferrule

 <b>Item No.: 216-202</b> Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray	 <b>Item No.: 216-222</b> Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray	 <b>Item No.: 216-102</b> Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored	 <b>Item No.: 216-122</b> Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored
 <b>Item No.: 216-203</b> Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red	 <b>Item No.: 216-223</b> Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red	 <b>Item No.: 216-103</b> Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated	 <b>Item No.: 216-123</b> Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; silver-colored
 <b>Item No.: 216-204</b> Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black	 <b>Item No.: 216-224</b> Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black	 <b>Item No.: 216-124</b> Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated	 <b>Item No.: 216-104</b> Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; silver-colored
 <b>Item No.: 216-205</b> Ferrule; Sleeve for 2.08 mm² / AWG 14; insulated; electro-tin plated; yellow	 <b>Item No.: 216-206</b> Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; blue	 <b>Item No.: 216-106</b> Ferrule; Sleeve for 2.5 mm² / AWG 14; uninsulated; electro-tin plated; silver-colored	


1.1.2 Installation

1.1.2.1 Mounting accessories

 <b>Item No.: 209-137</b> Mounting adapter; can be used as end stop; 6.5 mm wide; gray	 <b>Item No.: 209-123</b> Mounting foot with screw; can be screwed on terminal blocks with fixing flange; 6.4 mm wide; gray
---	--

1.1.3 Jumper

1.1.3.1 Jumper

 <b>Item No.: 261-402</b> Jumper; for conductor entry; 2-way; insulated; gray
--

1.1.4 Marking

1.1.4.1 Marking strip

 <b>Item No.: 210-833</b> Marking strips; 25 m on roll; 6 mm wide; plain; Self-adhesive; white
---

1.1.5 Tool

1.1.5.1 Operating tool




**Item No.: 210-658**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; angled; short; multicoloured

**Item No.: 210-720**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured


**Item No.: 210-657**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured

Installation Notes

Conductor termination




CAGE CLAMP® connection  
Inserting a conductor.  
With ferruled conductors, it is necessary to use a terminal block one size larger than the conductor's nominal cross-section.




CAGE CLAMP® connection  
Inserting a conductor via push-button.

Commoning




Commoning with comb-style jumper bar.


Installation



Mounting and securing a terminal strip directly to the plate via screw-type flanges.



Terminal strip with mounting flanges  
Screwing a mounting foot (209-123).  
(Distance between mounting feet: approx. 25 ... 30 mm)



Terminal strip; with mounting flanges; for DIN-35 rail



Terminal strip with mounting flanges, for screw or similar mounting types, 3.2 mm mounting hole diameter (with 209-123 Mounting Foot also for DIN-35 rail)

Marking



Marking with self-adhesive marking strips.



Marking by direct printing (upon request).