

Z-PACK | Z-PACK 2mm HM

TE Internal #: 2170864-1

Hard Metric Backplane PCB Mount Receptacle, 1 Gb/s, 19 Column,

5 Row, Traditional Backplane, 95 Position, 2 mm [.079 in]

Centerline, Z-PACK 2mm HM


View on TE.com >



Connectors > PCB Connectors > Backplane Connectors > Hard Metric Backplane Connectors





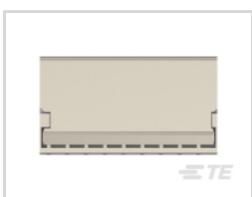





PCB Connector Type: PCB Mount Receptacle

Data Rate: 1 Gb/s

Number of Columns: 19

Number of Rows: 5

Backplane Architecture: Traditional Backplane

Features

Product Type Features

| Connector & Contact Terminates To | Printed Circuit Board |
|-----------------------------------|-----------------------|
| Connector System | Board-to-Board |
| PCB Connector Type | PCB Mount Receptacle |
| Sealable | No |
| Configuration Features | |
| Number of Columns | 19 |
| Number of Rows | 5 |
| Backplane Architecture | Traditional Backplane |
| Number of Positions | 95 |
| PCB Mount Orientation | Right Angle |
| Signal Characteristics | |
| Data Rate | 1 Gb/s |

Gray

Body Features

Primary Product Color



| Contact Features | |
|--|----------------------------|
| Contact Underplating Material | Nickel |
| Contact Base Material | Phosphor Bronze |
| CompactPCI Designation | None |
| Contact Mating Area Plating Material | Gold (Au) |
| Contact Mating Area Plating Material Thickness | .076 μm[2.99 μin] |
| Contact Current Rating (Max) | 1.5 A |
| Mechanical Attachment | |
| Connector Mounting Type | Board Mount |
| Housing Features | |
| Housing Material | Glass-Filled Polyester |
| Centerline (Pitch) | 2 mm[.079 in] |
| Usage Conditions | |
| Operating Temperature Range | -55 – 125 °C[-67 – 257 °F] |
| Operation/Application | |
| Circuit Application | Signal |
| Industry Standards | |
| UL Flammability Rating | UL 94V-0 |
| Packaging Features | |

Product Compliance

Packaging Quantity

Packaging Method

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Not Compliant |
|---|---|
| EU ELV Directive 2000/53/EC | Compliant with Exemptions |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (13% in 4690948374) Article Safe Usage Statements: |

14

Tube



Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

| Halogen Content | Not Low Halogen - contains Br or Cl > 900 |
|-----------------|---|
| | ppm. |

Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | Z-PACK 2mm HM

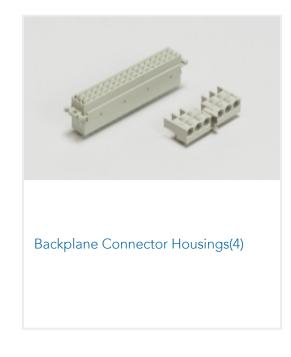

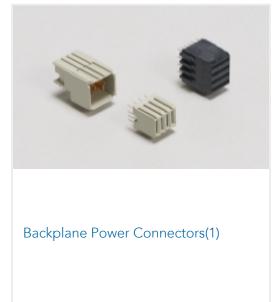




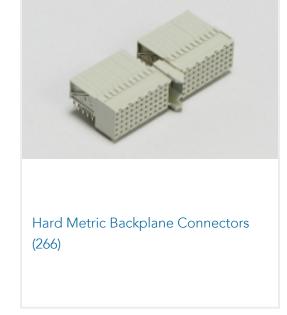





Insertion & Extraction Tools(2)

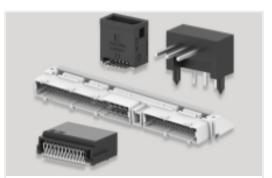

PCB Headers & Receptacles(46)



Rectangular Power Connectors(46)

Customers Also Bought















Documents

Product Drawings

Z-PACK/B F-HDR. 95P, EON

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2170864-1_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2170864-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2170864-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Hard Metric Backplane PCB Mount Receptacle, 1 Gb/s, 19 Column, 5 Row, Traditional Backplane, 95 Position, 2 mm [.079 in] Centerline, Z-PACK 2mm HM



Product Specifications
Product Specification

English