

DATASHEET

ITEM: 35227

WHEEL AS 200X50/60 CRX SPG X20

WHEEL SERIE

Wheels with cast soft polyurethane coating 87 Sh.A on polyamide 6 center.

Wheel fitted with stainless steel roller bearing.

FORK DESCRIPTION

Inox20 series, polished stainless steel forks, swivels with double ball races.




TECHNICAL DETAILS

| | | |
|----------------------------|-------|------------|
| Wheel diameter | (D) | 200 mm |
| Tyre width | (E) | 50 mm |
| Bore diameter | (d) | 20 mm |
| Reference weight | | 2,526 kg |
| Overall height | (H) | 240 mm |
| Top plate outer dimensions | (AxB) | 135x110 mm |
| Bolt hole spacing | (axb) | 105x75 mm |
| Bolt hole spacing | (axb) | 105x80 mm |
| Fixing bolt diameter | (g) | 10 mm |
| Offset | (F) | 59 mm |
| Fork width | (U) | 60 mm |
| Load capacity | | 370 kg |

Possible options :

| | |
|-------------------|--------|
| Wheel replacement | 35081X |
| Brake | FR |

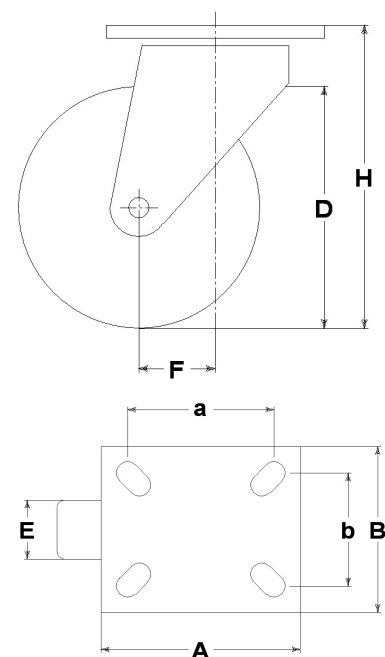

GENERAL INFORMATION / RECOMMENDATIONS AND WARNINGS

The cited text and the complete catalogue in their most up-dated versions are available in our web-site www.lagspa.eu/web/downloads. The dimensions, descriptions, specifications and illustrations herein are indicative and subject to variations without notice. The fact that products are illustrated herein does not necessarily imply they are available from stock nor does it place us under any obligation to supply them. Tests carried out refer to the original products with original accessories: the replacement of one of the components with others of different manufacture might prevent the same results from being achieved and will automatically invalidate any guarantee. Please contact our technical service concerning any special application.