

**Ordering number FP13025\_LISA2-W-PIN**

Family	Lisa2	FWHM	32 degrees
Type	Assembly	Efficiency	84 %
LED	XT-E	cd/lm	2.200
Color	Black	Gerber File	Available
Diameter	9.9 mm		
Height	6.8 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Pin, glue		
Status	Ready		

**Ordering number FP13031\_LISA2-W-CLIP**

Family	Lisa2	FWHM	32 degrees
Type	Assembly	Efficiency	84 %
LED	XT-E	cd/lm	2.200
Color	Black	Gerber File	Available
Diameter	9.9 mm		
Height	6.8 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Clips, glue		
Status	Ready		

**Ordering number FP13026\_LISA2-WW-PIN**

Family	Lisa2	FWHM	47 degrees
Type	Assembly	Efficiency	84 %
LED	XT-E	cd/lm	1.100
Color	Black	Gerber File	Available
Diameter	9.9 mm		
Height	6.8 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Pin, glue		
Status	Ready		

**Ordering number FP13029\_LISA2-WW-CLIP**

Family	Lisa2	FWHM	47 degrees
Type	Assembly	Efficiency	84 %
LED	XT-E	cd/lm	1.100
Color	Black	Gerber File	Available
Diameter	9.9 mm		
Height	6.8 mm		
Style	Round		
Optic Material	PMMA		
Holder Material	PC		
Fastening	Clips, glue		
Status	Ready		



## PRODUCT DATASHEET

### Lisa2 series

last update 7/9/2012

**NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.**



## PRODUCT DATASHEET

### Lisa2 series

last update 7/9/2012

#### GENERAL INFORMATION

- Product series especially designed & optimized for XT-E series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Lens material optical grade PMMA with high UV and temperature resistance. Allows use of high current and temperature conditions.

Please find more information about used material from below:

[http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20UL94\\_Yellow%20Card.pdf](http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20UL94_Yellow%20Card.pdf)

<http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%20N%20PLEXIGLAS-Datasheet.pdf>

- Optic holder molded by high quality PC material (120 degrees of Celcius / 248 degrees of Fahrenheit).

D

C

B

A

4

4

3



3

2


2

1


1

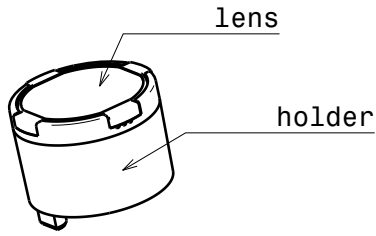

Isometric view  
Scale: 2:1

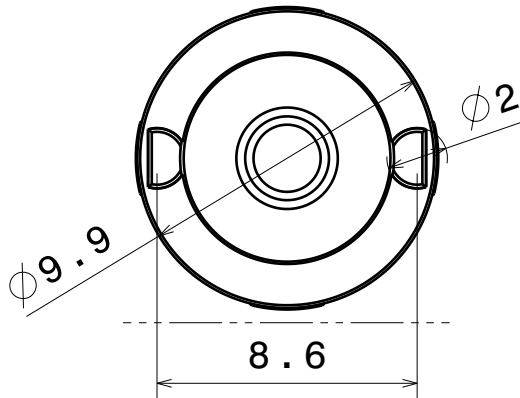

Bottom view

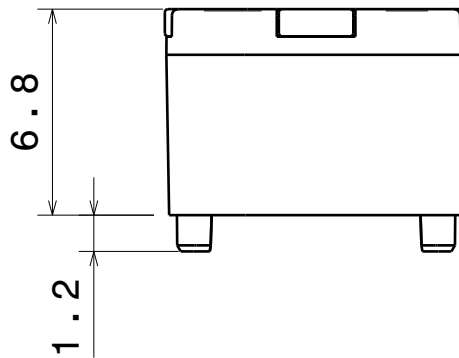

Front view

Materials:  
Lens PMMA  
Holder PC

This drawing is our property.  
It can't be reproduced  
or communicated without  
our written agreement.



Ledil Oy  
Salorankatu 10  
FIN-24240 SALO  
Finland

DRAWING TITLE


Datasheet Lisa2-Pin-XT Series Assy

DRAWN BY pl	DATE 20.06.2012	DRAWING TITLE Datasheet Lisa2-Pin-XT Series Assy		
CHECKED BY	DATE	SIZE A4	DRAWING NUMBER	REV 1
DESIGNED BY pl	DATE 20.06.2012	SCALE 4:1	WEIGHT (g)	SHEET 1/1


D

A


Luminaire: LEDIL OY FP13025\_LISA2-W-PIN & FP13031\_LISA2-W-CLIP-XTE (Cree XT-E 98lm @ 250mA) Efficiency=84%  
Lamps: 1 x CREE XT-E (98.9lm)

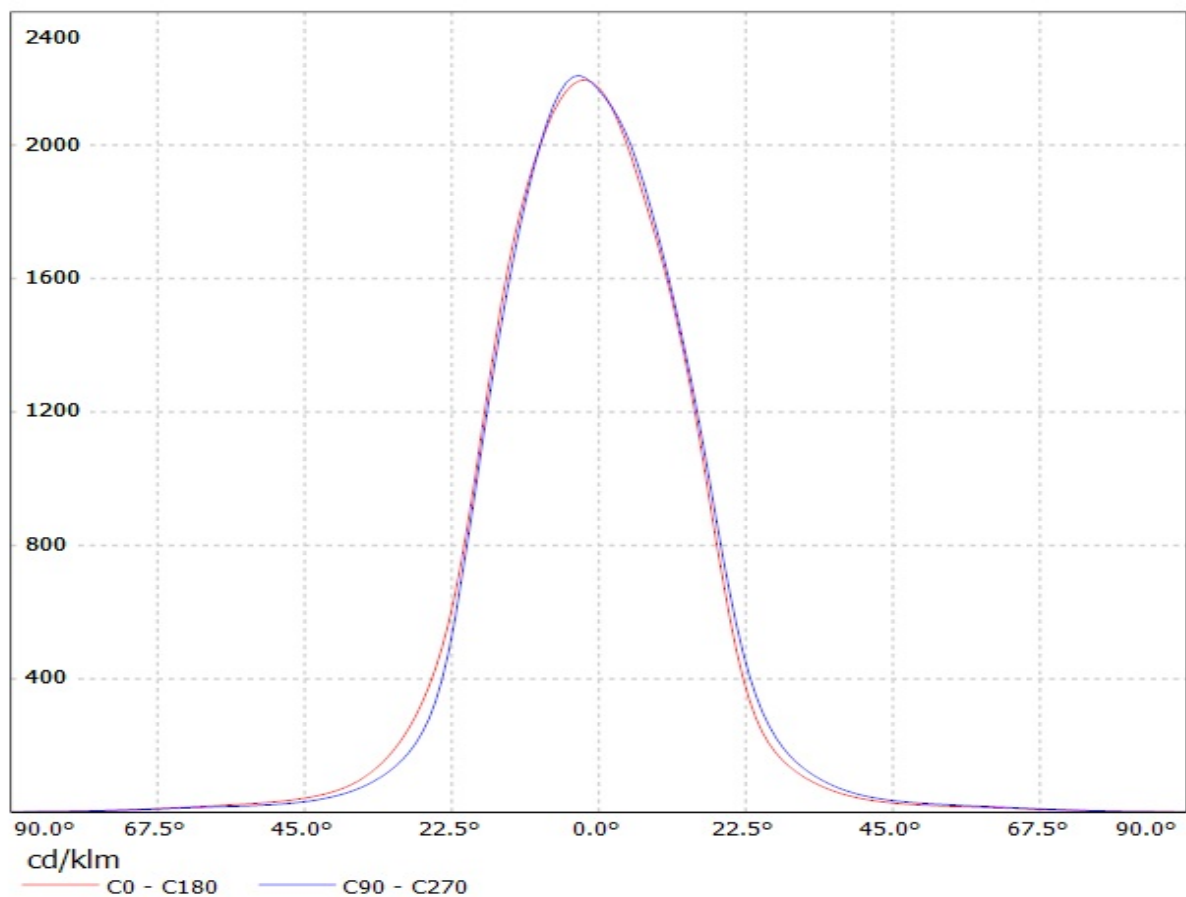


Luminaire: LEDIL OY FP13025\_LISA2-W-PIN & FP13031\_LISA2-W-CLIP-XTE (Cree XT-E 98lm @ 250mA) Efficiency=84%  
Lamps: 1 x CREE XT-E (98.9lm)

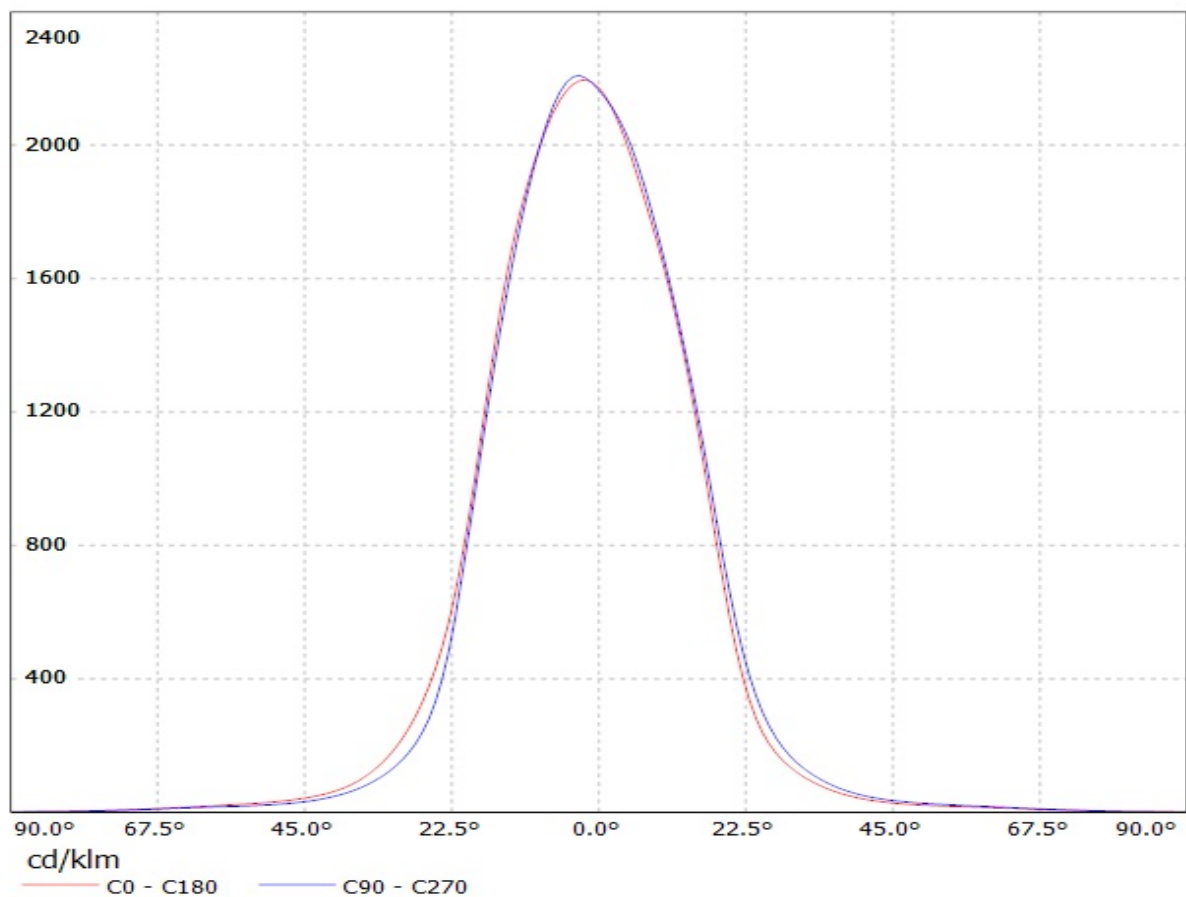

Luminaire: LEDIL OY FP13026\_LISA2-WW-PIN & FP13029\_LISA2-WW-CLIP-XTE (Cree XT-E 98lm @ 250mA) Efficiency=84%  
Lamps: 1 x CREE XT-E (98.9lm)

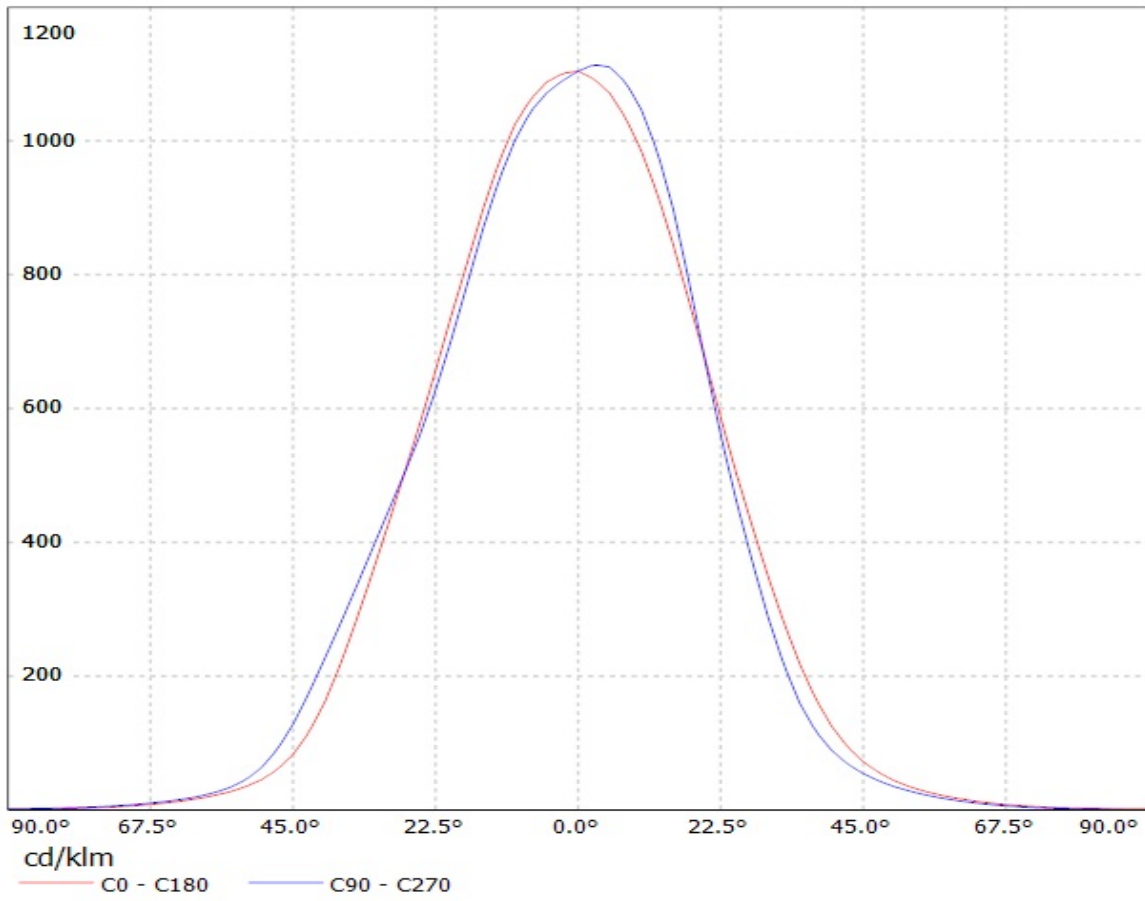


Luminaire: LEDIL OY FP13026\_LISA2-WW-PIN & FP13029\_LISA2-WW-CLIP-XTE (Cree XT-E 98lm @ 250mA) Efficiency=84%  
Lamps: 1 x CREE XT-E (98.9lm)

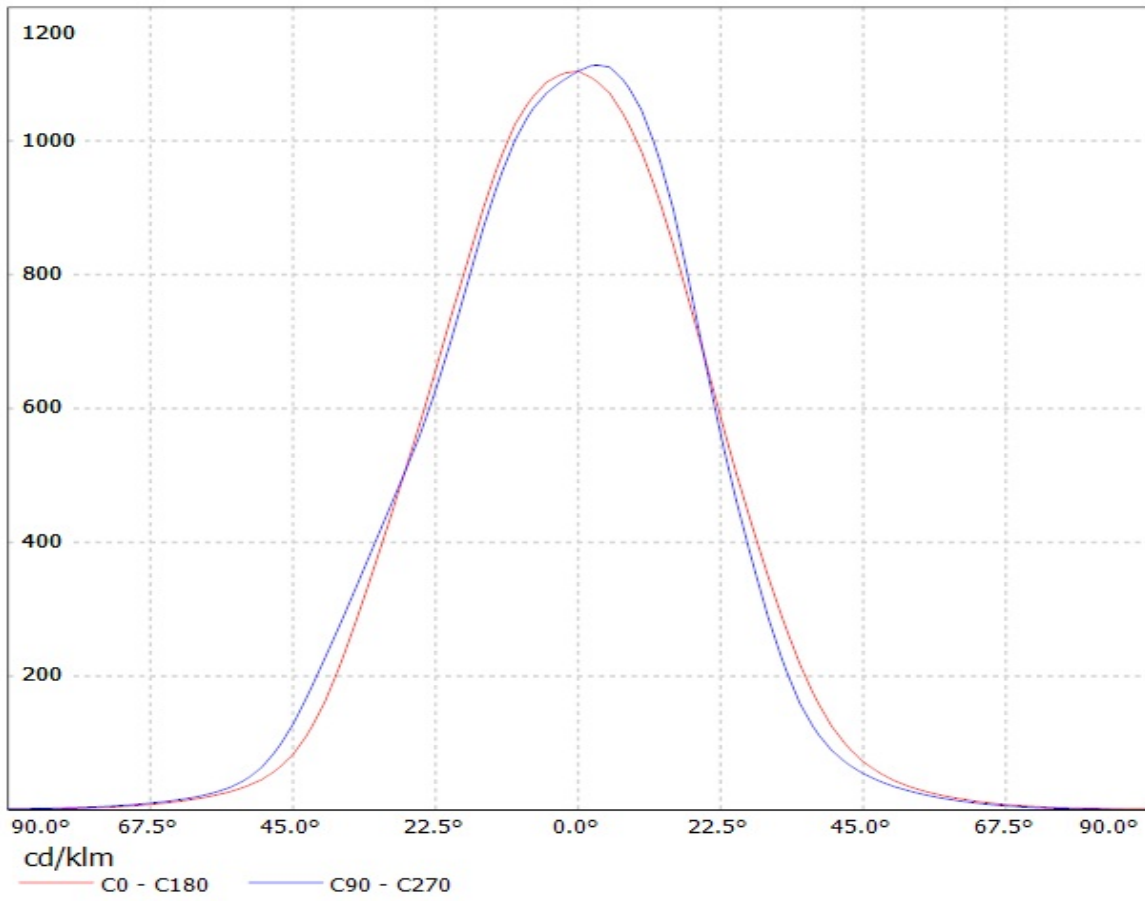




Luminaire: LEDIL OY FP13025\_LISA2-W-PIN & FP13031\_LISA2-W-CLIP-XTE (Cree XT-E 98lm @ 250mA) Efficiency=84%  
Lamps: 1 x CREE XT-E (98.9lm)

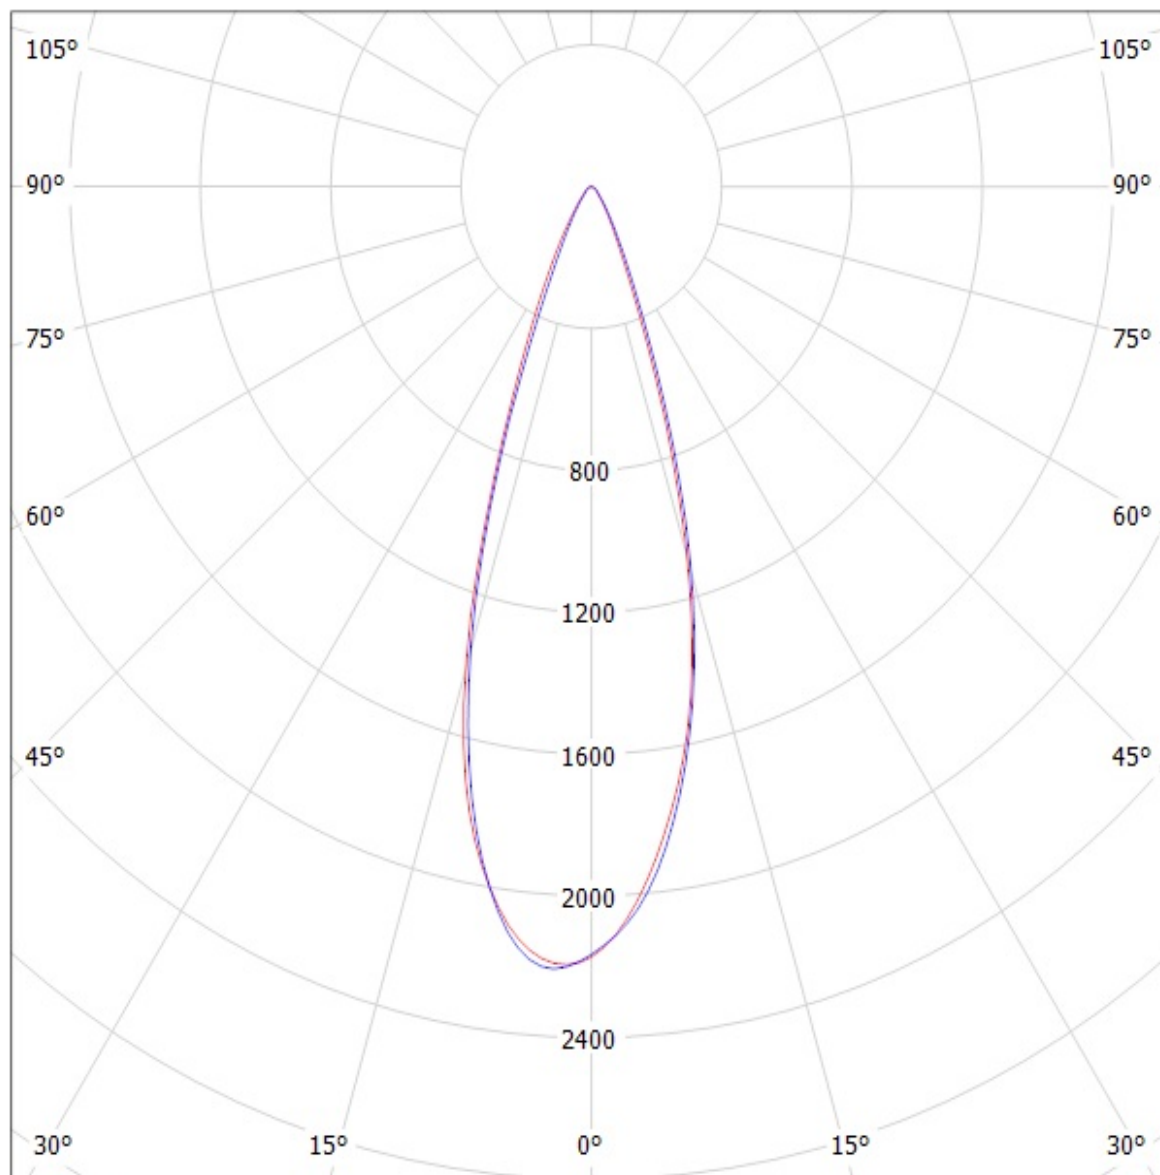

cd/klm

— C0 - C180    — C90 - C270


Luminaire: LEDIL OY FP13025\_LISA2-W-PIN & FP13031\_LISA2-W-CLIP-XTE (Cree XT-E 98lm @ 250mA) Efficiency=84%  
Lamps: 1 x CREE XT-E (98.9lm)

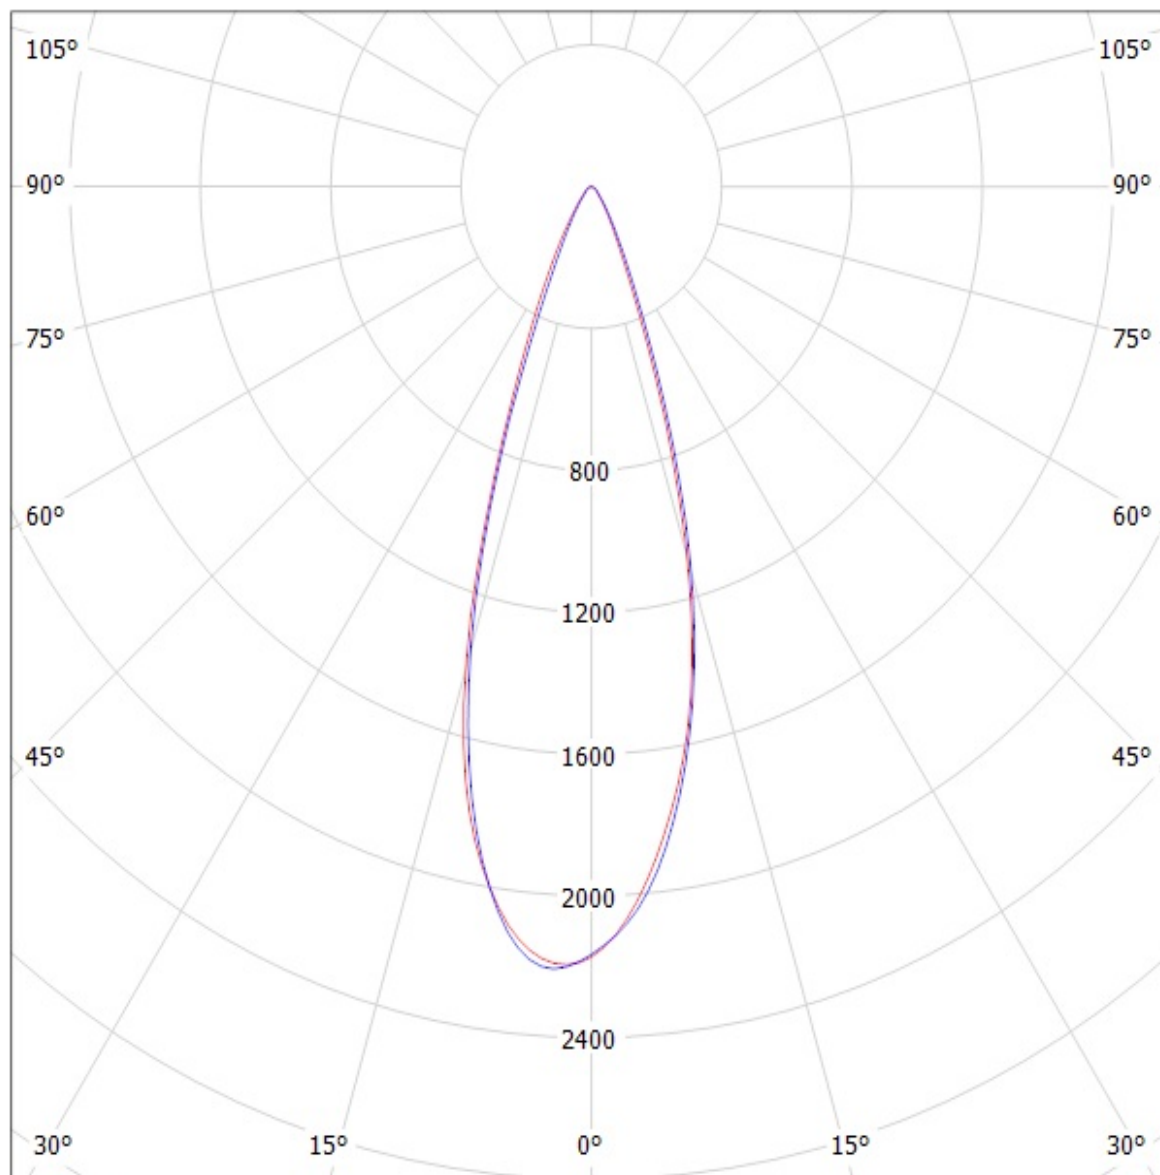

cd/klm

— C0 - C180    — C90 - C270


Luminaire: LEDIL OY FP13026\_LISA2-WW-PIN & FP13029\_LISA2-WW-CLIP-XTE (Cree XT-E 98lm @ 250mA) Efficiency=84%  
Lamps: 1 x CREE XT-E (98.9lm)

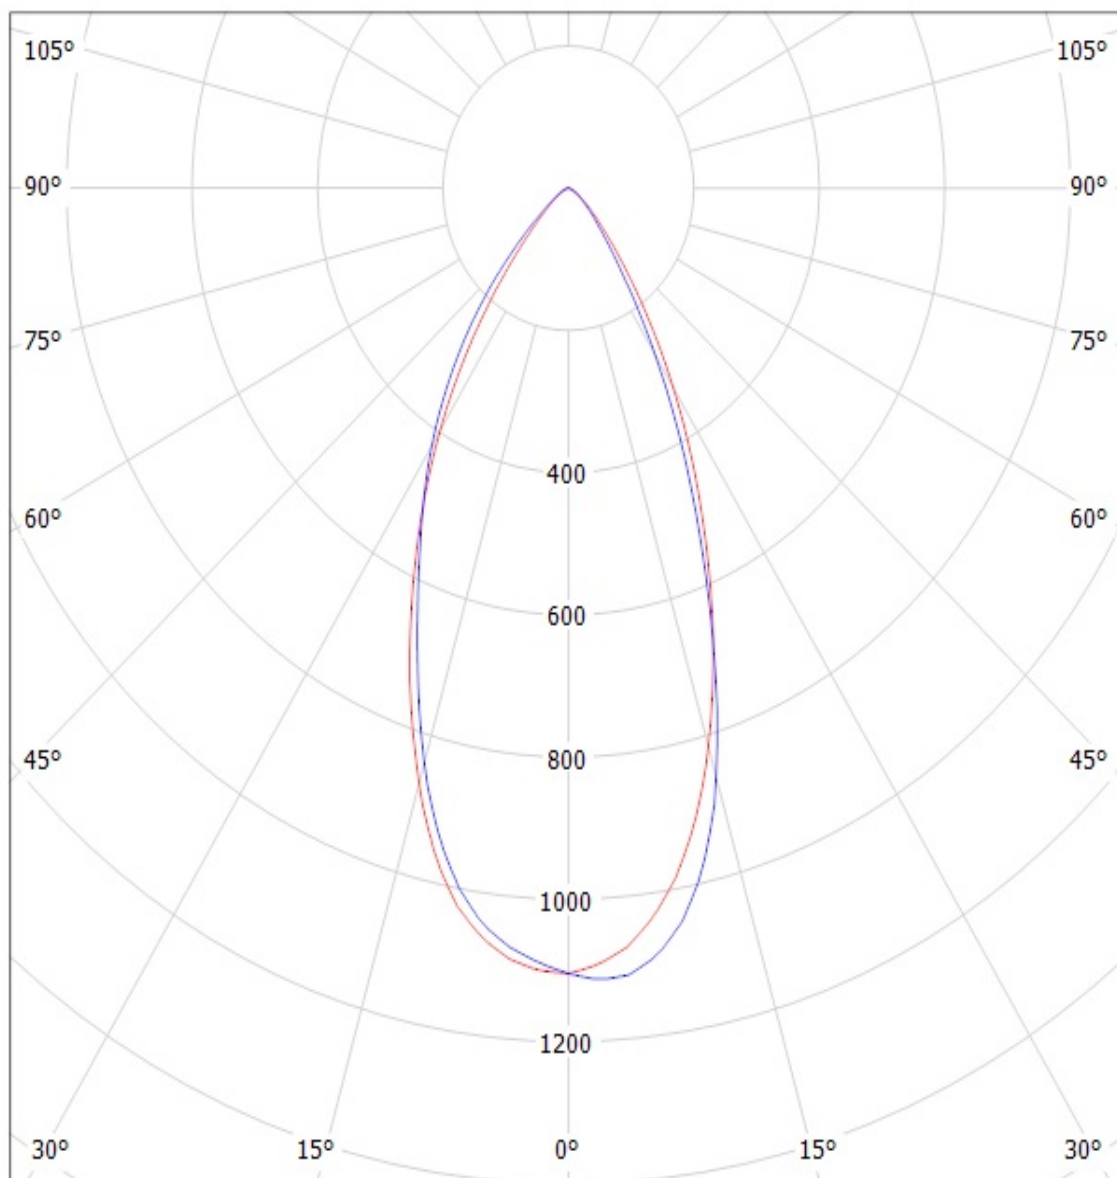

cd/klm

— C0 - C180    — C90 - C270

Luminaire: LEDIL OY FP13026\_LISA2-WW-PIN & FP13029\_LISA2-WW-CLIP-XTE (Cree XT-E 98lm @ 250mA) Efficiency=84%  
Lamps: 1 x CREE XT-E (98.9lm)

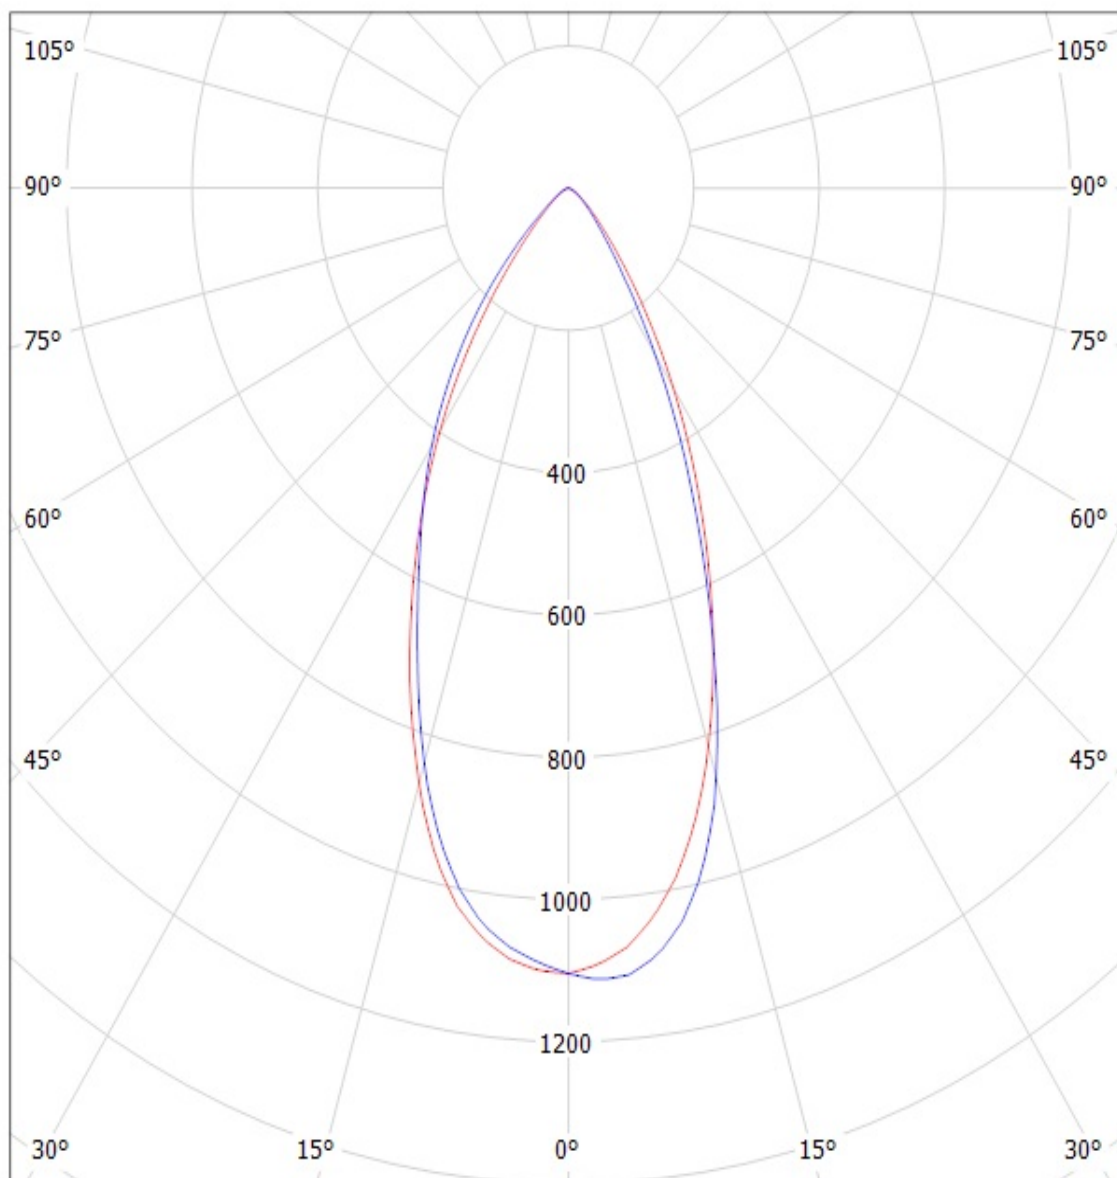

cd/klm

— C0 - C180 — C90 - C270