

DIN Rail Mounting

Altech DIN Rails comply with EN 60715 and DIN 50045, 50022 and 50035 standards. DIN Rails have been accepted throughout the world, allowing the equipment or panel builder to mount a wide variety of control components, devices, terminal blocks, power supplies, etc. on the same rail. The use of DIN Rails enhances design capabilities, saves space and reduces labor.

Standard rails are made of regular steel with galvanic zinc plating and passivation and are available in various configurations. Aluminum and stainless steel rails are also available but only in 35 mm size and 7.5 mm deep.

Standard DIN Rails are available in 35mm (7.5 and 15mm deep), 32mm and 15mm widths and are supplied in 1 m (3'3") and 2 m (6'6") lengths. Upon request they can be cut to custom lengths and punched with custom holes or perforations.


- 35mm, 32mm, 15mm
- Perforated or un-perforated
- Standard rail is steel with galvanic zinc plating and passivation
- Aluminum Rail is made of Aluminum
- Stainless steel rail is made of AISI 304 type stainless steel

Support Brackets

Support Brackets elevate DIN Rails away from the panel to facilitate component mounting and to increase wiring access. Angled brackets tilt the rail by 35° to improve visibility. Straight brackets are available in three heights for optimum positioning of the rail.


Brackets mount with 2 screws to any panel or flat surface and have tapped center holes for rail mounting. Bracket material is steel, zinc plated yellow chromated.

DIN35

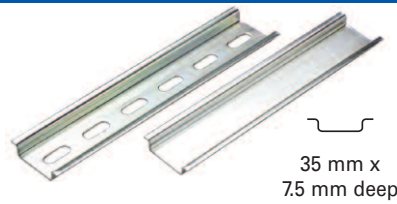


Type	Cat. No.	Length	Std. Pk.
Perforated Steel	2511120	2m	20
	2511120/1M	1m	40
Unperforated Steel	2511110	2m	20
	2511110/1M	1m	40
Perforated Stainless Steel	2511125	2m	20
	2511125/1M	1m	40
Unperforated Stainless Steel	2511115	2m	20
	2511115/1M	1m	40
Perforated Aluminum	2511121	2m	20
	2511121/1M	1m	40
Unperforated Aluminum	2511111	2m	20
	2511111/1M	1m	40


Perforated Steel and Stainless Dimensions

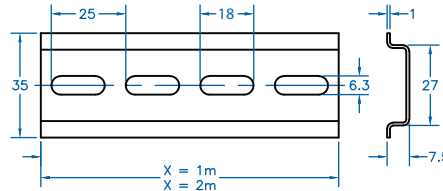


Perforated Aluminum Dimensions

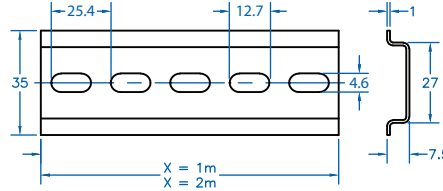



Unperforated Dimensions

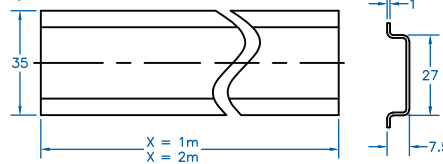


DIN35

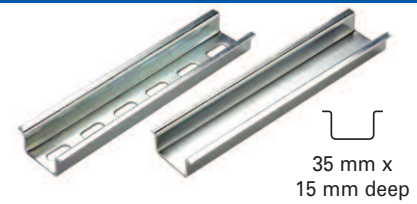

Type	Cat. No.	Length	Std. Pk.
Perforated Steel	CA701-15/S-2M	2m	10
	CA701-15/S	1m	20
Unperforated Steel	CA701-15-2M	2m	10
	CA701-15	1m	20

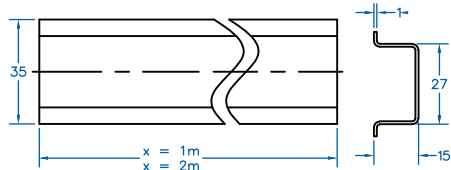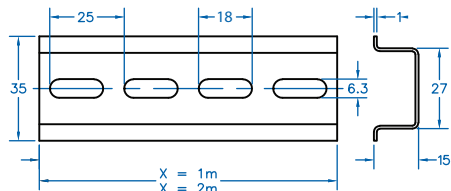


CA603



Suitable for all mounting rails

Cat. No.	Std. Pk.
CA603	25


TSTW



Complete with rail mounting hardware: including one screw & one locknut



Height	Cat. No.	Std. Pk.
1"	CA703	25
2"	CA803	25
3"	CA903	25

DIN32

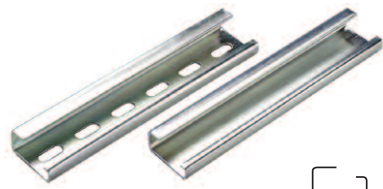


32 mm x
15 mm deep

Type	Cat. No.	Length	Std. Pk.
Perforated Steel	2511160	2m	10
	2511160/1M	1m	20
Unperforated Steel	2511150	2m	10
	2511150/1M	1m	20

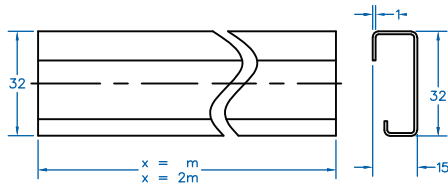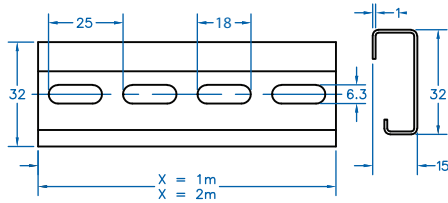

DIN15

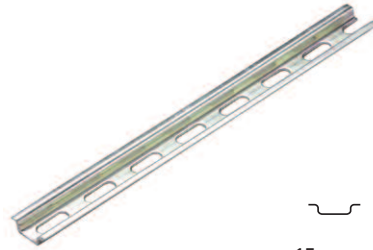

15 mm x
5.5 mm deep

Type	Cat. No.	Length	Std. Pk.
Perforated Steel	CA601/S	1m	50

