


# AC2485



## AS-Interface CompactLine module

CompactM12 2 DO 2 DI T V4A A/B

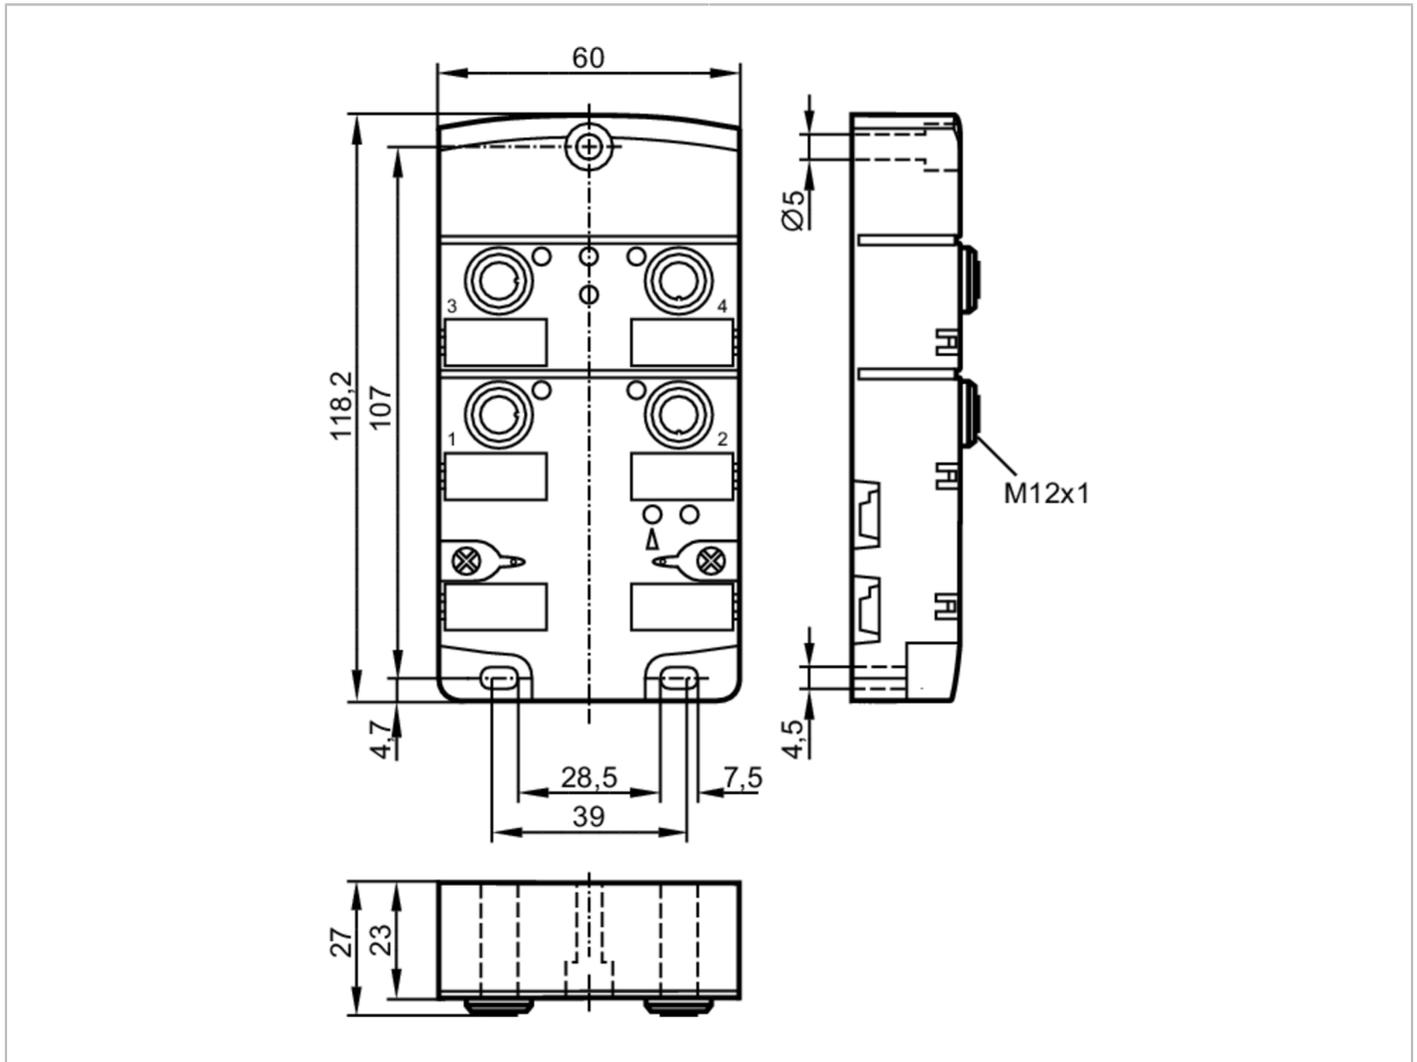

Application	
Application	field installation
Electrical data	
Operating voltage [V]	26.5...31.6 DC
Max. current consumption from AS-i [mA]	220
Max. current load total [A]	4
Additional voltage supply [V]	10...30 DC; (AUX)
Max. current consumption from additional supply [mA]	4000; (AUX)
Integrated watchdog	yes
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 2
Inputs	
Number of digital inputs	2
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)



## AS-Interface CompactLine module

CompactM12 2 DO 2 DI T V4A A/B

Sensor supply of the inputs		AS-i
Power supply	[V]	20...30; (DC)
Max. total current rating of inputs	[mA]	180
Input current limitation	[mA]	15
Input current High	[mA]	6...10
Input current Low	[mA]	0...2
Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes

## Outputs

Number of digital outputs		2
Circuit		PNP
Voltage range DC	[V]	10...30; (AUX)
Max. current load per output	[mA]	2000; (utilisation category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))
Max. current load outputs total	[A]	4
Short-circuit proof		yes
Electrically separated		yes
Actuator supply outputs		AUX

## Operating conditions

Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-25...80
Max. relative air humidity	[%]	90; (non condensing)
Max. height above sea level	[m]	2000
Protection		IP 67; (when flat cables are used E7400x / E7401x)

## Tests / approvals

EMC		EN 61000-6-2	
		EN 62026-2	
		EN 50581	
MTTF	[years]	251	
UL approval		power supply	Class 2

## AS-i classification

AS-i version		2.11; 3.0
AS-i addressing		IR addressing possible
Extended addressing mode		yes
AS-i master profile		M2; M3; M4
AS-i profile		S-B.A.E
AS-i I/O configuration	[hex]	B
AS-i ID code	[hex]	A.E
AS-i certificate		128501

# AC2485



## AS-Interface CompactLine module

CompactM12 2 DO 2 DI T V4A A/B

Assignment of the data bits	data bit	D0	D1	D2	D3
	input	-	-	3	4
	socket	-	-	I-3	I-4
	pin	-	-	2+4	2+4
	Output	1	2	-	-
	socket	O-1	O-2	-	-
	pin	4	4	-	-

### Mechanical data

Weight	[g]	292
Housing		rectangular
Type of mounting		AS-i flat cables directly connectable
Dimensions	[mm]	118.2 x 60 x 27
Materials		PA; socket: stainless steel (316L/1.4404); threaded inserts in the lower part: stainless steel (316L/1.4404); O-ring: EPDM; screws: stainless steel (316Cu/1.4578); piercing contacts: CuSn6 nickel-plated and tin-plated
Sealing material		EPDM

### Displays / operating elements

Display	switching status	LED, yellow I1...I2, O1...O2
	operation	LED, green AS-i, AUX
	errors	LED, red

### Electrical connection

Module connection	Flat cables
-------------------	-------------

### Accessories


Accessories (optional)	Stainless steel sleeve, for installation in case of high mechanical stress , E70402
------------------------	---

### Remarks

Remarks	Do not connect any of the following points to an external potential: I-, I+, I1, I2
	The connections are electrically connected with the AS-i cable.
Pack quantity	1 pcs.

### Electrical connection - Inputs

Connector: M12; coding: A; Sealing: EPDM



	Inputs
1	Sensor supply L+
2+4	data input 1 internally bridged
3	Sensor supply L-
5	functional earth

# AC2485




## AS-Interface CompactLine module

CompactM12 2 DO 2 DI T V4A A/B

### Electrical connection - Outputs

Connector: M12; coding: A; Sealing: EPDM



	Outputs
3	external voltage AUX -
4	switching output
5	functional earth (FE)
1, 2	not used