

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



CHARX connect universal, DC GB/T, Vehicle charging inlet, up to 250 A in Boost mode, 250 A Permanent, 1000 V DC, Single wires, length: 2 m, Front and rear mounting, M6, housing: black, for charging with direct current (DC), GB/T 20234.3-2015, A protective cap is supplied as standard for the DC contacts.

Product description

Vehicle charging inlets for charging with direct current (DC), compatible with GB/T vehicle charging connectors (EVSE), for installation in electric vehicles (EV).

Commercial data

Item number	1271833
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	*****
Product key	XWCAIG
GTIN	4063151463915
Weight per piece (including packing)	3,000 g
Weight per piece (excluding packing)	3,000 g
Customs tariff number	85444290
Country of origin	PL

# CHARX GBH4I-DC250-2,0M - Vehicle charging inlet



1271833

<https://www.phoenixcontact.com/in/products/1271833>

## Technical data

### Notes

General	A protective cap is supplied as standard for the DC contacts.
---------	---

### Product properties

Product type	Vehicle charging inlet
Product family	CHARX connect universal
Application	for charging with direct current (DC)
	for installation in electric vehicles (EV)
Charging standard	DC GB/T
Charging mode	Mode 4
Customer variations	On request

### Electrical properties

Note on the connection method	Crimp connection, cannot be disconnected
Coding	1 k $\Omega$ (between PE and CC1)
Temperature measurement	DC contacts: 2x PT1000 (DIN EN 60751)
Type of charging current	DC
Charging power	250 kW
Charging current	250 A DC
Type of charging current	DC Boost Mode
Charging power	up to 250 kW (Boost Mode, depending on the ambient conditions. For detailed information, see the packing slip in the download area for this item.)
Charging current	up to 250 A DC

### Power contact

Number	3 (DC+, DC-, PE)
Rated voltage	1000 V DC
Rated current	250 A DC

### Signal contact

Number	6 (S+, S-, A+, A-, CC1, CC2)
Rated voltage	30 V AC
Rated current	2 A

### Temperature sensors (Pt 1000)

Sensor type	Pt 1000
Standards/regulations	DIN EN 60751
Attachment point	2 sensors for the DC contacts

### Locking actuator

Locking actuator	without locking actuator
------------------	--------------------------

## Dimensions

# CHARX GBH4I-DC250-2,0M - Vehicle charging inlet



1271833

<https://www.phoenixcontact.com/in/products/1271833>

Width	72 mm
Height	72 mm
Depth	72 mm

## Material specifications

Color (Housing)	black (9005)
Color (Mating face)	black (9005)
Material (Housing)	Plastic
Material (Contact surface)	Silver

## Cable/line

Cable length	2 m
Cable type	Single wires

### Single-core wires for DC

Cable length	2 m
Cable structure	2 x 70 mm <sup>2</sup>
Single wire, material	Silicone
Single wire, color	OG
External cable diameter	17.90 mm ±0.3 mm
Cable resistance	≤ 0.259 Ω/km

### Single-core wire for PE

Cable length	2 m
Cable structure	1 x 25 mm <sup>2</sup>
Single wire, material	Silicone
Single wire, color	GN/YE
External cable diameter	8.60 mm ±0.1 mm
Cable resistance	≤ 0.743 Ω/km

### Single-core wires for locking actuator

Cable length	1 m
Cable structure	4 x 0.5 mm <sup>2</sup>
Single wire, material	PVC
Single wire, color	BU/RD, BU/GN, BU/YE, BU/BN
External cable diameter	1.60 mm ±0.20 mm
Cable resistance	≤ 37.1 Ω/m

### Single-core wires for Pt 1000 temperature sensors

Cable length	1 m
Cable structure	3 x 0.5 mm <sup>2</sup>
Single wire, material	PVC
Single wire, color	BN
	GN
	YE
External cable diameter	1.60 mm ±0.20 mm

# CHARX GBH4I-DC250-2,0M - Vehicle charging inlet



1271833

<https://www.phoenixcontact.com/in/products/1271833>

Cable resistance	≤ 37.1 Ω/m
Single-core wires for communication	
Cable length	1 m
Cable structure	2 x 0.5 mm <sup>2</sup>
Single wire, material	PVC
Single wire, color	BK
	WH
External cable diameter	1.60 mm ±0.20 mm
Cable resistance	≤ 37.1 Ω/m

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	> 10000
Insertion force	< 100 N
Withdrawal force	< 100 N

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (Vehicle charging inlet)	IP55 (plugged in; when plugged in and ready to operate, the degree of protection is only ensued if both plug-in components are original products from Phoenix Contact or suitable standard-compliant products)
	IP67 (Inner area of vehicle charging inlet)
Ambient temperature (operation)	-40 °C ... 40 °C (60°C, maximum (current reduction required, observe the DC contact temperature limit value of 90°C))
Altitude	4000 m (above sea level)

## Standards and regulations

### Standards

Standards/regulations	GB/T 20234.3-2015
-----------------------	-------------------

## Mounting

Mounting type	Front and rear mounting (0 to 90 degree frontal inclination possible)
Mounting hole diameter	6.70 mm (ø)
Fixing screws	M6
Screws included in the scope of delivery	none


# CHARX GBH4I-DC250-2,0M - Vehicle charging inlet

1271833

<https://www.phoenixcontact.com/in/products/1271833>


## Drawings

Connection diagram

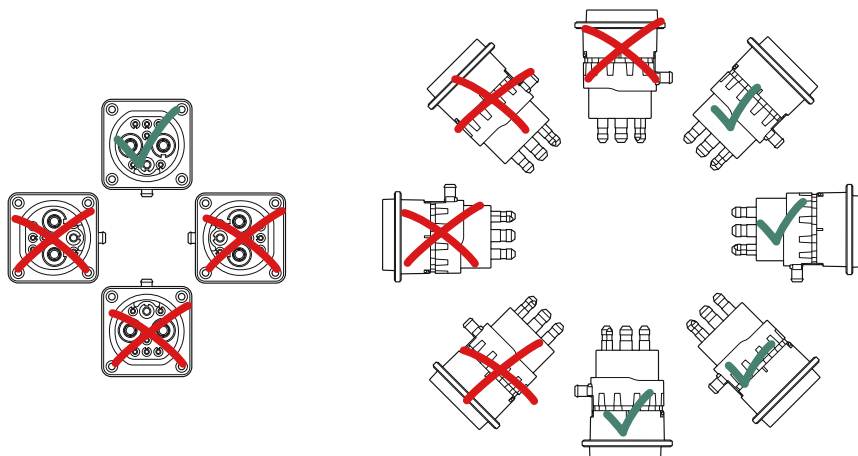

Installation positions

Drilling plan/solder pad geometry

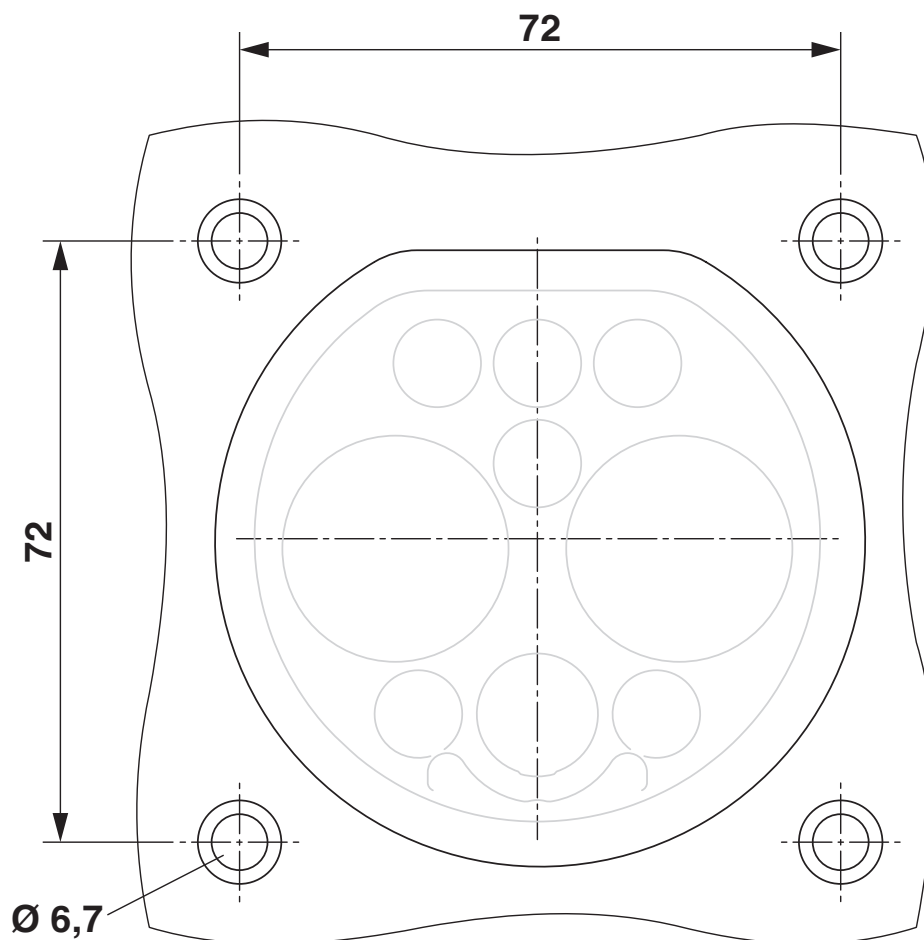


# CHARX GBH4I-DC250-2,0M - Vehicle charging inlet

1271833

<https://www.phoenixcontact.com/in/products/1271833>



Schematic diagram

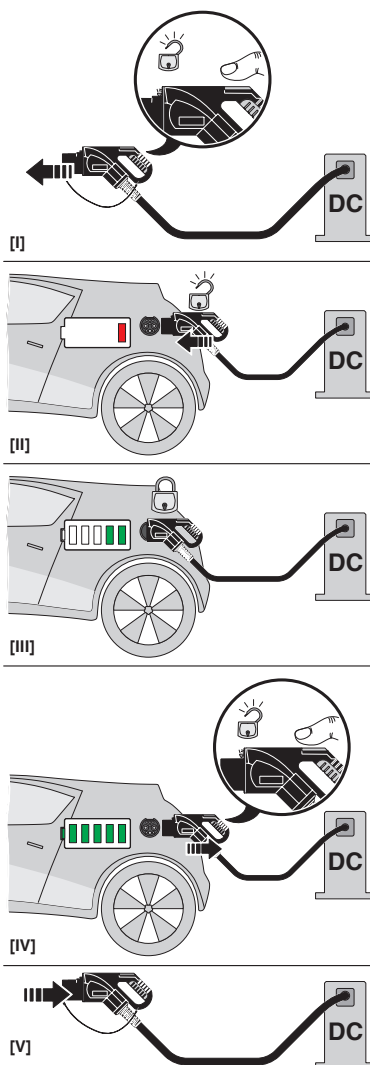

Operating instructions


# CHARX GBH4I-DC250-2,0M - Vehicle charging inlet



1271833


<https://www.phoenixcontact.com/in/products/1271833>

Connection diagram

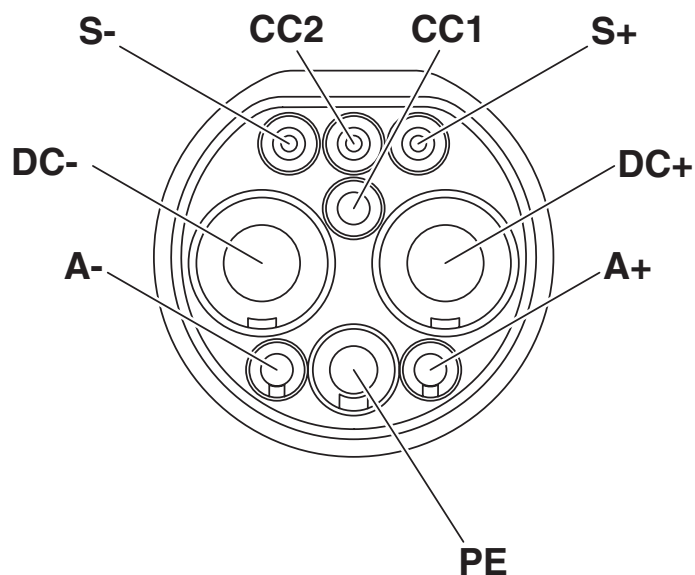

Pin assignment of vehicle charging inlets

Dimensional drawing

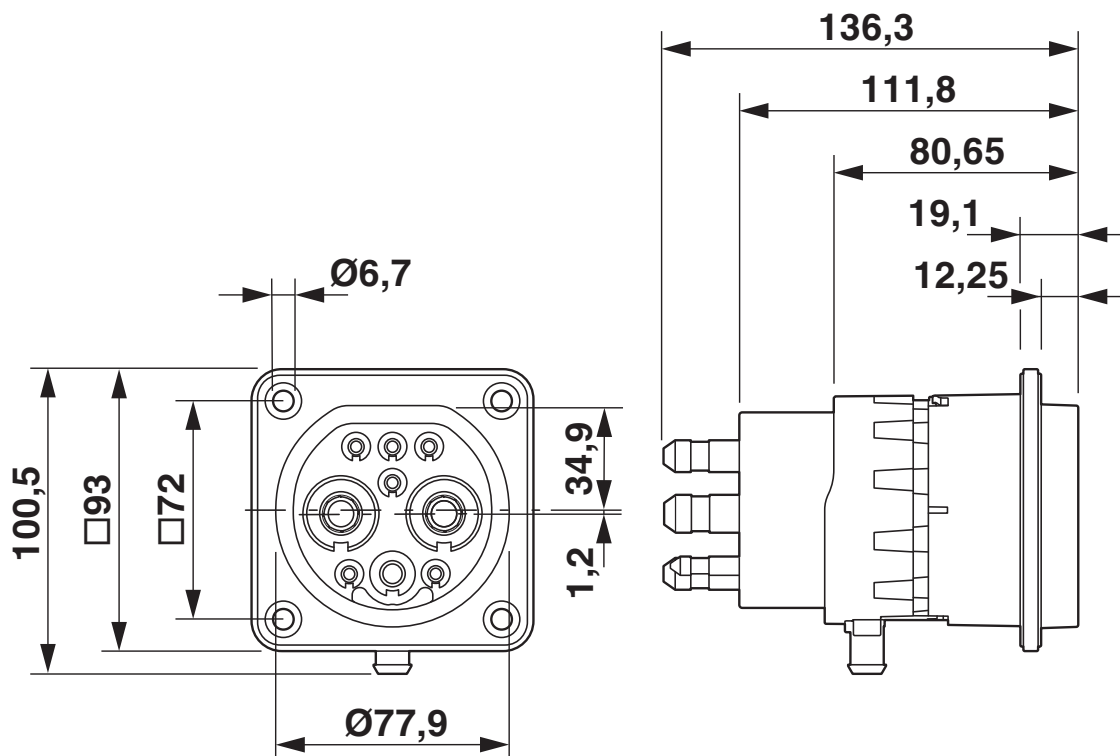

Dimensional drawing

# CHARX GBH4I-DC250-2,0M - Vehicle charging inlet



1271833

<https://www.phoenixcontact.com/in/products/1271833>

## Classifications

### ECLASS

ECLASS-11.0	27144706
ECLASS-12.0	27144706
ECLASS-13.0	27144706

### ETIM

ETIM 9.0	EC002898
----------	----------

### UNSPSC

UNSPSC 21.0	39121800
-------------	----------



# CHARX GBH4I-DC250-2,0M - Vehicle charging inlet



1271833

<https://www.phoenixcontact.com/in/products/1271833>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-10
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	2-ethylhexyl 10-ethyl-4,4-dioctyl-7-oxo-8-oxa-3,5-dithia-4-stannatetradecanoate (DOTE)(CAS: 15571-58-1)
	Lead(CAS: 7439-92-1)
SCIP	4795bcc1-0e13-4c8e-8b22-f33fa8102283

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.  
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420  
[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)