


A265-01-01A

ITEMS		MODEL	DRJ15-24-1
1	Nominal Output Voltage	V	24
2	Maximum Output Current	A	0.63
3	Maximum Output Power	W	15.1
4	Efficiency (Typ) (*1)	100VAC	%
		230VAC	%
5	Input Voltage Range (*2)(*13)	-	85- 264VAC(47-63Hz) OR 120- 370VDC
6	Input Current (Typ) (*1)	A	0.32/0.18
7	Inrush Current (Typ) (*1)(*3)	-	14A at 100VAC, 33A at 230VAC, Ta=25°C, Cold Start
8	PFHC	-	-
9	Power Factor (Typ)	-	-
10	Output Voltage Range	V	21.6 - 28.5
11	Maximum Ripple & Noise (*4)	0<Ta<70°C	mV
		-20≤Ta≤0°C	mV
		Io≤30%	mV
12	Maximum Line Regulation (*4)(*5)	mV	120
13	Maximum Load Regulation (*4)(*6)	mV	192
14	Temperature Coefficient	-	Less than 0.02% / °C
15	Over Current Protection (*7)	A	0.66 -
16	Over Voltage Protection (*8)	V	30.0 - 34.8
17	Hold-up Time (Typ) (*9)	-	20ms
18	Leakage Current (*10)	-	Less than 0.75mA
19	Remote Control	-	-
20	Parallel Operation	-	-
21	Series Operation	-	Possible
22	Operating Temperature (*11)(*13)	-	-20 - +70°C (-20°C:50%, -10- +55°C:100%, +70°C:50%)
23	Operating Humidity	-	30 - 95%RH (No Condensing)
24	Storage Temperature	-	-40 - +85°C
25	Storage Humidity	-	10 - 95%RH (No Condensing)
26	Cooling	-	Convection Cooling
27	Withstand Voltage	-	Input - FG : 2kVAC (20mA), Input - Output : 3kVAC (20mA) Output - FG : 500VAC (50mA) for 1min
28	Isolation Resistance	-	More than 100MΩ at 25°C and 70%RH Output to FG : 500VDC
29	Vibration	-	At no operating, 10 - 55Hz (Sweep for 1min) 19.6m/s ² Constant, X,Y,Z 1hour each.
30	Shock (In package)	-	Less than 294m/s ²
31	Safety	-	Approved by UL60950-1, CSA60950-1, EN60950-1, UL508,CSA C22.2 No.107.1. Designed to meet Den-an Appendix 8 at 100VAC only.
32	Line DIP	-	Designed to meet SEMI-F47 (200VAC Line only)
33	Conducted Emission (*12)	-	Designed to meet EN55011/EN55022-B, FCC-ClassB, VCCI-B
34	Radiated Emission (*12)	-	Designed to meet EN55011/EN55022-B, FCC-ClassB, VCCI-B
35	Immunity (*12)	-	Designed to meet IEC61000-6-2 IEC61000-4-2, -3, -4, -5, -6, -8, -11
36	Weight (Typ)	g	115
37	Size (W x H x D)	mm	21.5 x 75 x 90 (Refer to Outline Drawing)

*Read instruction manual carefully, before using the power supply unit.

=NOTES=

- *1. At 100VAC/230VAC, Ta=25°C, nominal output voltage and maximum output power.
- *2. For cases where conformance to various safety specs (UL, CSA) are required, to be described as 100 - 240VAC(50-60Hz).
- *3. Not applicable for the in-rush current to Noise Filter for less than 0.2ms.
- *4. Please refer to Fig. A for measurement of Vo, line & load regulation and ripple voltage.
- *5. 85 - 264VAC, constant load.
- *6. No load-Full load, constant input voltage.
- *7. Hiccup with automatic recovery.
Avoid to operate at over load or short circuit condition.
- *8. OVP circuit will shut down output, manual reset (Re power on).
- *9. At 100VAC, Ta=25°C, nominal output voltage and 80% output power.
- *10. Measured by the each measuring method of UL, CSA and Den-an(at 60Hz), Ta=25°C.
- *11. Output Derating
 - Derating at standard mounting. Refer to LOAD vs. AMBIENT TEMPERATURE (A265-01-02_).
 - Load (%) is percent of maximum output power or maximum output current, do not exceed its derating of maximum load.
- *12. The power supply is considered a component which will be installed into a final equipment.
The final equipment should be re-evaluated that it meets EMC directives.
- *13. Output derating needed when input voltage less than 90VAC. Refer to LOAD vs. INPUT VOLTAGE (A265-01-02_).

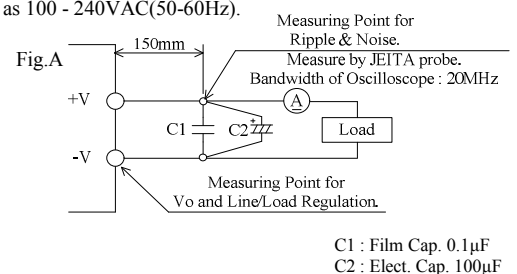

OUTPUT DERATING

A265-01-02

Ta (°C)	LOAD (%)	
	MOUNTING A	MOUNTING B
-20	50	50
-10 - +45	100	100
55	100	80
70	50	50

INPUT VOLTAGE (VAC)	LOAD (%)
	MOUNTING A,B
85	80
90 - 264	100

