

WTB12C-3P2432A71

W12-3

PHOTOELECTRIC SENSORS





Ordering information

Туре	Part no.
WTB12C-3P2432A71	1067773

Other models and accessories → www.sick.com/W12-3

Illustration may differ



Detailed technical data

Features

Sensor/ detection principle	Photoelectric proximity sensor, Background suppression
Dimensions (W x H x D)	15.6 mm x 48.5 mm x 42 mm
Housing design (light emission)	Rectangular
Sensing range max.	20 mm 350 mm ¹⁾
Sensing range	20 mm 350 mm ¹⁾
Type of light	Visible red light
Light source	PinPoint LED ²⁾
Light spot size (distance)	Ø 6 mm (200 mm)
Wave length	640 nm
Adjustment	IO-Link Single teach-in button
Pin 2 configuration	External input, Teach-in input, Sender off input, Detection output, logic output

 $^{^{1)}}$ Object with 90 % reflectance (referred to standard white, DIN 5033).

 $^{^{2)}}$ Average service life: 50,000 h at T_U = +25 °C.

Mechanics/electronics

Supply voltage	10 V DC 30 V DC ¹⁾
Ripple	\leq 5 V_{pp}^{2}
Power consumption	\leq 45 mA $^{3)}$
Switching output	PNP
Switching mode	Light/dark switching
Signal voltage PNP HIGH/LOW	> Uv - 2,5 V / ca. 0 V
Output current I _{max.}	≤ 100 mA
Response time Q/ on Pin 2	200 μs 300 μs ^{4) 5)}
Switching frequency	1,500 Hz
Switching frequency Q / to pin 2	≤ 1,500 Hz ⁶⁾
Connection type	Male connector M12, 4-pin
Circuit protection	A ⁷⁾ B ⁸⁾ C ⁹⁾ D ¹⁰⁾
Protection class	III
Weight	120 g
IO-Link	√
Transmission rate	COM2
Housing material	Metal, Zinc diecast
Optics material	Plastic, PMMA
Enclosure rating	IP66 IP67
Ambient operating temperature	-40 °C +60 °C
Ambient storage temperature	-40 °C +75 °C
UL File No.	NRKH.E181493 & NRKH7.E181493
Repeatability Q/ on Pin 2:	100 μs ⁵⁾

 $^{^{1)}\,\}mathrm{Limit}$ values when operated in short-circuit protected network: max. 8 A.

Classifications

ECI@ss 5.0	27270904
ECI@ss 5.1.4	27270904
ECI@ss 6.0	27270904
ECI@ss 6.2	27270904
ECI@ss 7.0	27270904

 $^{^{2)}\,\}mathrm{May}$ not exceed or fall below U_{V} tolerances.

³⁾ Without load.

⁴⁾ Signal transit time with resistive load.

 $^{^{5)}}$ Valid for Q \backslash on Pin2, if configured with software.

 $^{^{6)}}$ With light / dark ratio 1:1, valid for Q \backslash on Pin2, if configured with software.

 $^{^{7)}}$ A = V_S connections reverse-polarity protected.

 $^{^{8)}}$ B = inputs and output reverse-polarity protected.

⁹⁾ C = interference suppression.

¹⁰⁾ D = outputs overcurrent and short-circuit protected.

WTB12C-3P2432A71 | W12-3

PHOTOELECTRIC SENSORS

ECI@ss 8.0	27270904
ECI@ss 8.1	27270904
ECI@ss 9.0	27270904
ETIM 5.0	EC002719
ETIM 6.0	EC002719
UNSPSC 16.0901	39121528

Smart Task

Smart Task name Counter + debouncing Logic function Direct WINDOW Hysteresis Timer function Deactivated On delay Off delay Off delay Impulse (one shot) Inverter Yes Maximum counting frequency SIO Direct: — 1) SIO Logic: 1000 Hz 2) IOL: 650 Hz 3) Counter reset SIO Direct: — SIO Logic: 1.5 ms IOL: 1,5 ms Min. Time between two process events (switches) SIO Direct: — SIO Logic: 500 µs IOL: 800 µs IOL: 800 µs IOL: 800 µs IOL: 30.000 ms IOL: 30.000 ms Debounce time max. SIO Direct: — SIO Logic: 30.000 ms IOL: 30.000 ms Switching signal Qt1 Output type (dependant on the adjusted threshold) Measuring value Counting value		
WINDOW Hysteresis Timer function Deactivated On delay Off delay ON and OFF delay Impulse (one shot) Inverter Yes Maximum counting frequency SIO Direct: — 1) SIO Logic: 1000 Hz 2) IOL: 650 Hz 3) Counter reset SIO Direct: — SIO Logic: 1,5 ms IOL: 1,5 ms IOL: 1,5 ms IOL: 3,5 ms IOL: 800 µs IOL: 800 µs Debounce time max. SIO Direct: — SIO Logic: 500 µs IOL: 800 µs IOL: 30.000 ms IOL: 30.000 ms IOL: 30.000 ms Switching signal QL1 Output type (dependant on the adjusted threshold) Switching signal QL2 Output type (dependant on the adjusted threshold)	Smart Task name	Counter + debouncing
On delay Off delay Off delay On and OFF delay Impulse (one shot) Inverter Yes Maximum counting frequency SIO Direct: — 1) SIO Logic: 1,000 Hz 2) IOL: 650 Hz 3) Counter reset SIO Direct: — SIO Logic: 1,5 ms IOL: 1,5 ms IOL: 1,5 ms Min. Time between two process events (switches) SIO Direct: — SIO Logic: 500 μs IOL: 800 μs Debounce time max. SIO Direct: — SIO Logic: 30.000 ms IOL: 30.000 ms Switching signal Q _{1,2} Output type (dependant on the adjusted threshold) Switching signal Q _{1,2} Output type (dependant on the adjusted threshold)	Logic function	WINDOW
Maximum counting frequency SIO Direct: — 1) SIO Logic: 1000 Hz 2) IOL: 650 Hz 3) Counter reset SIO Direct: — SIO Logic: 1,5 ms IOL: 1,5 ms Min. Time between two process events (switches) SIO Direct: — SIO Logic: 500 μs IOL: 800 μs Debounce time max. SIO Direct: — SIO Logic: 30.000 ms IOL: 30.000 ms Switching signal Q _{L1} Output type (dependant on the adjusted threshold) Switching signal Q _{L2} Output type (dependant on the adjusted threshold)	Timer function	On delay Off delay ON and OFF delay
SIO Logic: 1000 Hz ²⁾ IOL: 650 Hz ³⁾ Counter reset SIO Direct: — SIO Logic: 1,5 ms IOL: 1,5 ms Min. Time between two process events (switches) SIO Direct: — SIO Logic: 500 µs IOL: 800 µs Debounce time max. SIO Direct: — SIO Logic: 30.000 ms IOL: 30.000 ms IOL: 30.000 ms Output type (dependant on the adjusted threshold) Switching signal Q _{L2} Output type (dependant on the adjusted threshold)	Inverter	Yes
$SIO \ Logic: 1,5 \ ms$ $IOL: 1,5 \ ms$ $SIO \ Direct:$ $SIO \ Logic: 500 \ \mu s$ $IOL: 800 \ \mu s$ $Debounce \ time \ max.$ $SIO \ Direct:$ $SIO \ Logic: 30.000 \ ms$ $IOL: 30.000 \ ms$ $Switching \ signal \ Q_{L1}$ $Output \ type \ (dependant \ on \ the \ adjusted \ threshold)$ $Switching \ signal \ Q_{L2}$ $Output \ type \ (dependant \ on \ the \ adjusted \ threshold)$	Maximum counting frequency	SIO Logic: 1000 Hz ²⁾
$ \begin{array}{llllllllllllllllllllllllllllllllllll$	Counter reset	SIO Logic: 1,5 ms
SIO Logic: 30.000 ms IOL: 30.000 ms Switching signal Q _{L1} Output type (dependant on the adjusted threshold) Switching signal Q _{L2} Output type (dependant on the adjusted threshold)	·	SIO Logic: 500 μs
Switching signal Q _{L2} Output type (dependant on the adjusted threshold)	Debounce time max.	SIO Logic: 30.000 ms
	Switching signal Q _{L1}	Output type (dependant on the adjusted threshold)
Measuring value Counting value	Switching signal Q _{L2}	Output type (dependant on the adjusted threshold)
	Measuring value	Counting value

¹⁾ SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated").


Communication interface

Communication interface	IO-Link V1.1
Communication Interface detail	COM2 (38,4 kBaud)
Cycle time	2.3 ms
Process data length	16 Bit
Process data structure	Bit 0 = switching signal Q_{L1} Bit 1 = switching signal Q_{L2} Bit 2 15 = measuring value

²⁾ SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.

³⁾ IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

Adjustments possible




- ④ LED indicator green: Supply voltage active
- $\ensuremath{\mathfrak{G}}$ LED indicator yellow: Status of received light beam
- Adjustment sensing range: single teach-in button

Connection diagram

Cd-367

Characteristic curve


WTB12-3, red light, 350 mm

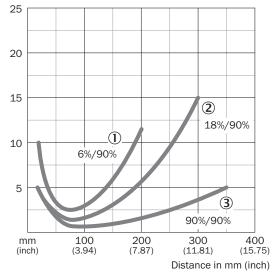

- $\ \textcircled{1}$ Sensing range on black, $\ \mbox{6\%}$ remission
- ② Sensing range on gray, 18 % remission
- Sensing range on white, 90% remission

Sensing range diagram


WTB12-3, red light, 350 mm

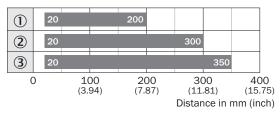

- Sensing range
- ① Sensing range on black, 6% remission
- ② Sensing range on gray, 18 % remission
- 3 Sensing range on white, 90% remission

Dimensional drawing (Dimensions in mm (inch))

WTB12-3, IO-Link

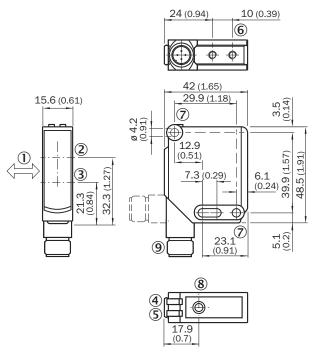

- ① Standard direction of the material being detected
- ② Optical axis, receiver
- 3 Optical axis, sender
- 4 LED indicator green: Supply voltage active
- (5) LED indicator yellow: Status of received light beam
- M4 threaded mounting hole, 4 mm deep
- 7 Mounting hole, Ø 4.2 mm
- Adjustment sensing range: single teach-in button
- Connection

Recommended accessories

Other models and accessories → www.sick.com/W12-3

	Brief description	Туре	Part no.	
Universal bar clamp systems				
0,000	Plate NO2 for universal clamp bracket, Zinc plated steel (sheet), Zinc die cast (clamping bracket), Universal clamp (5322626), mounting hardware	BEF-KHS-N02	2051608	
	Plate N03 for universal clamp bracket, zinc coated, Zinc plated steel (sheet), Zinc die cast (clamping bracket), Universal clamp (5322626), mounting hardware	BEF-KHS-N03	2051609	
	Plate N04 for universal clamp, steel, Zinc plated steel (sheet), Zinc die cast (clamping bracket), Universal clamp (5322626), mounting hardware	BEF-KHS-N04	2051610	
Device prote	ction (mechanical)			
	Protective housing for universal clamp, Zinc plated steel (protective housing), Zinc die cast (clamping bracket), Universal clamp, mounting hardware	BEF-SG-W12-3	2045175	
Mounting br	ackets and plates			
	Mounting bracket, large, stainless steel, mounting hardware included	BEF-WG-W12	2013942	
	Mounting bracket, small, stainless steel, mounting hardware included	BEF-WK-W12	2012938	
Terminal and	I alignment brackets			
	Double clamp bracket for dovetail mounting, Aluminum (anodised), mounting hardware included	BEF-DKH-W12	2013947	
	Clamping block for dovetail mounting, Aluminum (anodised), mounting hardware included	BEF-KH-W12	2013285	
Modules and	l gateways			
	IO-Link version V1.1, Port class 2, PIN 2, 4, 5 galvanically connected, Supply voltage 18 V DC 32 V DC (limit values, operation in short-circuit protected network max. 8 A)	IOLP2ZZ-M3201 (SICK Memory Stick)	1064290	
	IO-Link V1.1 Class A port, USB2.0 port, optional external power supply 24V $/$ 1A	IOLA2US-01101 (SiLink2 Master)	1061790	
	EtherCAT IO-Link Master, IO-Link V1.1, Port Class A, power supply via $7/8$ " cable 24 V $/$ 8 A, fieldbus connection via M12 cable	IOLG2EC-03208R01 (IO-Link Master)	6053254	
	PROFINET IO-Link Master, IO-Link V1.1, Port Class A, power supply via $7/8$ " cable 24 V / 8 A, fieldbus connection via M12 cable	IOLG2PN-03208R01 (IO-Link Master)	6053253	

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com

