

# **BIPOLAR ANALOG INTEGRATED CIRCUIT** $\mu$ PC3403

# HIGH PERFORMANCE QUAD OPERATIONAL AMPLIFIER


#### **DESCRIPTION**

The  $\mu$ PC3403 is monolithic Quad Operational Amplifier consists of four independent high-gain, internally frequency-compensated operational amplifiers, designed to operate from a single power supply or split power supplies over a wide range of voltages. The common mode input range includes the negative supply thereby eliminating the necessity for external biasing components in many applications.


#### **FEATURES**

- · Internal frequency compensation
- Common mode input voltage range includes V<sup>-</sup>
- · Wide supply voltage range 3 V to 32 V (Single) ±1.5 V to 16 V (Split)
- Class AB Output Stage for Minimal Crossover Distortion
- · Output short circuit protection

#### **EQUIVALENT CIRCUIT**

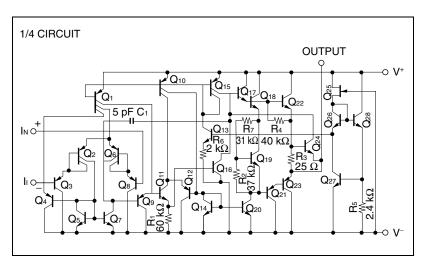

# **CONNECTION DIAGRAM** (Top View)



#### ORDERING INFORMATION

PART NUMBER	PACKAGE	QUALITY GRADE
μPC3403C	14-pin plastic DIP (7.62 mm (300))	Standard
μPC3403G2	14-pin plastic SOP (5.72 mm (225))	Standard

Please refer to "Quality Grades on NEC Semiconductor Devices" (Document No: C11531E) published by NEC Electronics Corporation to know the specification of the quality grade on the device and its recommended applications.

> The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.



# ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

PARAMETER  Voltage between V <sup>+</sup> and V <sup>-</sup> (Note 1)		SYMBOL	μ <b>P</b> C3403	UNIT	
		V+ - V-	-0.3 to +36		
Differential Input V	oltage		ViD	±30	V
Input Voltage (Note 2)		Vı	V <sup>-</sup> -0.3 to V <sup>+</sup> +0.3	V	
Output Voltage		(Note 3)	Vo	V <sup>-</sup> -0.3 to V <sup>+</sup> +0.3	V
Power Dissipation C Package		(Note 4)	Рт	570	mW
rower bissipation	G2 Package	(Note 5)	P1	550	mW
Operating Tempera	ture Range		Topt	−20 to +80	°C
Storage Temperature Range		Tstg	55 to +125	°C	

- Note 1. Reverse connection of supply voltage can cause destruction.
- Note 2. The input voltage should be allowed to input without damage or destruction. Even during the transition period of supply voltage, power on/off etc., this specification should be kept. The normal operation will establish when the both inputs are within the Common Mode Input Voltage Range of electrical characteristics.
- Note 3. This specification is the voltage which should be allowed to supply to the output terminal from external without damage or destructive. Even during the transition period of supply voltage, power on/off etc., this specification should be kept. The output voltage of normal operation will be the Output Voltage Swing of electrical characteristics.
- Note 4. Thermal derating factor is -7.6 mW / °C when ambient temperature is higher than 50 °C.
- Note 5. Thermal derating factor is -5.5 mW / °C when ambient temperature is higher than 25 °C.
- **Note 6.** Pay careful attention to the total power dissipation not to exceed the absolute maximum ratings, Note 4 and Note 5.

# **RECOMMENDED OPERATING CONDITIONS**

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage (Split)	V <sup>±</sup>	± 1.5		± 16	V
Supply Voltage (V = GND)	V+	+ 3		+ 32	V





# ELECTRICAL CHARACTERISTICS (Ta = 25 °C, $V^{\pm}$ = $\pm 15$ V)


CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITION
Input Offset Voltage	Vio		±2.0	±7.0	mV	
input Onset Voltage	VIO		±2.0	±7.0		V+ = +5 V, V- = GND
Input Offset Current	lio		±5	±50	nA	
input offset current			±5	±50	11.7	V+ = +5 V, V- = GND
Input Bias Current (Note 7)	lв		45	250	nA	
input bias current was a	16		45	250	IIA.	V+ = +5 V, V- = GND
Large Signal Voltage Gain	Δ	86	98		dB	Vo = $\pm 10$ V, RL = 2 k $\Omega$
Large Signal Voltage Gam	Αυ	86	98		αь	$V^+ = +5 \text{ V}, V^- = \text{GND}, R_L = 2 \text{ k}\Omega$
Comple Company	Icc		2.8	7.0	mA	$Vo = 0$ , $RL = \infty$ , $Io = 0$ A, All Amplifiers
Supply Current			2.5	7.0		$V^+ = +5 V$ , $V^- = GND$ , $Io = 0 A$ , All Amplifiers
Common Mode Rejection Ratio	CMR	70	90		dB	
Supply Voltage Rejection Ratio	SVR		30	150	μV/V	
Supply voltage Rejection Natio	SVN			150	μν/ν	V+ = +5 V, V- = GND
		±12	±13.5			$RL = 10 \text{ k}\Omega$
Output Voltage Swing	Vom	±10	±13		V	RL = 2.0 kΩ
		V+-1.7 0	V+–1.5 0			RL = 10 kΩ (Connect to GND), 5 V $\leq$ V <sup>+</sup> $\leq$ 30 V, V <sup>-</sup> = GND
Common Mode Input Voltage Range	Vicм	+13 15	+13.5 15		V	
Output Short Circuit Current	lo short	±10	±20	±45	mA	
Channel Separation			120		dB	f = 1 kHz to 20 kHz


Note 7. Input bias currents flow out from IC. Because each currents are base current of PNP-transistor on input stage.


# TYPICAL PERFORMANCE CHARACTERISTICS (Ta = 25 °C, TYP.)

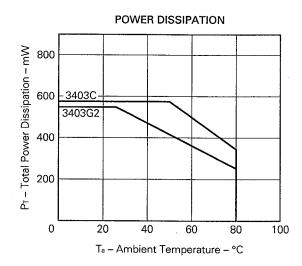


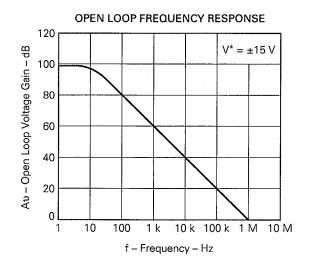

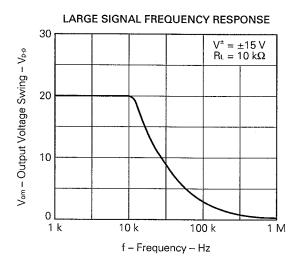

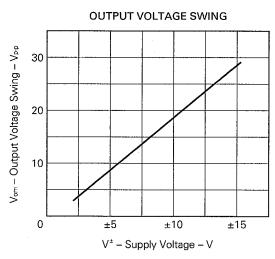


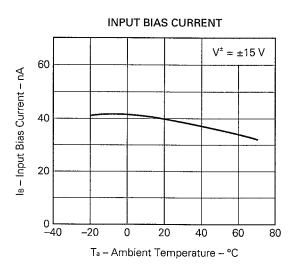


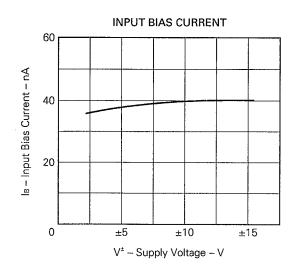


# **★ PACKAGE DRAWINGS (Unit: mm)**

# 14-PIN PLASTIC DIP (7.62 mm (300))

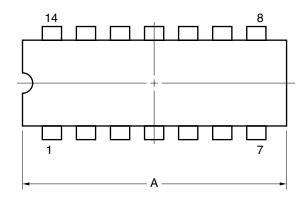

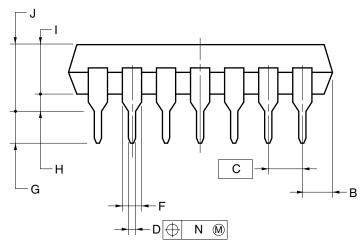

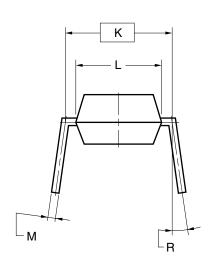


## **NOTES**

- Each lead centerline is located within 0.25 mm of its true position (T.P.) at maximum material condition.
- 2. Item "K" to center of leads when formed parallel.


ITEM	MILLIMETERS
Α	19.22±0.2
В	2.14 MAX.
С	2.54 (T.P.)
D	0.50±0.10
F	1.32±0.12
G	3.6±0.3
Н	0.51 MIN.
I	3.55
J	4.3±0.2
K	7.62 (T.P.)
L	6.4±0.2
М	$0.25^{+0.10}_{-0.05}$
N	0.25
R	0~15°
_	140 400 00004


P14C-100-300B1-3


# 14-PIN PLASTIC SOP (5.72 mm (225))

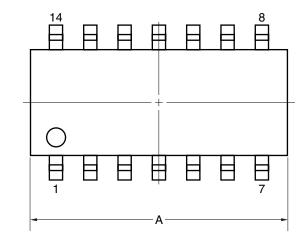

detail of lead end



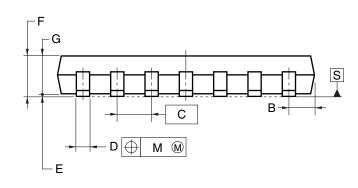



## NOTE

Each lead centerline is located within 0.1 mm of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS
Α	10.2±0.26
В	1.42 MAX.
С	1.27 (T.P.)
D	$0.42^{+0.08}_{-0.07}$
Е	0.1±0.1
F	$1.59^{+0.21}_{-0.2}$
G	1.49
Н	6.5±0.2
I	4.4±0.1
J	1.1±0.16
K	$0.17^{+0.08}_{-0.07}$
L	0.6±0.2
М	0.1
N	0.10
Р	3°+7°

S14GM-50-225B, C-6



## **★ RECOMMENDED SOLDERING CONDITIONS**

The  $\mu PC3403$  should be soldered and mounted under the following recommended conditions.

For soldering methods and conditions other than those recommended below, contact an NEC Electronics sales representative.

For technical information, see the following website.

Semiconductor Device Mount Manual (http://www.necel.com/pkg/en/mount/index.html)

## TYPES OF SURFACE MOUNT DEVICE

 $\mu$ PC3403G2: 14-pin plastic SOP (5.72 mm (225))

Process	Conditions	Symbol
Infrared Ray Reflow	Peak temperature: 230°C or below (Package surface temperature),	IR30-00-1
	Reflow time: 30 seconds or less (at 210°C or higher),	
	Maximum number of reflow processes: 1 time.	
Vapor Phase Soldering	Peak temperature: 215°C or below (Package surface temperature),	VP15-00-1
	Reflow time: 40 seconds or less (at 200°C or higher),	
	Maximum number of reflow processes: 1 time.	
Wave Soldering	Solder temperature: 260°C or below, Flow time: 10 seconds or less,	WS60-00-1
	Maximum number of flow processes: 1 time,	
	Pre-heating temperature: 120°C or below (Package surface temperature).	
Partial Heating Method	Pin temperature: 300°C or below,	_
	Heat time: 3 seconds or less (Per each side of the device).	

Caution Apply only one kind of soldering condition to a device, except for "partial heating method", or the device will be damaged by heat stress.

#### TYPES OF THROUGH HOLE DEVICE

 $\mu$ PC3403C: 14-pin plastic DIP (7.62 mm (300))

Soldering method	Soldering conditions	Recommended condition symbol
Wave soldering	Solder temperature: 260°C or below, Flow time: 10 seconds or below	

Data Sheet G12847EJ7V0DS

7

- The information in this document is current as of March, 2004. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative
  purposes in semiconductor product operation and application examples. The incorporation of these
  circuits, software and information in the design of a customer's equipment shall be done under the full
  responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by
  customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and
  "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

- "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.
- "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).
- "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

#### (Note)

- (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).